

SPEC No.	EA09722
ISSUE: Aug. 4. 1997	

To: _____

TENTATIVE SPECIFICATIONS

Product Type 240 Output LCD Common Driver

Model No. LH1537

※This tentative specifications contains 16 pages including the cover and appendix.
If you have any objections, please contact us before issuing purchasing order.


CUSTOMERS ACCEPTANCE

DATE: _____

BY: _____

PRESENTED

BY: T. Mineyama
T. Mineyama
Dept. General Manager



REVIEWED BY:

PREPARED BY:

K. Fushikawa K. Fushikawa

ENGINEERING DEPARTMENT I
LOGIC IC ENGINEERING CENTER
TENRI IC DEVELOPMENT GROUP
SHARP CORPORATION

- Handle this document carefully for it contains material protected by international copyright law. Any reproduction, full or in part, of this material is prohibited without the express written permission of the company.
- When using the products covered herein, please observe the conditions written herein and the precautions outlined in the following paragraphs. In no event shall the company be liable for any damages resulting from failure to strictly adhere to these conditions and precautions.
 - (1) The products covered herein are designed and manufactured for the following application areas. When using the products covered herein for the equipment listed in Paragraph (2), even for the following application areas, be sure to observe the precautions given in Paragraph (2). Never use the products for the equipment listed in Paragraph (3).
 - Office electronics
 - Instrumentation and measuring equipment
 - Machine tools
 - Audiovisual equipment
 - Home appliances
 - Communication equipment other than for trunk lines
 - (2) Those contemplating using the products covered herein for the following equipment which demands high reliability, should first contact a sales representative of the company and then accept responsibility for incorporating into the design fail-safe operation, redundancy, and other appropriate measures for ensuring reliability and safety of the equipment and the overall system.
 - Control and safety devices for airplanes, trains, automobiles, and other transportation equipment
 - Mainframe computers
 - Traffic control systems
 - Gas leak detectors and automatic cutoff devices
 - Rescue and security equipment
 - Other safety devices and safety equipment, etc.
 - (3) Do not use the products covered herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.
 - Aerospace equipment
 - Communications equipment for trunk lines
 - Control equipment for the nuclear power industry
 - Medical equipment related to life support, etc.
 - (4) Please direct all queries and comments regarding the interpretation of the above three Paragraphs to a sales representative of the company.
- Please direct all queries regarding the products covered herein to a sales representative of the company.

Contents

	Page
1. Summary	2
2. Features	2
3. Block Diagram	3
4. Functional Operations of Each Block	3
5. Pin Configuration	4
6. Pin Descriptions	4
7. Description of Functional Operations	7
8. Precaution	10
9. Absolute Maximum Ratings	11
10. Recommended Operating Conditions	11
11. Electrical Characteristics	11
12. Example of System Configuration	13
13. Example of Typical Characteristic	14

1. Summary

The LH1537 is a 240 output common driver LSI suitable for driving dot matrix LC panels using low voltage segment driving method.


With the use of SST (Super Slim TCP) technology, it is possible to decrease the size of the frame section of the LCD module.

Combined with the Segment Driver LH155E(SST) and Power Supply IC LR3694, it is possible to constitute a low power consumption LCD module.

2. Features

- Supply voltage for LC drive : +20.0 to +45.0 V
- Number of LC drive outputs : 240
- Output level : 3
- Correspond to low voltage segment driving method
- Controllable input signal directly from Controller
- Low power consumption
- Supply voltage for the logic system : +2.4 to +5.5 V
- Low output impedance : 600 Ω (Typ.)
- Shift clock frequency : 4.0 MHz(Max.) ($V_{DD}=+5\text{ V}\pm 10\%$)
: 3.0 MHz(Max.) ($V_{DD}=+2.4\text{ to }+4.5\text{ V}$)
- It is possible to select the number of LC drive outputs
(240 outputs or 200 outputs)
- Built-in 240-bits bidirectional shift register
- Shift register circuits are reset when $\overline{\text{DISPOFF}}$ active
- Built-in blanking period control
- 2 types of shift directions are pin-selectable
 - ① $O_1 \rightarrow O_{240}$ ($O_{21} \rightarrow O_{220}$)
 - ② $O_{240} \rightarrow O_1$ ($O_{220} \rightarrow O_{21}$)
- CMOS silicon gate process (P-type Silicon Substrate)
- Supports a LC panel display when combined with Segment Driver LH155E and Power Supply IC LR3694
- Package : 262 pin TCP (Tape Carrier Package)
- Not designed or rated as radiation hardened


3. Block Diagram

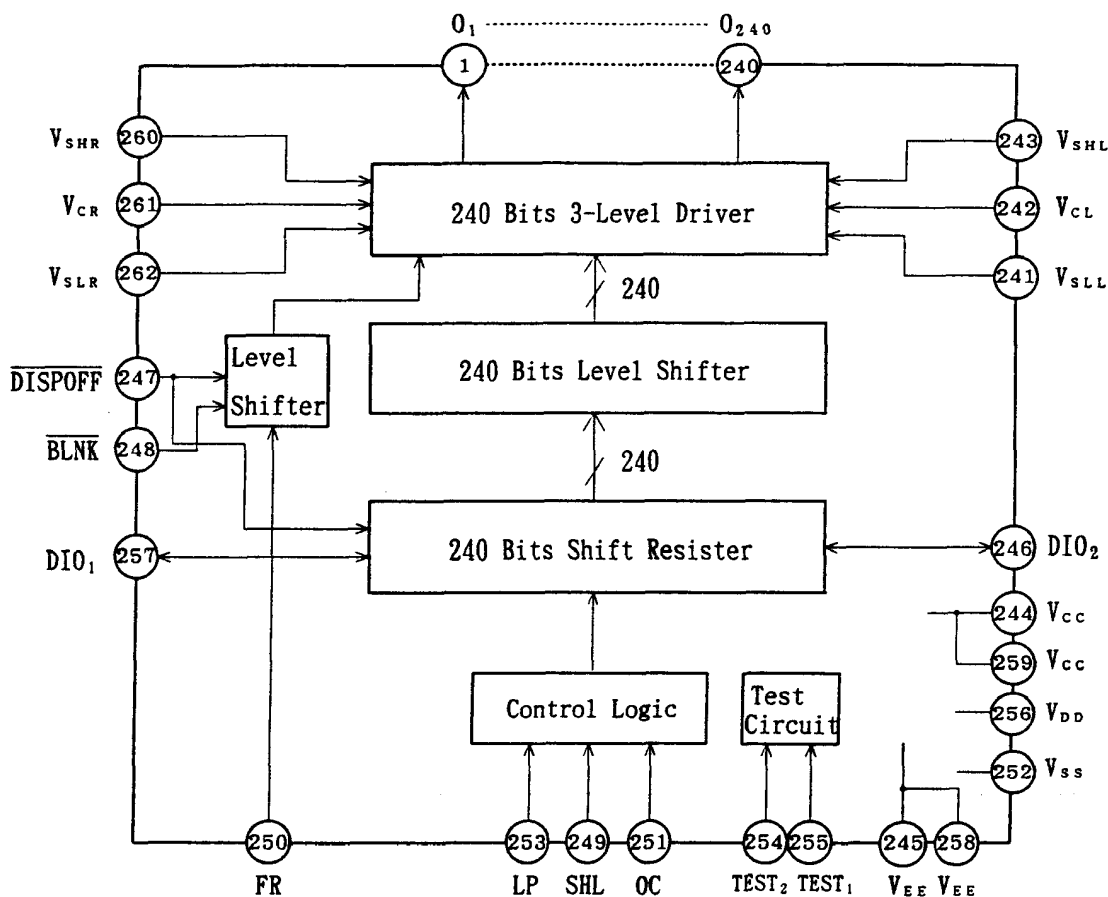

4. Functional Operation of Each Block

Block	Function
Shift Register	The data shift direction of the shift register is controlled by Control Logic Block. According to SHL signal, input data signal (from DIO ₁ or DIO ₂) is shifted to next shift register responding to the falling edge of the LP signal.
Level Shifter	Level Shifter Block shifts the voltage level from the logic voltage level to the LC drive voltage, and then outputs to the 3-level Driver Block.
3-Level Driver	3-Level Driver Block outputs a level which is selected among V _{SH} , V _C , V _{SL} based on Latch data, FR, DISPOFF, BLNK signals.
Control Logic	Control Logic Block controls the data shift direction of shift register according to SHL input signal.
Test Circuit	Test circuit is for the test. In general usage, it doesn't act.

5. Pin Configuration

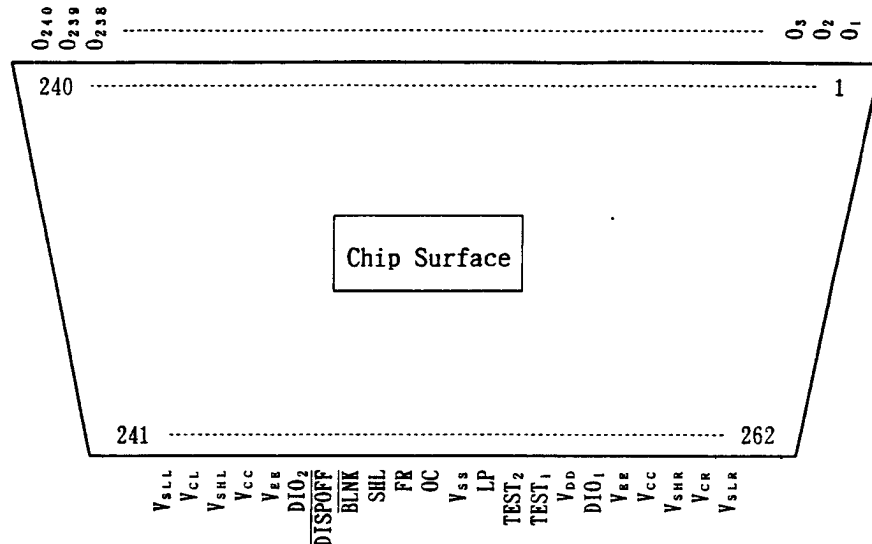


6. Pin Descriptions

6-1. Pin Designations

Pin No.	Symbol	I/O	Designation
1 ~ 240	O ₁ ~ O ₂₄₀	O	LC drive output
241, 262	V _{SLL} , V _{SLR}	-	Power supply for LC drive
242, 261	V _{CL} , V _{CR}	-	Power supply for LC drive
243, 260	V _{SHL} , V _{SHR}	-	Power supply for LC drive
244, 259	V _{CC}	-	Power supply for LC drive
245, 258	V _{EE}	-	Power supply for LC drive
246	DIO ₂	I/O	Data input/output for shift register
247	DISPOFF	I	Control input for unselect output level
248	BLNK	I	Control input for blanking period
249	SHL	I	Shift direction selection for shift register
250	FR	I	AC-converting signal input for LC drive waveform
251	OC	I	Selection pin for the number of LC driver output
252	V _{SS}	-	Power supply for logic system(0 V)
253	LP	I	Shift clock input for shift register
254	TEST ₂	I	Test mode selection input
255	TEST ₁	I	Test mode selection input
256	V _{DD}	-	Power supply for logic system(+2.4 to +5.5 V)
257	DIO ₁	I/O	Data input/output for shift register

6-2. Input/Output Circuits

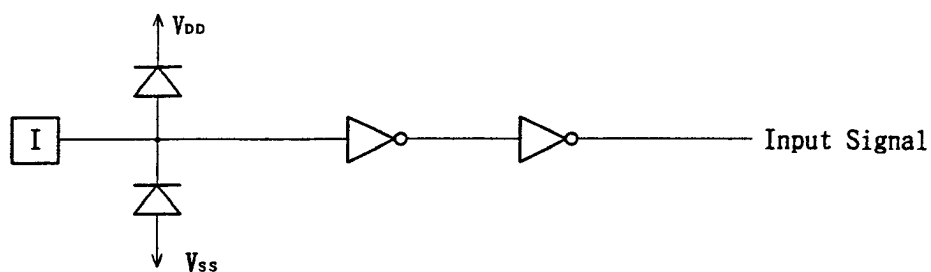

【Applicable pins】
SHL, DISPOFF
BLNK, FR, LP, OC

Fig.1 Input Circuit(1)


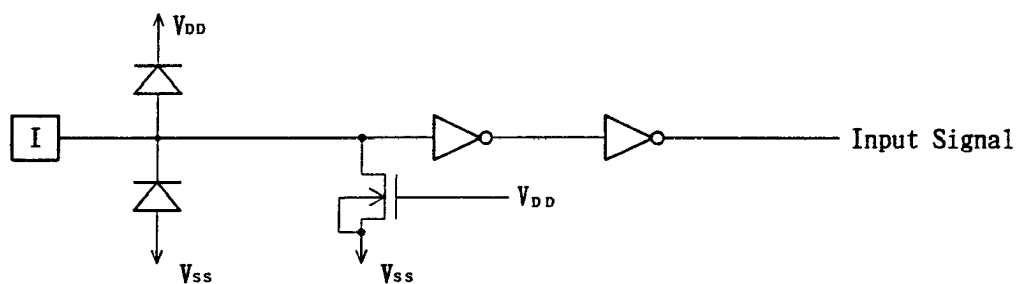



Fig.2 Input Circuit(3)

【Applicable pins】
TEST₁, TEST₂

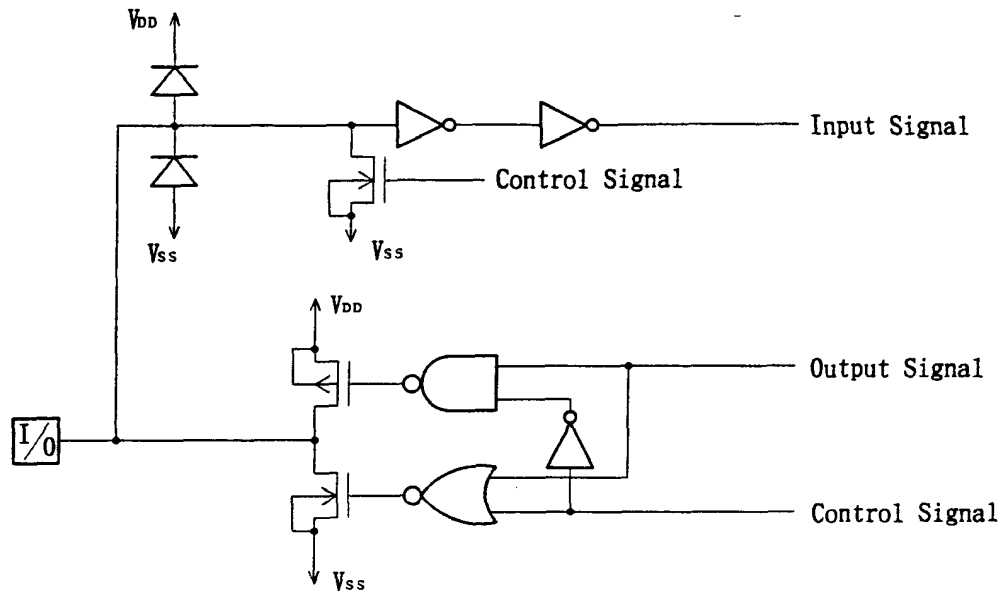

【Applicable pins】
DIO₁, DIO₂

Fig.3 Input/Output Circuit

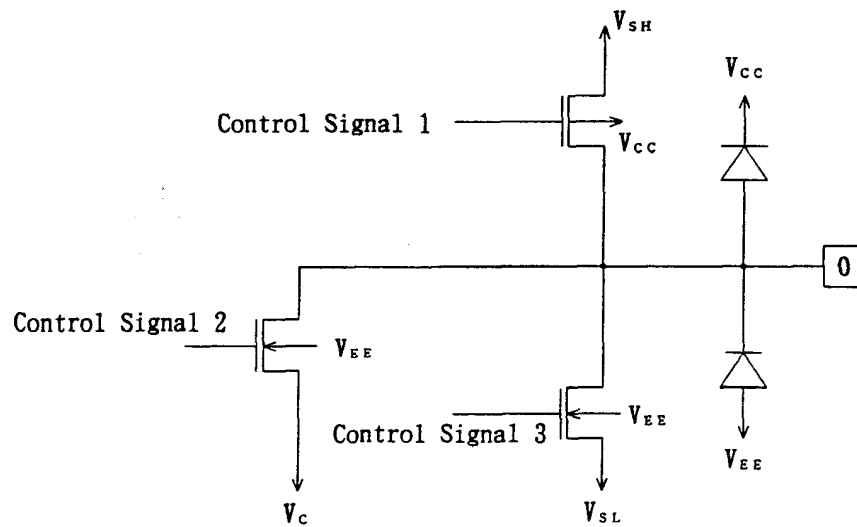

【Applicable pins】
O₁~O₂₄₀

Fig.4 LC Drive Output Circuit

7. Description of Functional Operations

7-1. Pin Functions

Symbol	Function
V_{DD}	Logic system power supply pin : connect to +2.4 to +5.5 V
V_{SS}	Logic system power supply pin : connect to 0 V
V_{EE}	Power supply pin for LC drive
V_{CC}	Power supply pin for LC drive
V_{SHL}, V_{SHR} V_{CL}, V_{CR} V_{SLL}, V_{SLR}	Bias power supply pin for LC driver • Generally, the bias voltages used are set by a resistor divider. • Keep the following relation : $V_{EE} \leq V_{SL} < V_C < V_{SH} \leq V_{CC}$ • To reduce the difference of the output waveforms between O_1 and O_{240}, please supply the voltage externally with V_{IR} and V_{IL} pins ($i=SH, C, SL$).
DIO_1	Shift data input/output pin for bidirectional shift register • Input pin when $SHL=L$, output pin when $SHL=H$. • When $SHL=L$, DIO_1 pin becomes pull-down. • When $SHL=H$, DIO_1 pin doesn't become pull-down.
DIO_2	Shift data input/output pin for bidirectional shift register • Input pin when $SHL=H$, output pin when $SHL=L$. • When $SHL=H$, DIO_2 pin becomes pull-down. • When $SHL=L$, DIO_2 pin doesn't become pull-down.
LP	Shift clock pulse input pin for bidirectional shift register • The data is shifted responding to the falling edge of the LP pulse.
SHL	Shift direction selection pin for bidirectional shift register • The data is shifted $O_1 \rightarrow O_{240}$ when set V_{SS} level "L", and the data is shifted $O_{240} \rightarrow O_1$ when set V_{DD} level "H".
OC	Selection pin for the number of LC driver output • Selectable 240 outputs mode or 200 outputs mode. • When set V_{SS} level "L", 200 outputs mode is selected, when set V_{DD} level "H", 240 outputs mode is selected. • When this LSI is 200 outputs mode, output pins which aren't used ($O_1 - O_{20}$, $O_{221} - O_{240}$) output the unselect level V_C.
$\overline{DISPOFF}$	Control input pin for output unselect level • This input signal is level-shifted from logic voltage level to LC drive voltage level, and controls LC drive circuit. • When set V_{SS} level "L", the LC drive output pins ($O_1 - O_{240}$) are set V_C level. • While $\overline{DISPOFF}=L$, all the shift registers are reset and don't read data. When the $\overline{DISPOFF}$ function is canceled, the shift data is read responding to the falling edge of the LP signal. However, the relation of timing between $\overline{DISPOFF}$ and LP should be kept. (AC characteristics are shown in page 12 and 13)

Symbol	Function
BLNK	Control input pin for blanking period •This input signal is level-shifted from logic voltage level to LC drive voltage level, and controls LC drive circuit. •When BLNK=L, blanking period mode is selected, the LC drive output pins(O_1-O_{240}) are set V_c level. - At this time, shift registers are active(not reset).
FR	AC conversion signal for output waveform •The input signal is level-shifted from logic voltage level to LC drive voltage level, and controls LC drive circuit. •Generally, input a frame inversion signal. •Output level of this driver is defined by shift registers output (Latch data) and FR signal. •Truth table is shown in 7-2-1.
TEST ₁ TEST ₂	Test mode selection pins •During normal operation, please fix V_{ss} level "L".
O_1-O_{240}	LC driver output pins •Corresponding to each bit of the shift register, one level (V_{SH}, V_c, V_{SL}) is selected and output.

7-2. Functional Operations

7-2-1. Truth Table

FR	Latch	Data	DISPOFF	BLNK	Driver Output Voltage Level (O_1-O_{240})
L	L		H	H	V_C
L	H		H	H	V_{SH}
H	L		H	H	V_C
H	H		H	H	V_{SL}
x	x		H	L	V_C
x	x		L	x	V_C

Here, $V_{EE} \leq V_{SL} < V_C < V_{SH} \leq V_{CC}$. L: V_{SS} (0 V), H: V_{DD} (+2.4 V to +5.5 V), x: Don't care

【Note】"Don't care" should be fixed to "H" or "L", avoiding floating.

There are two kinds of power supply (logic level voltage, LC drive voltage) for LCD driver. Please supply regular voltage which assigned by specification for each power pin.

7-2-2. Relationship between the Data I/O Pins and Data Transfer Direction

OC	SHL	Data Transfer Direction	DIO ₁	DIO ₂
L	L(shift to right)	$O_{21} \rightarrow O_{220}$	Input	Output
(200 outputs)	H(shift to left)	$O_{220} \rightarrow O_{21}$	Output	Input
H	L(shift to right)	$O_1 \rightarrow O_{240}$	Input	Output
(240 outputs)	H(shift to left)	$O_{240} \rightarrow O_1$	Output	Input

Here, L: V_{SS} (0 V), H: V_{DD} (+2.4 V to +5.5 V)

8. Precaution

○Precaution when connecting or disconnecting the power

This LSI is a LCD driver to fit high-voltage usage. So, there is a fear that this LSI may be permanently destroyed by high current, if LC drive power is supplied when the logic system power is floating.


The power supply sequence is as follows.

- When connecting the power supply, connect the LC drive power after connecting the logic system power. Furthermore, when disconnecting the power supply, disconnect the logic system power after disconnecting the LC drive power.
- We recommend you to connect the serial resistor (50 to 100Ω) or fuse to the drive power V_{CC} of the system as a current limiter. And set up the suitable value of the resistor in consideration of LC display grade.

And the condition of inside of this LSI(the condition of shift register) is indefinite right after the logic power is supplied. Therefore first, please reset the logic condition(of shift register) of the inside of this LSI using DISPOFF function. Then please supply the LC drive power.

After the LC drive power has become stable, please cancel DISPOFF function. When disconnecting the power, please set the output of this LSI to V_c level using DISPOFF function. After that, please disconnect the LC drive power, then disconnect the logic system power.

The recommend sequence of power supply is as follows.

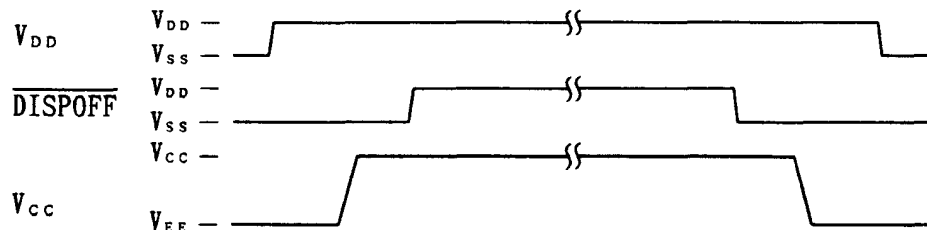

9. Absolute Maximum Ratings

Parameter	Symbol	Conditions	Applicable pins	Ratings	Unit
Supply voltage (1)	V_{DD}	$T_a=25\text{ }^{\circ}\text{C}$	V_{DD}	$V_{EE}-0.3$ to $V_{EE}+31.0$	V
	V_{SS}	Referenced	V_{SS}	$V_{EE}-0.3$ to $V_{EE}+31.0$	V
	$V_{DD}-V_{SS}$	to V_{EE}	V_{DD}, V_{SS}	-0.3 to +7.0	V
Supply voltage (2)	V_{CC}		V_{CC}	$V_{EE}-0.3$ to $V_{EE}+48.0$	V
	V_{SH}		V_{SHL}, V_{SHR}	$V_{EE}-0.3$ to $V_{CC}+0.3$	V
	V_C		V_{CL}, V_{CR}	$V_{EE}-0.3$ to $V_{CC}+0.3$	V
	V_{SL}		V_{SLL}, V_{SLR}	$V_{EE}-0.3$ to $V_{CC}+0.3$	V
Input voltage	V_I		DIO ₁ , DIO ₂ , SHL, LP, FR, OC, DISPOFF, BLNK	$V_{SS}-0.3$ to $V_{DD}+0.3$	V
Storage temperature	T_{stg}			-45 to +125	$^{\circ}\text{C}$

10. Recommended Operating Conditions

Parameter	Symbol	Conditions	Applicable pins	Min.	Typ.	Max.	Unit
Supply voltage(1)	V_{DD}	Note	V_{DD}	$V_{SS}+2.4$		$V_{SS}+5.5$	V
Supply voltage(2)	V_{CC}	Referenced	V_{CC}	$V_{SS}+12.5$		$V_{SS}+25$	V
Supply voltage(3)	V_{EE}	to V_{SS}	V_{EE}	$V_{SS}-20$		$V_{SS}-7.5$	V
Operating temperature	T_{opr}			-30		+85	$^{\circ}\text{C}$

【Note】 Keep the following relation : $V_{EE} \leq V_{SL} < V_C < V_{SH} \leq V_{CC}$

11. Electrical Characteristics

11-1. DC Characteristics

($V_{SS}=0\text{ V}$, $V_{DD}=+2.4$ to $+5.5\text{ V}$, $V_{CC}-V_{EE}=+20$ to $+45.0\text{ V}$, $T_a=-30$ to $+85\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Conditions	Applicable pins	Min.	Typ.	Max.	Unit
Input voltage	V_{IH}		DIO ₁ , DIO ₂ , SHL, LP, FR, DISPOFF, BLNK, OC	0.8 V_{DD}			V
	V_{IL}					0.2 V_{DD}	V
Output voltage	V_{OH}	$I_{OH}=-0.4\text{ mA}$	DIO ₁ , DIO ₂	$V_{DD}-0.4$			V
	V_{OL}	$I_{OL}=+0.4\text{ mA}$				+0.4	V
Input leakage current	$I_{L IH}$	$V_I=V_{DD}$	SHL, LP, FR, DISPOFF, BLNK, OC			+10.0	μA
	$I_{L IL}$	$V_I=V_{SS}$	SHL, LP, FR, DISPOFF, BLNK, OC, DIO ₁ , DIO ₂			-10.0	μA
Input pull-down current	I_{PD}	$V_I=V_{DD}$	DIO ₁ , DIO ₂			+100.0	μA
Output resistance	R_{ON}	$ \Delta V_{ON} =0.5\text{ V}^*$	O ₁ -O ₂₄₀		0.6	1.0	k Ω
Stand-by current (1)	I_{STB1}	*2	V_{DD}			50.0	μA
Stand-by current (2)	I_{STB2}	*2	V_{CC}			50.0	μA
Consumed current (1)	I_{DD}	*3	V_{DD}				μA
Consumed current (2)	I_{CC}	*3	V_{CC}				μA

【Note】 *1: $V_{CC}=V_{SH}=+22.5\text{ V}$, $V_C=+2.5\text{ V}$, $V_{EE}=V_{SL}=-17.5\text{ V}$, $V_{DD}=+5.0\text{ V}$

*2: $V_{CC}=V_{SH}=+25\text{ V}$, $V_C=+2.5\text{ V}$, $V_{EE}=V_{SL}=-20\text{ V}$, $V_{DD}=+5.0\text{ V}$, $V_I=V_{SS}$

*3: $V_{CC}=V_{SH}=+25\text{ V}$, $V_C=+2.5\text{ V}$, $V_{EE}=V_{SL}=-20\text{ V}$, $V_{DD}=+5.0\text{ V}$


$f_{LP}=19.2\text{ kHz}$, $f_{FR}=80\text{ Hz}$. 1/240 Duty operation, No-load

11-2. AC Characteristics


(V_{SS}=0 V, V_{DD}=+2.4 to +5.5 V, V_{CC}-V_{EE}=+20 to +45 V, Ta=-30 to +85 °C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Shift clock period	t_{LP}	V _{DD} =+5 V±10%	250			ns
		V _{DD} =+2.4 to +4.5 V	330			ns
Shift clock "H" pulse width	t_{WLPH}	V _{DD} =+5 V±10%	30			ns
		V _{DD} =+2.4 to +4.5 V	60			ns
Shift clock "L" pulse width	t_{WLPL}	V _{DD} =+5 V±10%	120			ns
		V _{DD} =+2.4 to +4.5 V	170			ns
Data setup time	t_{SV}		50			ns
Data hold time	t_H		50			ns
Input signal rise time	t_r				50	ns
Input signal fall time	t_f				50	ns
DISPOFF removal time	t_{SD}		120			ns
DISPOFF "L" pulse width	t_{WDL}		1.2			μs
Output delay time (1)	t_D	C _L =15 pF V _{DD} =+5 V±10%			170	ns
		C _L =15 pF V _{DD} =+2.4 to +4.5 V			250	ns
Output delay time (2)	t_{pd1}, t_{pd2}	C _L =15 pF			1.2	μs
Output delay time (3)	t_{pd3}	C _L =15 pF			1.2	μs
Output delay time (4)	t_{pd4}	C _L =15 pF			1.2	μs

11-3. Timing Diagram

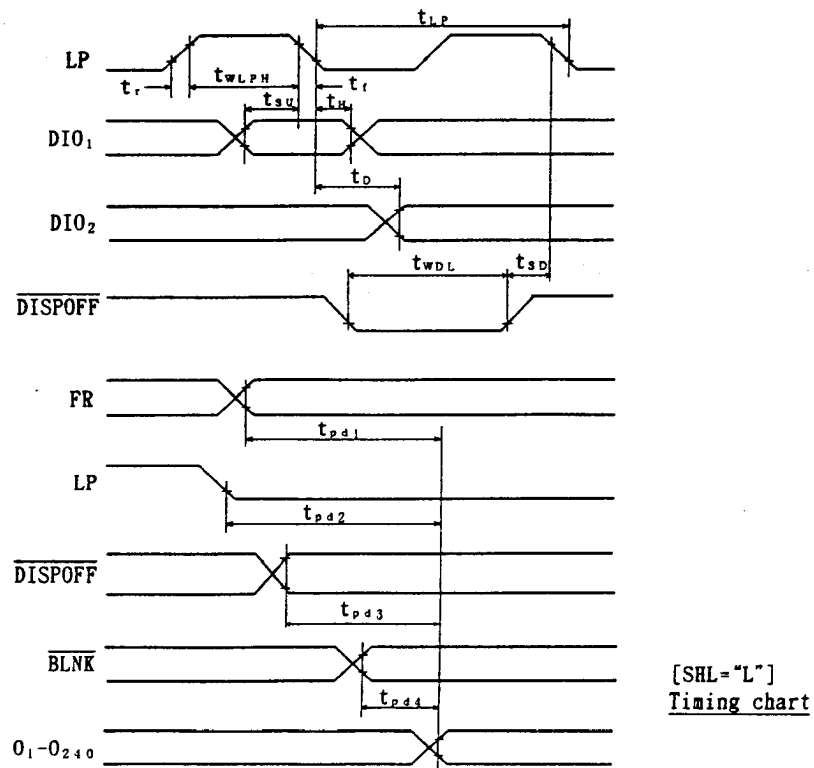

12. Example of System configuration

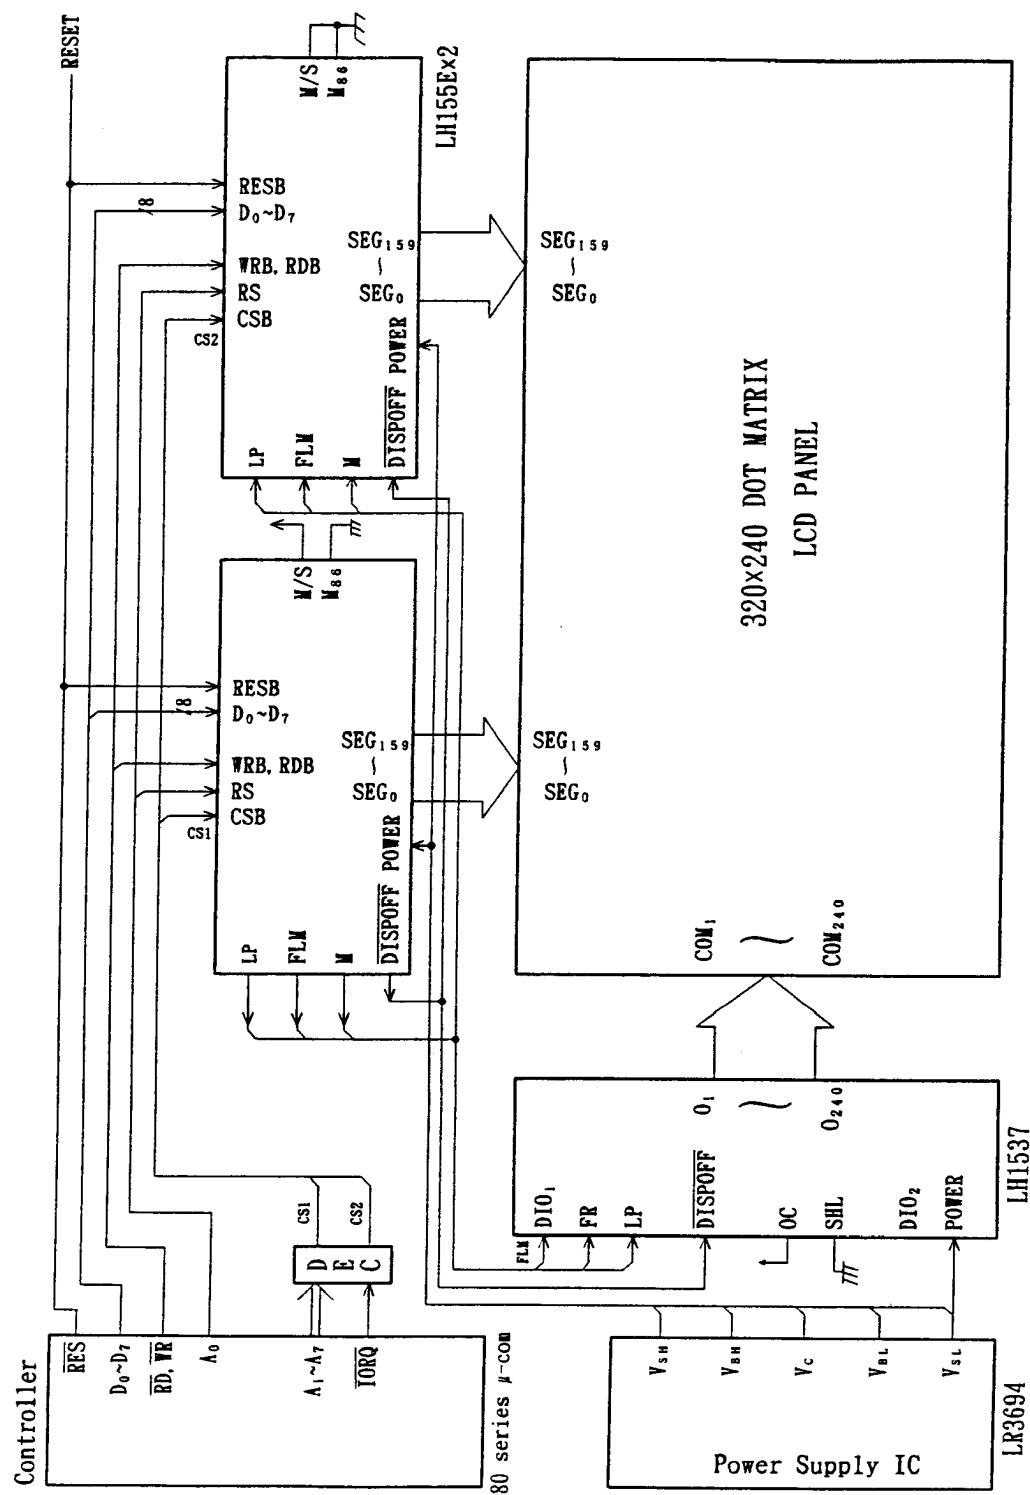

13. Example of Typical Characteristic

(Ta=+25 °C, V_{SS}=0 V, V_{DD}=+5.0 V)

Parameter	Min.	Typ.	Max.	Unit
Typical Fundamental Rating Propagation Delay Time		10		ns