


HYS72D16500HR-7-C
HYS72D32501HR-7-C

184 - Pin Registered Dual-In- Memory Modules
RDIMM



Memory Products

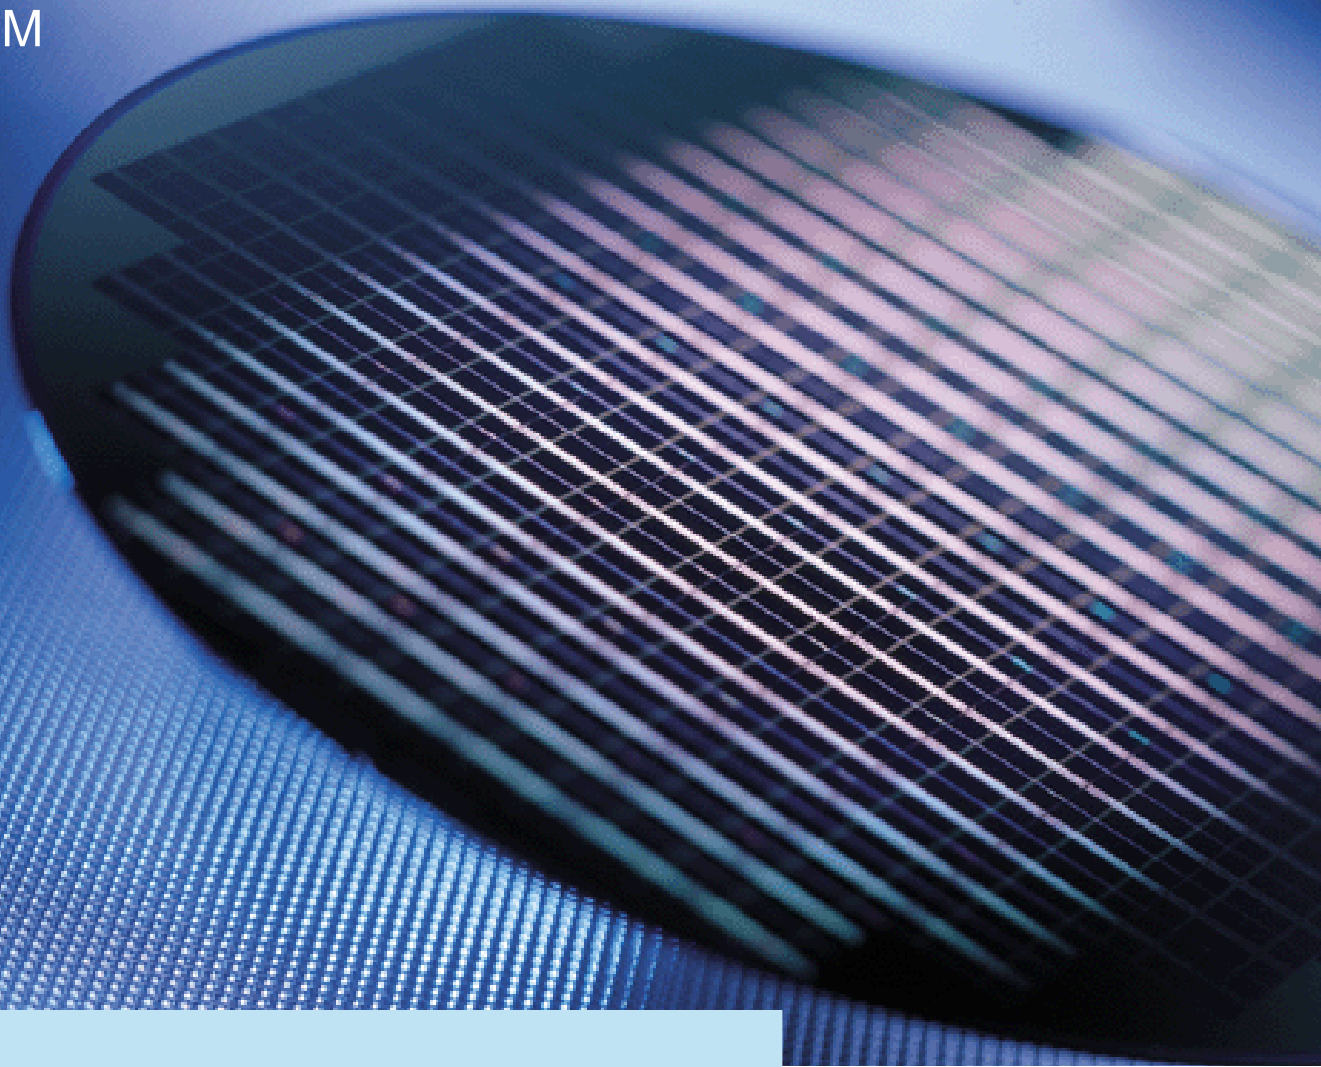

N e v e r s t o p t h i n k i n g .

Edition 2004-04

**Published by Infineon Technologies AG,
St.-Martin-Strasse 53,
81669 München, Germany**

**© Infineon Technologies AG 2004.
All Rights Reserved.**

Attention please!

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

HYS72D16500HR-7-C
HYS72D32501HR-7-C

184 - Pin Registered Dual-In- Memory Modules
RDIMM

Memory Products



HYS72D16500HR-7-C, HYS72D32501HR-7-C

Revision History:	Rev. 1.0	2004-04
Previous Version:	Rev. 0.5	2003-12
Page	Subjects (major changes since last revision)	
18	updated I_{DD} values	
13,14,24,25	editorial changes	

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?
 Your feedback will help us to continuously improve the quality of this document.
 Please send your proposal (including a reference to this document) to:
techdoc.mp@infineon.com



Table of Contents **Page**

Table of Contents

1	Overview	6
1.1	Features	6
1.2	Description	6
2	Pin Configuration	8
3	Electrical Characteristics	15
3.1	Operating Conditions	15
4	Current Specification and Conditions	18
4.1	AC Characteristics	19
5	SPD Contents	21
6	Package Outlines	24
7	Application Note	26

1 Overview

1.1 Features

- 184-Pin Registered 8-Byte Dual-In-Line DDR SDRAM Module for “1U” PC, Workstation and Server main memory applications
- One rank 16M × 72, 32M × 72 organization
- JEDEC standard Double Data Rate Synchronous DRAMs (DDR SDRAM) with a single + 2.5 V (± 0.2 V) power supply
- Built with 128-Mbit DDR SDRAMs in P-TSOP-66-1 packages
- Programmable CAS Latency, Burst Length, and Wrap Sequence (Sequential & Interleave)
- Auto Refresh (CBR) and Self Refresh
- All inputs and outputs SSTL_2 compatible
- Re-drive for all input signals using register and PLL devices.
- Serial Presence Detect with E²PROM
- Low Profile Modules form factor:
133.35 mm × 30,40 mm (1.2”) × 4.00 mm
- JEDEC standard reference layout for one rank 128MB:
PC2100 Registered DIMM Raw Cards L,M
- Gold plated contacts

Table 1 Performance

Part Number Speed Code		-7	Unit
Speed Grade	Component	DDR266A	—
	Module	PC2100–2033	—
max. Clock Frequency	@CL3	f_{CK3}	—
	@CL2.5	$f_{CK2.5}$	143
	@CL2	f_{CK2}	133

1.2 Description

The HYS72D[16/32][500/501]HR-7-C are low profile versions of the standard Registered DIMM modules with 1.2” inch (30,40 mm) height for 1U Server Applications. The Low Profile DIMM versions are available as 16M × 72 (128MB), 32M × 72 (256MB).

The memory array is designed with Double Data Rate Synchronous DRAMs for ECC applications. All control and address signals are re-driven on the DIMM using register devices and a PLL for the clock distribution. This reduces capacitive loading to the system bus, but adds one cycle to the SDRAM timing. A variety of decoupling capacitors are mounted on the PC board. The DIMMs feature serial presence detect based on a serial E²PROM device using the 2-pin I²C protocol. The first 128 bytes are programmed with configuration data and the second 128 bytes are available to the customer.

Table 2 **Ordering Information**

Type	Compliance Code	Description	SDRAM Technology
PC2100			
HYS72D16500HR-7-C	PC2100R-20331-L	1 Rank 128 MB Registered DIMM ECC	128 Mbit (×8)
HYS72D32501HR-7-C	PC2100R-20331-M	1 Rank 256 MB Registered DIMM ECC	128 Mbit (×4)

2 Pin Configuration

The pin configuration of the Registered DDR SDRAM DIMM is listed by function in **Table 3** (184 pins). The abbreviations used in columns Pin and Buffer Type are explained in **Table 4** and **Table 5** respectively. The pin numbering is depicted in **Figure 1**.

Table 3 Pin Configuration of RDIMM

Pin#	Name	Pin Type	Buffer Type	Function
Clock Signals				
137	CK0	I	SSTL	Clock Signal
138	$\overline{\text{CK0}}$	I	SSTL	Complement Clock
21	CKE0	I	SSTL	Clock Enable Rank 0
111	CKE1	I	SSTL	Clock Enable Rank 1 <i>Note: 2-rank module</i>
	NC	NC	SSTL	<i>Note: 1-rank module</i>
Control Signals				
157	$\overline{\text{S0}}$	I	SSTL	Chip Select of Rank 0
158	$\overline{\text{S1}}$	I	SSTL	Chip Select of Rank 1 <i>Note: 2-ranks module</i>
	NC	NC	–	<i>Note: 1-rank module</i>
154	$\overline{\text{RAS}}$	I	SSTL	Row Address Strobe
65	$\overline{\text{CAS}}$	I	SSTL	Column Address Strobe
63	$\overline{\text{WE}}$	I	SSTL	Write Enable
10	$\overline{\text{RESET}}$	I	LV-CMOS	Register Reset Forces registered inputs low <i>Note: For detailed description of the Power Up and Power Management see the Application Note at the end of data sheet</i>
Address Signals				
59	BA0	I	SSTL	Bank Address Bus 1:0
52	BA1	I	SSTL	
48	A0	I	SSTL	Address Bus 11:0
43	A1	I	SSTL	
41	A2	I	SSTL	
130	A3	I	SSTL	
37	A4	I	SSTL	
32	A5	I	SSTL	

Table 3 Pin Configuration of RDIMM (cont'd)

Pin#	Name	Pin Type	Buffer Type	Function
125	A6	I	SSTL	Address Bus 11:0
29	A7	I	SSTL	
122	A8	I	SSTL	
27	A9	I	SSTL	
141	A10	I	SSTL	
	AP	I	SSTL	
118	A11	I	SSTL	Address Signal 12 <i>Note: Module based on 256 Mbit or larger dies</i>
115	A12	I	SSTL	
	NC	NC	–	
167	A13	I	SSTL	Address Signal 13 <i>Note: 1 Gbit based module</i>
	NC	NC	–	<i>Note: Module based on 512 Mbit or smaller dies</i>
Data Signals				
2	DQ0	I/O	SSTL	Data Bus 63:0
4	DQ1	I/O	SSTL	
6	DQ2	I/O	SSTL	
8	DQ3	I/O	SSTL	
94	DQ4	I/O	SSTL	
95	DQ5	I/O	SSTL	
98	DQ6	I/O	SSTL	
99	DQ7	I/O	SSTL	
12	DQ8	I/O	SSTL	
13	DQ9	I/O	SSTL	
19	DQ10	I/O	SSTL	
20	DQ11	I/O	SSTL	
105	DQ12	I/O	SSTL	
106	DQ13	I/O	SSTL	
109	DQ14	I/O	SSTL	
110	DQ15	I/O	SSTL	
23	DQ16	I/O	SSTL	
24	DQ17	I/O	SSTL	
28	DQ18	I/O	SSTL	
31	DQ19	I/O	SSTL	

Pin Configuration

Table 3 Pin Configuration of RDIMM (cont'd)

Pin#	Name	Pin Type	Buffer Type	Function
114	DQ20	I/O	SSTL	Data Bus 63:0
117	DQ21	I/O	SSTL	
121	DQ22	I/O	SSTL	
123	DQ23	I/O	SSTL	
33	DQ24	I/O	SSTL	
35	DQ25	I/O	SSTL	
39	DQ26	I/O	SSTL	
40	DQ27	I/O	SSTL	
126	DQ28	I/O	SSTL	
127	DQ29	I/O	SSTL	
131	DQ30	I/O	SSTL	
133	DQ31	I/O	SSTL	
53	DQ32	I/O	SSTL	
55	DQ33	I/O	SSTL	
57	DQ34	I/O	SSTL	
60	DQ35	I/O	SSTL	
146	DQ36	I/O	SSTL	
147	DQ37	I/O	SSTL	
150	DQ38	I/O	SSTL	
151	DQ39	I/O	SSTL	
61	DQ40	I/O	SSTL	
64	DQ41	I/O	SSTL	
68	DQ42	I/O	SSTL	
69	DQ43	I/O	SSTL	
153	DQ44	I/O	SSTL	
155	DQ45	I/O	SSTL	
161	DQ46	I/O	SSTL	
162	DQ47	I/O	SSTL	
72	DQ48	I/O	SSTL	
73	DQ49	I/O	SSTL	
79	DQ50	I/O	SSTL	
80	DQ51	I/O	SSTL	
165	DQ52	I/O	SSTL	
166	DQ53	I/O	SSTL	
170	DQ54	I/O	SSTL	
171	DQ55	I/O	SSTL	
83	DQ56	I/O	SSTL	
84	DQ57	I/O	SSTL	
87	DQ58	I/O	SSTL	
88	DQ59	I/O	SSTL	

Table 3 Pin Configuration of RDIMM (cont'd)

Pin#	Name	Pin Type	Buffer Type	Function
174	DQ60	I/O	SSTL	Data Bus 63:0
175	DQ61	I/O	SSTL	
178	DQ62	I/O	SSTL	
179	DQ63	I/O	SSTL	
44	CB0	I/O	SSTL	
45	CB1	I/O	SSTL	Check Bits 7:0
49	CB2	I/O	SSTL	
51	CB3	I/O	SSTL	
134	CB4	I/O	SSTL	
135	CB5	I/O	SSTL	
142	CB6	I/O	SSTL	
144	CB7	I/O	SSTL	
5	DQS0	I/O	SSTL	Data Strobes 8:0 <i>Note: See block diagram for corresponding DQ signals</i>
14	DQS1	I/O	SSTL	
25	DQS2	I/O	SSTL	
36	DQS3	I/O	SSTL	
56	DQS4	I/O	SSTL	
67	DQS5	I/O	SSTL	Data Strobes 8:0
78	DQS6	I/O	SSTL	
86	DQS7	I/O	SSTL	
47	DQS8	I/O	SSTL	Data Mask 0 <i>Note: x8 based module</i>
97	DM0	I	SSTL	
	DQS9	I/O	SSTL	Data Strobe 9 <i>Note: x4 based module</i>
107	DM1	I	SSTL	Data Mask 1 <i>Note: x8 based module</i>
	DQS10	I/O	SSTL	
119	DM2	I	SSTL	Data Mask 2 <i>Note: x8 based module</i>
	DQS11	I/O	SSTL	
129	DM3	I	SSTL	Data Mask 3 <i>Note: x8 based module</i>
	DQS12	I/O	SSTL	

Table 3 Pin Configuration of RDIMM (cont'd)

Pin#	Name	Pin Type	Buffer Type	Function
149	DM4	I	SSTL	Data Mask 4 <i>Note: x8 based module</i>
	DQS13	I/O	SSTL	Data Strobe 13 <i>Note: x4 based module</i>
159	DM5	I	SSTL	Data Mask 5 <i>Note: x8 based module</i>
	DQS14	I/O	SSTL	Data Strobe 14 <i>Note: x4 based module</i>
169	DM6	I	SSTL	Data Mask 6 <i>Note: x8 based module</i>
	DQS15	I/O	SSTL	Data Strobe 15 <i>Note: x4 based module</i>
177	DM7	I	SSTL	Data Mask 7 <i>Note: x8 based module</i>
	DQS16	I/O	SSTL	Data Strobe 16 <i>Note: x4 based module</i>
140	DM8	I	SSTL	Data Mask 8 <i>Note: x8 based module</i>
	DQS17	I/O	SSTL	Data Strobe 17 <i>Note: x4 based module</i>
EEPROM				
92	SCL	I	CMOS	Serial Bus Clock
91	SDA	I/O	OD	Serial Bus Data
181	SA0	I	CMOS	Slave Address Select Bus 2:0
182	SA1	I	CMOS	
183	SA2	I	CMOS	
Power Supplies				
1	V_{REF}	AI	–	I/O Reference Voltage
184	V_{DDSPD}	PWR	–	EEPROM Power Supply

Table 3 Pin Configuration of RDIMM (cont'd)

Pin#	Name	Pin Type	Buffer Type	Function
15, 22, 30, 54, 62, 77, 96, 104, 112, 128, 136, 143, 156, 164, 172, 180	V_{DDQ}	PWR	–	I/O Driver Power Supply
7, 38, 46, 70, 85, 108, 120, 148, 168	V_{DD}	PWR	–	Power Supply
3, 11, 18, 26, 34, 42, 50, 58, 66, 74, 81, 89, 93, 100, 116, 124, 132, 139, 145, 152, 160, 176	V_{SS}	GND	–	Ground Plane

Pin Configuration

Table 3 Pin Configuration of RDIMM (cont'd)

Pin#	Name	Pin Type	Buffer Type	Function
Other Pins				
82	V _{DDID}	O	OD	V_{DD} Identification <i>Note: Pin in tristate, indicating V_{DD} and V_{DDQ} nets connected on PCB</i>
9, 16, 17, 71, 75, 76, 90, 101, 102, 103, 113, 163, 173	NC	NC	–	Not connected Pins not connected on Infineon RDIMM's


Table 4 Abbreviations for Pin Type

Abbreviation	Description
I	Standard input-only pin. Digital levels.
O	Output. Digital levels.
I/O	I/O is a bidirectional input/output signal.
AI	Input. Analog levels.
PWR	Power
GND	Ground
NU	Not Usable (JEDEC Standard)
NC	Not Connected (JEDEC Standard)

Table 5 Abbreviations for Buffer Type

Abbreviation	Description
SSTL	Serial Stub Terminated Logic (SSTL2)
LV-CMOS	Low Voltage CMOS
CMOS	CMOS Levels
OD	Open Drain. The corresponding pin has 2 operational states, active low and tristate, and allows multiple devices to share as a wire-OR.

Pin Configuration

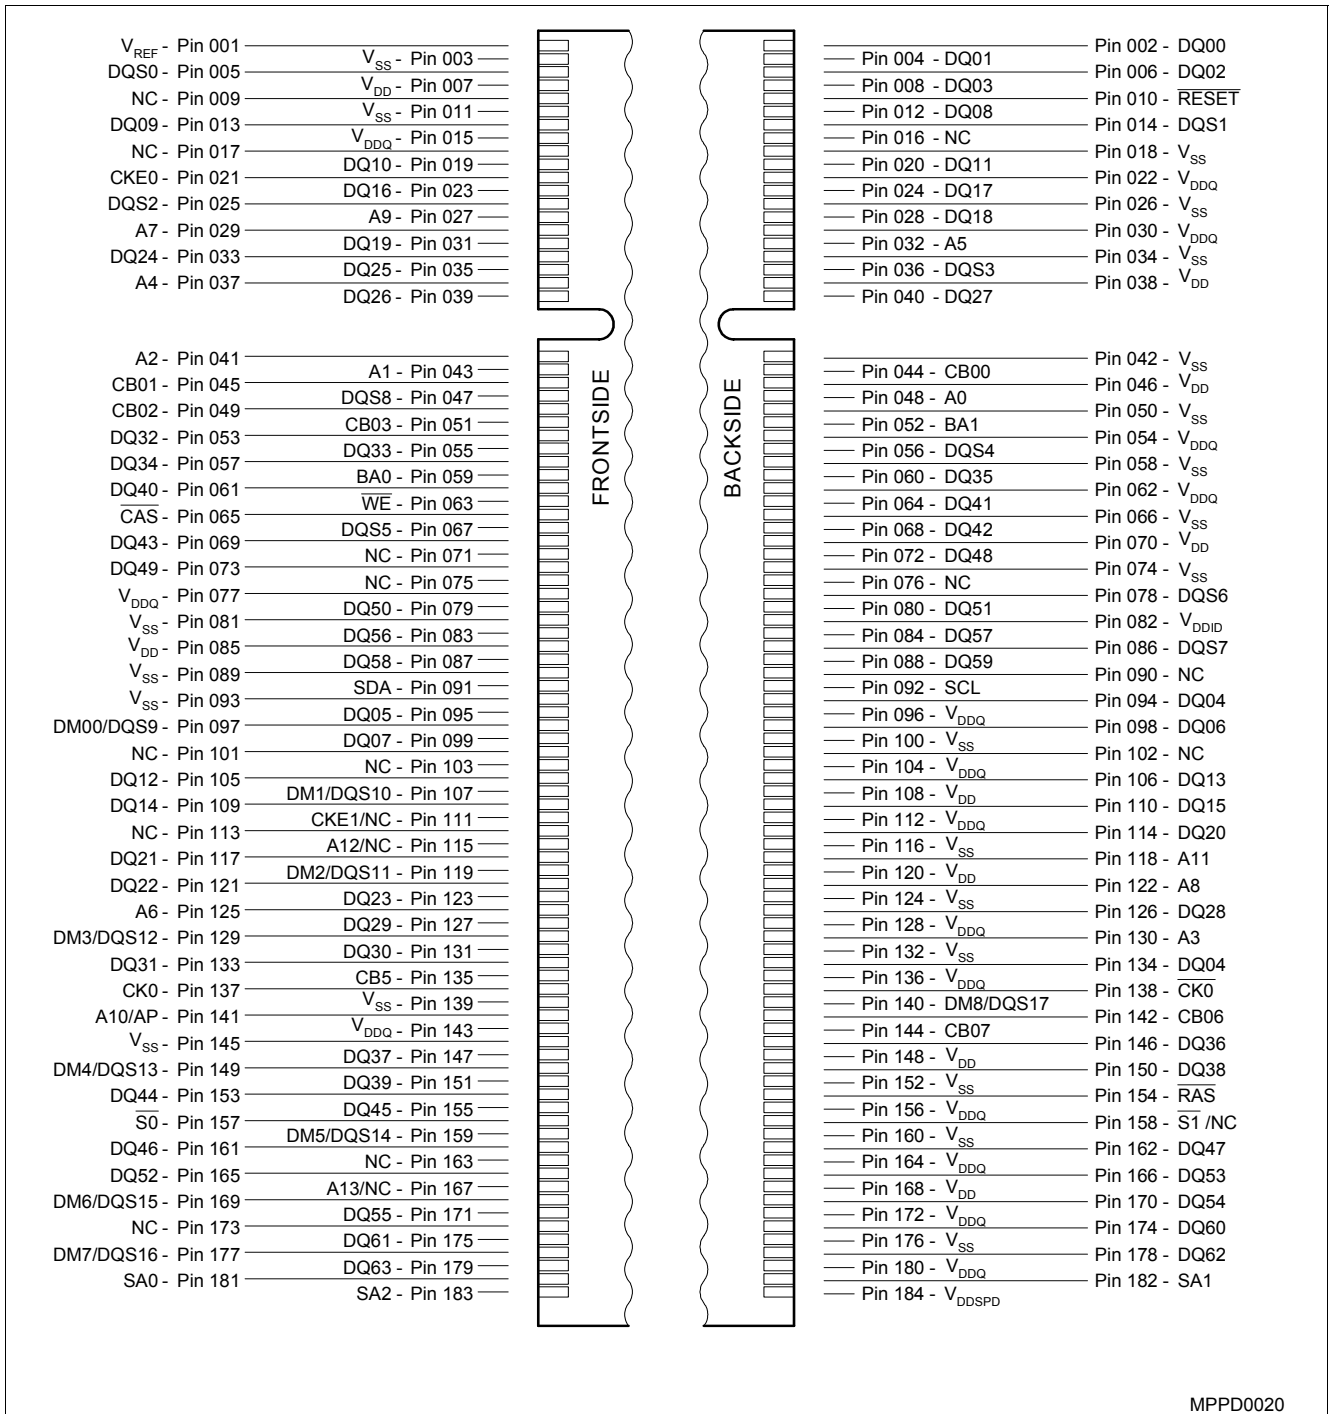

MPPD0020

Figure 1 Pin Configuration 184 Pins, Reg

Table 6 Address Table

Density	Organization	Memory Ranks	SDRAMs	# of SDRAMs	# of row/bank/columns bits	Refresh	Period	Interval
128 MB	16M ×8	1	128M ×8	9	12 / 2 / 10	4K	64 ms	15.6 μs
256 MB	32M ×4	1	128M ×4	18	12 / 2 / 11	4K	64 ms	15.6 μs

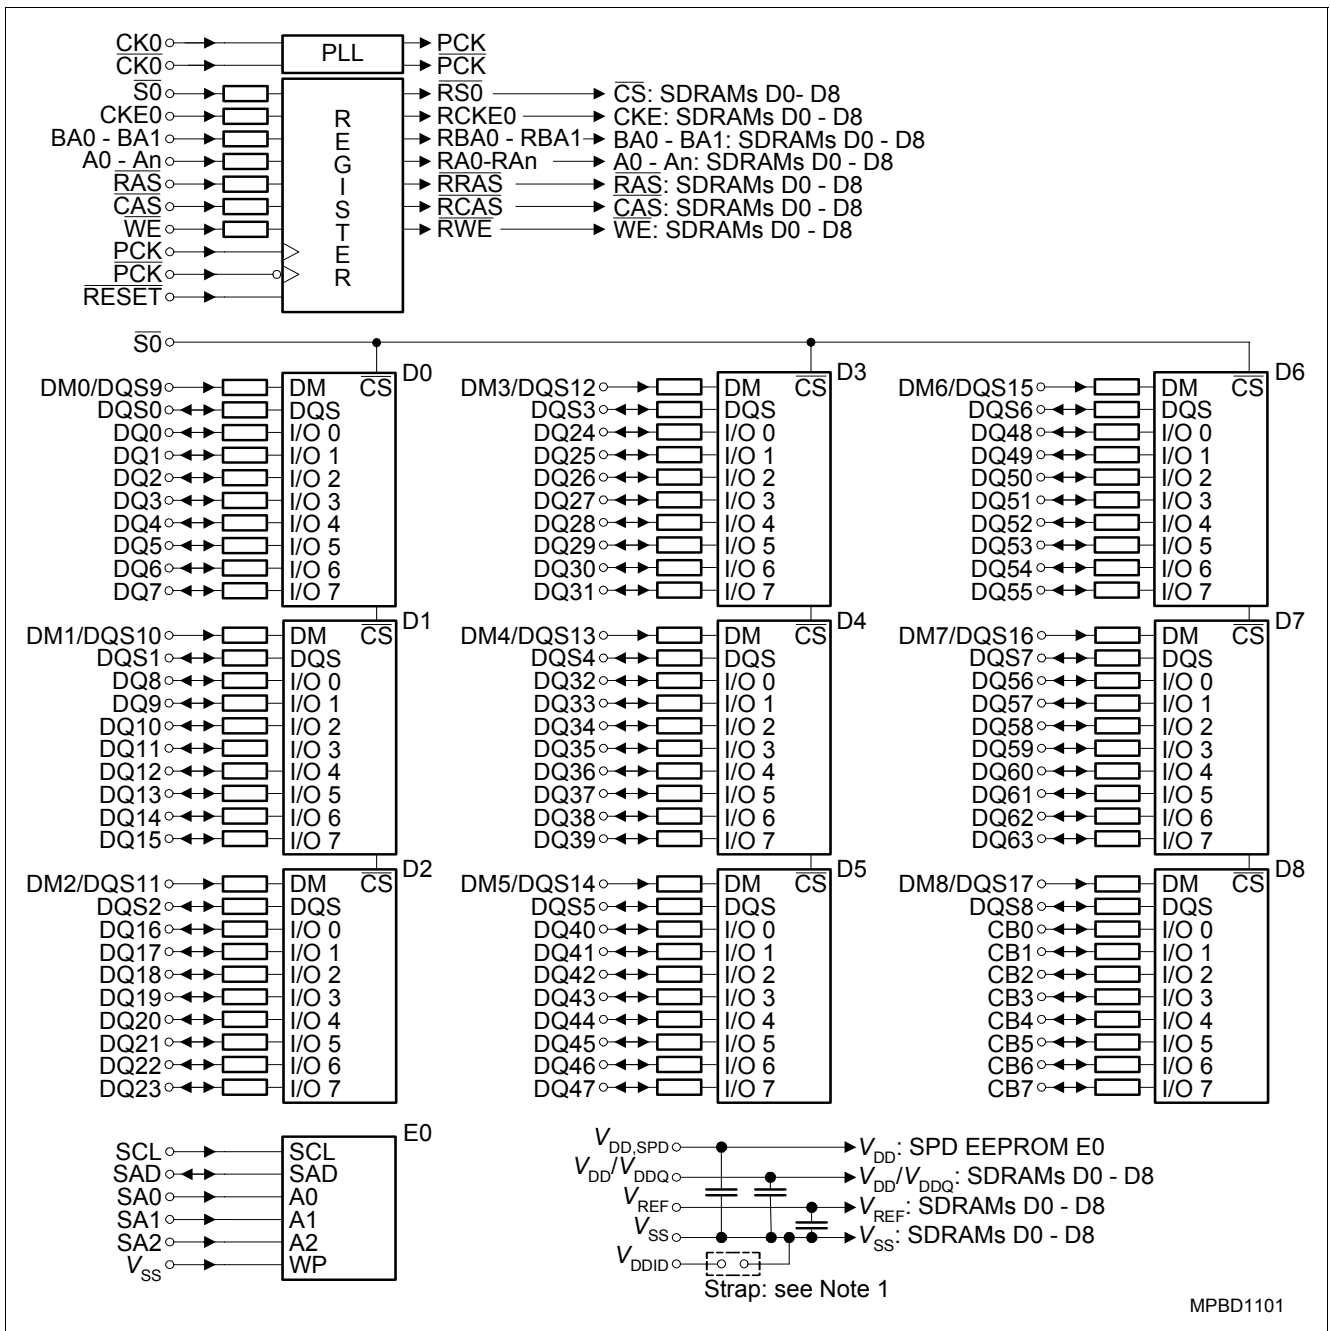


Figure 2 Block Diagram Raw Card L x72, 1 Rank, x8, ECC

Notes

- $V_{DD} = V_{DDQ}$, therefore V_{DDID} strap open
- DQ, DQS, DM resistors are 22 ohms $\pm 5\%$

- BA \bar{n} , An, \overline{RAS} , \overline{CAS} , \overline{WE} resistors are 22 ohms $\pm 5\%$

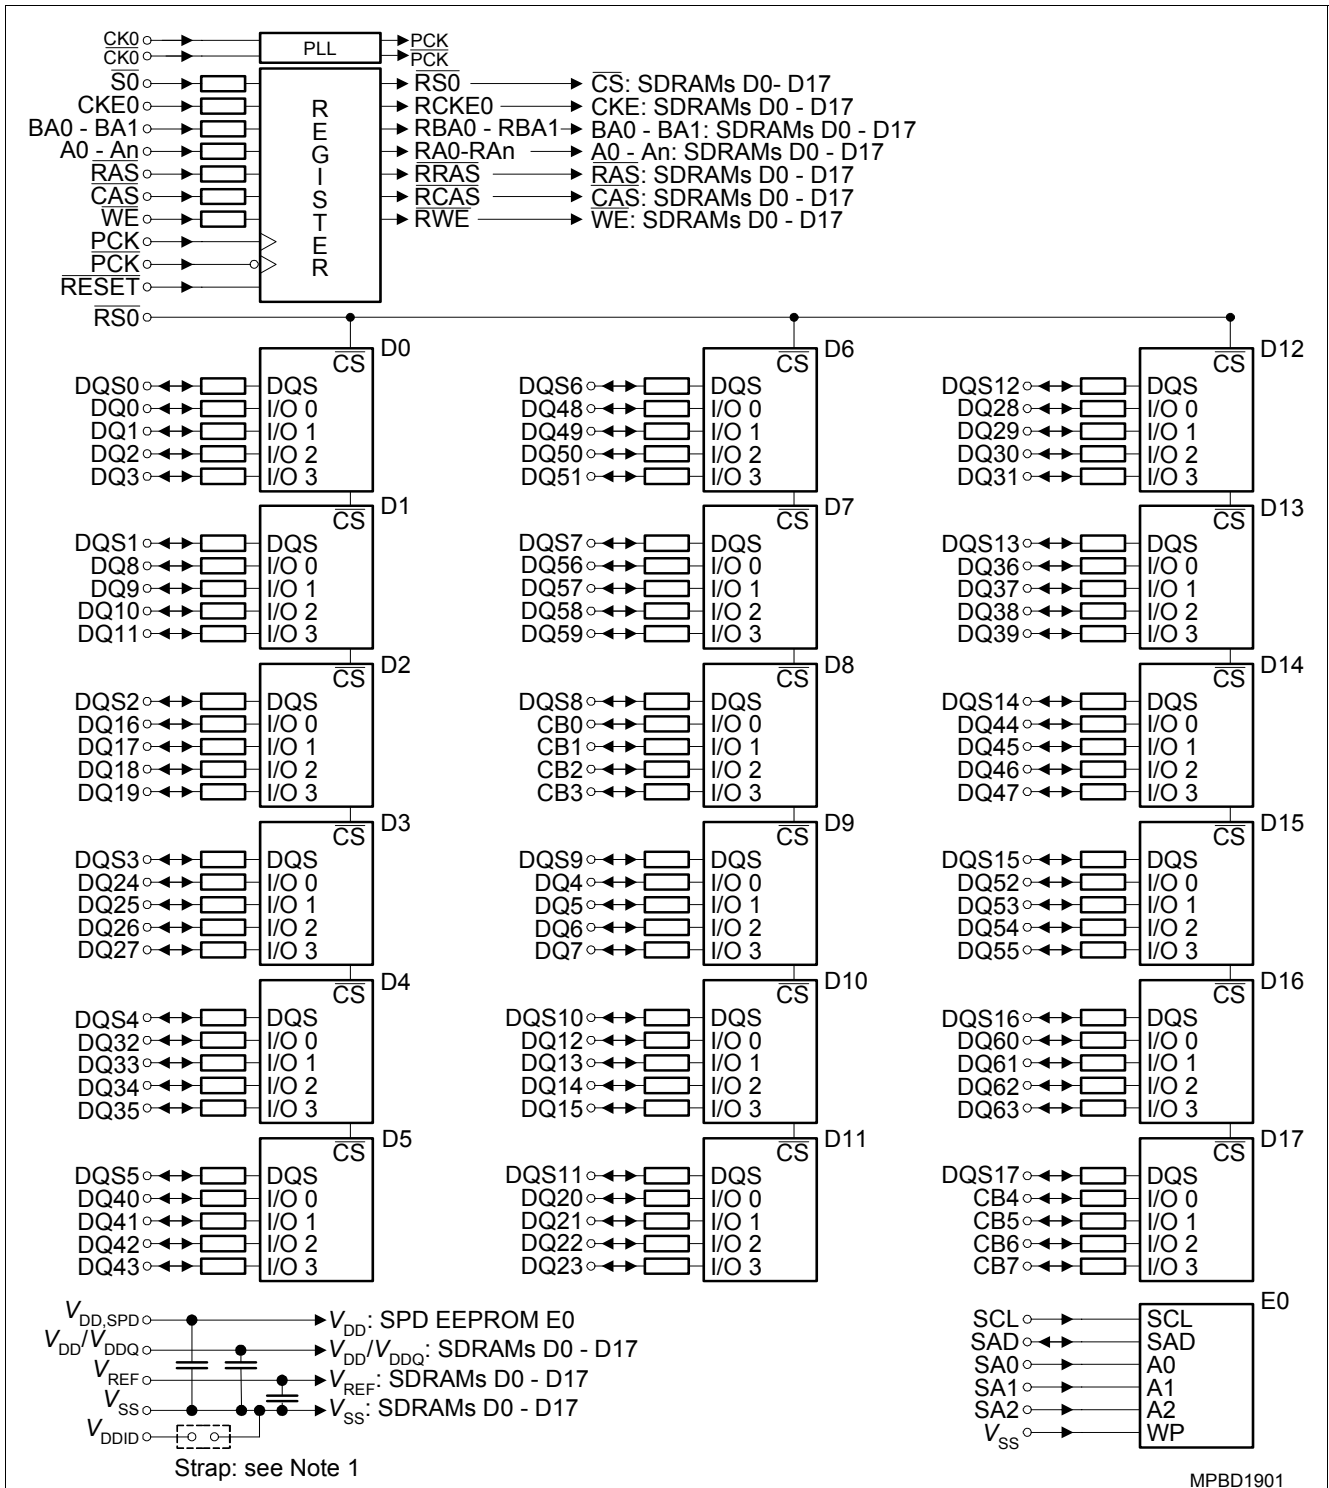


Figure 3 Block Diagram Raw Card M x72, 1 Rank, x4, ECC

Notes

1. $V_{DD} = V_{DDQ}$, therefore V_{DDID} strap open
2. DQ, DQS, DM resistors are 22 ohms $\pm 5\%$

3. $\overline{BA_n}$, $\overline{A_n}$, \overline{RAS} , \overline{CAS} , \overline{WE} resistors are 22 ohms $\pm 5\%$
4. Each Chip Select and CKE pair alternate between decks for thermal enhancement.

3 Electrical Characteristics

3.1 Operating Conditions

Table 7 Absolute Maximum Ratings

Parameter	Symbol	Values			Unit	Note/ Test Condition
		min.	typ.	max.		
Voltage on I/O pins relative to V_{SS}	V_{IN}, V_{OUT}	-0.5	-	$V_{DDQ} + 0.5$	V	-
Voltage on inputs relative to V_{SS}	V_{IN}	-1	-	+3.6	V	-
Voltage on V_{DD} supply relative to V_{SS}	V_{DD}	-1	-	+3.6	V	-
Voltage on V_{DDQ} supply relative to V_{SS}	V_{DDQ}	-1	-	+3.6	V	-
Operating temperature (ambient)	T_A	0	-	+70	°C	-
Storage temperature (plastic)	T_{STG}	-55	-	+150	°C	-
Power dissipation (per SDRAM component)	P_D	-	1	-	W	-
Short circuit output current	I_{OUT}	-	50	-	mA	-

Attention: Permanent damage to the device may occur if “Absolute Maximum Ratings” are exceeded. This is a stress rating only, and functional operation should be restricted to recommended operation conditions. Exposure to absolute maximum rating conditions for extended periods of time may affect device reliability and exceeding only one of the values may cause irreversible damage to the integrated circuit.

Table 8 Electrical Characteristics and DC Operating Conditions

Parameter	Symbol	Values			Unit	Note/Test Condition ¹⁾
		Min.	Typ.	Max.		
Device Supply Voltage	V_{DD}	2.3	2.5	2.7	V	
Output Supply Voltage	V_{DDQ}	2.3	2.5	2.7	V	2)
EEPROM supply voltage	V_{DDSPD}	2.3	2.5	3.6	V	—
Supply Voltage, I/O Supply Voltage	V_{SS}, V_{SSQ}	0		0	V	—
Input Reference Voltage	V_{REF}	$0.49 \times V_{DDQ}$	$0.5 \times V_{DDQ}$	$0.51 \times V_{DDQ}$	V	3)
I/O Termination Voltage (System)	V_{TT}	$V_{REF} - 0.04$		$V_{REF} + 0.04$	V	4)
Input High (Logic1) Voltage	$V_{IH(DC)}$	$V_{REF} + 0.15$		$V_{DDQ} + 0.3$	V	5)
Input Low (Logic0) Voltage	$V_{IL(DC)}$	-0.3		$V_{REF} - 0.15$	V	5)
Input Voltage Level, CK and \overline{CK} Inputs	$V_{IN(DC)}$	-0.3		$V_{DDQ} + 0.3$	V	5)
Input Differential Voltage, CK and \overline{CK} Inputs	$V_{ID(DC)}$	0.36		$V_{DDQ} + 0.6$	V	5)6)
VI-Matching Pull-up Current to Pull-down Current	$V_{I_{Ratio}}$	0.71		1.4	—	7)
Input Leakage Current	I_I	-2		2	μA	Any input $0 V \leq V_{IN} \leq V_{DD}$; All other pins not under test = 0 V ⁸⁾

Electrical Characteristics

Table 8 Electrical Characteristics and DC Operating Conditions (cont'd)

Parameter	Symbol	Values			Unit	Note/Test Condition ¹⁾
		Min.	Typ.	Max.		
Output Leakage Current	I_{OZ}	-5		5	μA	DQs are disabled; $0\text{ V} \leq V_{OUT} \leq V_{DDQ}$ ⁸⁾
Output High Current, Normal Strength Driver	I_{OH}	—		-16.2	mA	$V_{OUT} = 1.95\text{ V}$
Output Low Current, Normal Strength Driver	I_{OL}	16.2		—	mA	$V_{OUT} = 0.35\text{ V}$

- 1) $0\text{ }^\circ\text{C} \leq T_A \leq 70\text{ }^\circ\text{C}$; $V_{DDQ} = 2.5\text{ V} \pm 0.2\text{ V}$, $V_{DD} = +2.5\text{ V} \pm 0.2\text{ V}$;
- 2) Under all conditions, V_{DDQ} must be less than or equal to V_{DD} .
- 3) Peak to peak AC noise on V_{REF} may not exceed $\pm 2\% V_{REF(DC)}$. V_{REF} is also expected to track noise variations in V_{DDQ} .
- 4) V_{TT} is not applied directly to the device. V_{TT} is a system supply for signal termination resistors, is expected to be set equal to V_{REF} , and must track variations in the DC level of V_{REF} .
- 5) Inputs are not recognized as valid until V_{REF} stabilizes.
- 6) V_{ID} is the magnitude of the difference between the input level on CK and the input level on $\overline{\text{CK}}$.
- 7) The ratio of the pull-up current to the pull-down current is specified for the same temperature and voltage, over the entire temperature and voltage range, for device drain to source voltage from 0.25 to 1.0 V. For a given output, it represents the maximum difference between pull-up and pull-down drivers due to process variation.
- 8) Values are shown per pin.

Table 9 I_{DD} Conditions

Parameter	Symbol
Operating Current 0 one bank; active/ precharge; DQ, DM, and DQS inputs changing once per clock cycle; address and control inputs changing once every two clock cycles.	I_{DD0}
Operating Current 1 one bank; active/read/precharge; Burst Length = 4; see component data sheet.	I_{DD1}
Precharge Power-Down Standby Current all banks idle; power-down mode; $\text{CKE} \leq V_{IL,MAX}$	I_{DD2P}
Precharge Floating Standby Current $\overline{\text{CS}} \geq V_{IH,MIN}$; all banks idle; $\text{CKE} \geq V_{IH,MIN}$; address and other control inputs changing once per clock cycle; $V_{IN} = V_{REF}$ for DQ, DQS and DM.	I_{DD2F}
Precharge Quiet Standby Current $\overline{\text{CS}} \geq V_{IH,MIN}$; all banks idle; $\text{CKE} \geq V_{IH,MIN}$; $V_{IN} = V_{REF}$ for DQ, DQS and DM; address and other control inputs stable at $\geq V_{IH,MIN}$ or $\leq V_{IL,MAX}$.	I_{DD2Q}
Active Power-Down Standby Current one bank active; power-down mode; $\text{CKE} \leq V_{IL,MAX}$; $V_{IN} = V_{REF}$ for DQ, DQS and DM.	I_{DD3P}
Active Standby Current one bank active; $\overline{\text{CS}} \geq V_{IH,MIN}$; $\text{CKE} \geq V_{IH,MIN}$; $t_{RC} = t_{RAS,MAX}$; DQ, DM and DQS inputs changing twice per clock cycle; address and control inputs changing once per clock cycle.	I_{DD3N}

Table 9 I_{DD} Conditions (cont'd)

Parameter	Symbol
Operating Current Read one bank active; Burst Length = 2; reads; continuous burst; address and control inputs changing once per clock cycle; 50% of data outputs changing on every clock edge; CL = 2 for DDR266(A), CL = 3 for DDR333 and DDR400B; $I_{OUT} = 0$ mA	I_{DD4R}
Operating Current Write one bank active; Burst Length = 2; writes; continuous burst; address and control inputs changing once per clock cycle; 50% of data outputs changing on every clock edge; CL = 2 for DDR266(A), CL = 3 for DDR333 and DDR400B	I_{DD4W}
Auto-Refresh Current $t_{RC} = t_{RFCMIN}$, burst refresh	I_{DD5}
Self-Refresh Current $CKE \leq 0.2$ V; external clock on	I_{DD6}
Operating Current 7 four bank interleaving with Burst Length = 4; see component data sheet.	I_{DD7}

4 Current Specification and Conditions

Table 10 I_{DD} Specification for HYS72D[16/32][500/501]HR-7-C

Part Number & Organization	HYS72D16500HR-7-C		HYS72D32501HR-7-C		Unit	Notes ¹⁾²⁾
	128MB	256MB	128MB	256MB		
	×72	×72	×72	×72		
	1 Rank	1 Rank	1 Rank	1 Rank		
	-7	-7	-7	-7		
Symbol	Typ.	Max.	Typ.	Max.		
I_{DD0}	1080	1170	1580	1760	mA	³⁾
I_{DD1}	1220	1350	1850	2120	mA	³⁾⁴⁾
I_{DD2P}	400	410	430	450	mA	⁵⁾
I_{DD2F}	590	560	810	740	mA	⁵⁾
I_{DD2Q}	510	570	650	750	mA	⁵⁾
I_{DD3P}	460	490	540	610	mA	⁵⁾
I_{DD3N}	650	740	920	1100	mA	⁵⁾
I_{DD4R}	1220	1350	1850	2120	mA	³⁾⁴⁾
I_{DD4W}	1260	1400	1940	2210	mA	³⁾
I_{DD5}	1490	1850	2390	3110	mA	³⁾
I_{DD6}	400	400	430	430	mA	⁵⁾
I_{DD7}	1850	2120	3110	3650	mA	³⁾⁴⁾

- 1) Test condition for maximum values: $V_{DD} = 2.7\text{ V}$, $T_A = 10\text{ °C}$
- 2) Module I_{DD} is calculated on the basis of component I_{DD} and includes Register an PLL
- 3) The module I_{DD} values are calculated from the component I_{DD} datasheet values are:
 $n * I_{DD} \times [\text{component}]$ for single bank modules (n: number of components per module bank)
 $n * I_{DD} \times [\text{component}] + n * I_{DD3N} [\text{component}]$ for two bank modules (n: number of components per module bank)
- 4) DQ I/O (I_{DDQ}) currents are not included into calculations: module I_{DD} values will be measured differently depending on load conditions
- 5) The module I_{DD} values are calculated from the component I_{DD} datasheet values are:
 $n * I_{DD} \times [\text{component}]$ for single bank modules (n: number of components per module bank)
 $2 * n * I_{DD} \times [\text{component}]$ for two bank modules (n: number of components per module bank)

4.1 AC Characteristics

Table 11 AC Timing - Absolute Specifications for PC2100

Parameter	Symbol	-7		Unit	Note/ Test Condition ¹⁾
		DDR266A			
		Min.	Max.		
DQ output access time from CK/ $\overline{\text{CK}}$	t_{AC}	-0.75	+0.75	ns	2)3)4)5)
DQS output access time from CK/ $\overline{\text{CK}}$	t_{DQSCK}	-0.75	+0.75	ns	2)3)4)5)
CK high-level width	t_{CH}	0.45	0.55	t_{CK}	2)3)4)5)
CK low-level width	t_{CL}	0.45	0.55	t_{CK}	2)3)4)5)
Clock Half Period	t_{HP}	min. (t_{CL} , t_{CH})		ns	2)3)4)5)
Clock cycle time	$t_{CK2.5}$	7.5	12	ns	CL = 2.5 2)3)4)5)
	t_{CK2}	7.5	12	ns	CL = 2.0 2)3)4)5)
	$t_{CK1.5}$	—	—	ns	CL = 1.5 2)3)4)5)
DQ and DM input hold time	t_{DH}	0.5	—	ns	2)3)4)5)
DQ and DM input setup time	t_{DS}	0.5	—	ns	2)3)4)5)
Control and Addr. input pulse width (each input)	t_{IPW}	2.2	—	ns	2)3)4)5)6)
DQ and DM input pulse width (each input)	t_{DIPW}	1.75	—	ns	2)3)4)5)6)
Data-out high-impedance time from CK/ $\overline{\text{CK}}$	t_{HZ}	—	+0.75	ns	2)3)4)5)7)
Data-out low-impedance time from CK/ $\overline{\text{CK}}$	t_{LZ}	-0.75	+0.75	ns	2)3)4)5)7)
Write command to 1 st DQS latching transition	t_{DQSS}	0.75	1.25	t_{CK}	2)3)4)5)
DQS-DQ skew (DQS and associated DQ signals)	t_{DQSQ}	—	+0.5	ns	TSOPII ²⁾³⁾⁴⁾⁵⁾
Data hold skew factor	t_{QHS}	—	0.75	ns	TSOPII ²⁾³⁾⁴⁾⁵⁾
DQ/DQS output hold time	t_{QH}	$t_{HP} - t_{QHS}$	—	ns	2)3)4)5)
DQS input low (high) pulse width (write cycle)	$t_{DQSL,H}$	0.35	—	t_{CK}	2)3)4)5)
DQS falling edge to CK setup time (write cycle)	t_{DSS}	0.2	—	t_{CK}	2)3)4)5)
DQS falling edge hold time from CK (write cycle)	t_{DSH}	0.2	—	t_{CK}	2)3)4)5)
Mode register set command cycle time	t_{MRD}	2	—	t_{CK}	2)3)4)5)
Write preamble setup time	t_{WPRES}	0	—	ns	2)3)4)5)8)
Write postamble	t_{WPST}	0.40	0.60	t_{CK}	2)3)4)5)9)
Write preamble	t_{WPRE}	0.25	—	t_{CK}	2)3)4)5)
Address and control input setup time	t_{IS}	0.9	—	ns	fast slew rate 3)4)5)6)10)
		1.0	—	ns	slow slew rate 3)4)5)6)10)
Address and control input hold time	t_{IH}	0.9	—	ns	fast slew rate 3)4)5)6)10)
		1.0	—	ns	slow slew rate 3)4)5)6)10)
Read preamble	t_{RPRE}	0.9	1.1	t_{CK}	CL > 1.5 2)3)4)5)
		$t_{RPRE1.5}$	NA	t_{CK}	CL = 1.5 2)3)4)5)11)
Read preamble setup time	t_{RPRES}	NA	—	ns	2)3)4)5)12)
Read postamble	t_{RPST}	0.40	0.60	t_{CK}	2)3)4)5)

Table 11 AC Timing - Absolute Specifications for PC2100 (cont'd)

Parameter	Symbol	-7		Unit	Note/ Test Condition ¹⁾
		DDR266A			
		Min.	Max.		
Active to Precharge command	t_{RAS}	45	120E+3	ns	2)3)4)5)
Active to Active/Auto-refresh command period	t_{RC}	65	—	ns	2)3)4)5)
Auto-refresh to Active/Auto-refresh command period	t_{RFC}	75	—	ns	2)3)4)5)
Active to Read or Write delay	t_{RCD}	20	—	ns	2)3)4)5)
Precharge command period	t_{RP}	20	—	ns	2)3)4)5)
Active to Autoprecharge delay	t_{RAP}	t_{RCD} or t_{RASmin}		ns	2)3)4)5)
Active bank A to Active bank B command	t_{RRD}	15	—	ns	2)3)4)5)
Write recovery time	t_{WR}	15	—	ns	2)3)4)5)
Auto precharge write recovery + precharge time	t_{DAL}			t_{CK}	2)3)4)5)13)
Internal write to read command delay	t_{WTR}	1	—	t_{CK}	CL > 1.5 ²⁾³⁾⁴⁾⁵⁾
	$t_{WTR1.5}$	—	—	t_{CK}	CL = 1.5 ²⁾³⁾⁴⁾⁵⁾
Exit self-refresh to non-read command	t_{XSNR}	75	—	ns	2)3)4)5)
Exit self-refresh to read command	t_{XSRD}	200	—	t_{CK}	2)3)4)5)
Average Periodic Refresh Interval	t_{REFI}	—	15.6	μ S	2)3)4)5)14)

- 1) $0\text{ }^{\circ}\text{C} \leq T_A \leq 70\text{ }^{\circ}\text{C}$; $V_{DDQ} = 2.5\text{ V} \pm 0.2\text{ V}$, $V_{DD} = +2.5\text{ V} \pm 0.2\text{ V}$
- 2) Input slew rate $\geq 1\text{ V/ns}$ for DDR400, DDR333, DDR266, and $= 1\text{ V/ns}$ for DDR200
- 3) The CK/ $\overline{\text{CK}}$ input reference level (for timing reference to CK/ $\overline{\text{CK}}$) is the point at which CK and $\overline{\text{CK}}$ cross: the input reference level for signals other than CK/ $\overline{\text{CK}}$, is V_{REF} . CK/ $\overline{\text{CK}}$ slew rate are $\geq 1.0\text{ V/ns}$.
- 4) Inputs are not recognized as valid until V_{REF} stabilizes.
- 5) The Output timing reference level, as measured at the timing reference point indicated in AC Characteristics (note 3) is V_{TT} .
- 6) These parameters guarantee device timing, but they are not necessarily tested on each device.
- 7) t_{HZ} and t_{LZ} transitions occur in the same access time windows as valid data transitions. These parameters are not referred to a specific voltage level, but specify when the device is no longer driving (HZ), or begins driving (LZ).
- 8) The specific requirement is that DQS be valid (HIGH, LOW, or some point on a valid transition) on or before this CK edge. A valid transition is defined as monotonic and meeting the input slew rate specifications of the device. When no writes were previously in progress on the bus, DQS will be transitioning from Hi-Z to logic LOW. If a previous write was in progress, DQS could be HIGH, LOW, or transitioning from HIGH to LOW at this time, depending on t_{DQSS} .
- 9) The maximum limit for this parameter is not a device limit. The device operates with a greater value for this parameter, but system performance (bus turnaround) degrades accordingly.
- 10) Fast slew rate $\geq 1.0\text{ V/ns}$, slow slew rate $\geq 0.5\text{ V/ns}$ and $< 1\text{ V/ns}$ for command/address and CK & $\overline{\text{CK}}$ slew rate $> 1.0\text{ V/ns}$, measured between $V_{IH(ac)}$ and $V_{IL(ac)}$.
- 11) CAS Latency 1.5 operation is supported on DDR200 devices only
- 12) t_{RPRES} is defined for CL = 1.5 operation only
- 13) For each of the terms, if not already an integer, round to the next highest integer. t_{CK} is equal to the actual system clock cycle time.
- 14) A maximum of eight Autorefresh commands can be posted to any given DDR SDRAM device.

5 SPD Contents

Table 12 SPD Codes for HYS72D[16/32][500/501]HR-7-C

	Part Number & Organization	HYS72D16500HR-7-C	HYS72D32501HR-7-C
		128 MB	256 MB
		×72	×72
		1 Rank	1 Rank
		Label Code	PC2100R-20331
Jedec SPD Revision	Rev. 1.0	Rev. 1.0	
Byte#	Description	HEX	HEX
0	Programmed SPD Bytes in E2PROM	80	80
1	Total number of Bytes in E2PROM	08	08
2	Memory Type (DDR = 07h)	07	07
3	Number of Row Addresses	0C	0C
4	Number of Column Addresses	0A	0B
5	Number of DIMM Ranks	01	01
6	Data Width (LSB)	48	48
7	Data Width (MSB)	00	00
8	Interface Voltage Levels	04	04
9	tCK @ CLmax (Byte 18) [ns]	70	70
10	tAC SDRAM @ CLmax (Byte 18) [ns]	75	75
11	Error Correction Support (non- / ECC)	02	02
12	Refresh Rate	80	80
13	Primary SDRAM Width	08	04
14	Error Checking SDRAM Width	08	04
15	tCCD [cycles]	01	01
16	Burst Length Supported	0E	0E
17	Number of Banks on SDRAM Device	04	04
18	CAS Latency	0C	0C
19	CS Latency	01	01
20	Write Latency	02	02
21	DIMM Attributes	26	26
22	Component Attributes	C1	C1
23	tCK @ CLmax -0.5 (Byte 18) [ns]	75	75
24	tAC SDRAM @ CLmax -0.5 [ns]	75	75
25	tCK @ CLmax -1 (Byte 18) [ns]	00	00
26	tAC SDRAM @ CLmax -1 [ns]	00	00
27	tRPmin [ns]	50	50
28	tRRDmin [ns]	3C	3C
29	tRCDmin [ns]	50	50
30	tRASmin [ns]	2D	2D
31	Module Density per Bank	20	40
32	tAS, tCS [ns]	90	90

Table 12 SPD Codes for HYS72D[16/32][500/501]HR-7-C

	Part Number & Organization	HYS72D16500HR-7-C	HYS72D32501HR-7-C
		128 MB	256 MB
		×72	×72
		1 Rank	1 Rank
	Label Code	PC2100R-20331	PC2100R-20331
	Jedec SPD Revision	Rev. 1.0	Rev. 1.0
Byte#	Description	HEX	HEX
33	tAH, TCH [ns]	90	90
34	tDS [ns]	50	50
35	tDH [ns]	50	50
36 – 40	not used	00	00
41	tRCmin [ns]	41	41
42	tRFCmin [ns]	4B	4B
43	tCKmax [ns]	30	30
44	tDQSQmax [ns]	32	32
45	tQHSmax [ns]	75	75
46	not used	00	00
47	DIMM PCB Height	01	01
48 – 61	not used	00	00
62	SPD Revision	10	10
63	Checksum of Byte 0-62	B9	D2
64	JEDEC ID Code of Infineon (1)	C1	C1
65 – 71	JEDEC ID Code of Infineon (2 - 8)	00	00
72	Module Manufacturer Location	xx	xx
73	Part Number, Char 1	37	37
74	Part Number, Char 2	32	32
75	Part Number, Char 3	44	44
76	Part Number, Char 4	31	33
77	Part Number, Char 5	36	32
78	Part Number, Char 6	35	35
79	Part Number, Char 7	30	30
80	Part Number, Char 8	30	31
81	Part Number, Char 9	48	48
82	Part Number, Char 10	52	52
83	Part Number, Char 11	37	37
84	Part Number, Char 12	43	43
85	Part Number, Char 13	20	20
86	Part Number, Char 14	20	20
87	Part Number, Char 15	20	20
88	Part Number, Char 16	20	20
89	Part Number, Char 17	20	20
90	Part Number, Char 18	20	20

Table 12 SPD Codes for HYS72D[16/32][500/501]HR-7-C

	Part Number & Organization	HYS72D16500HR-7-C	HYS72D32501HR-7-C
		128 MB	256 MB
		×72	×72
		1 Rank	1 Rank
	Label Code	PC2100R-20331	PC2100R-20331
Jedec SPD Revision	Rev. 1.0	Rev. 1.0	
Byte#	Description	HEX	HEX
91	Module Revision Code	xx	xx
92	Test Program Revision Code	xx	xx
93	Module Manufacturing Date Year	xx	xx
94	Module Manufacturing Date Week	xx	xx
95 – 98	Module Serial Number (1 - 4)	xx	xx
99 – 127	not used	00	00

6 Package Outlines

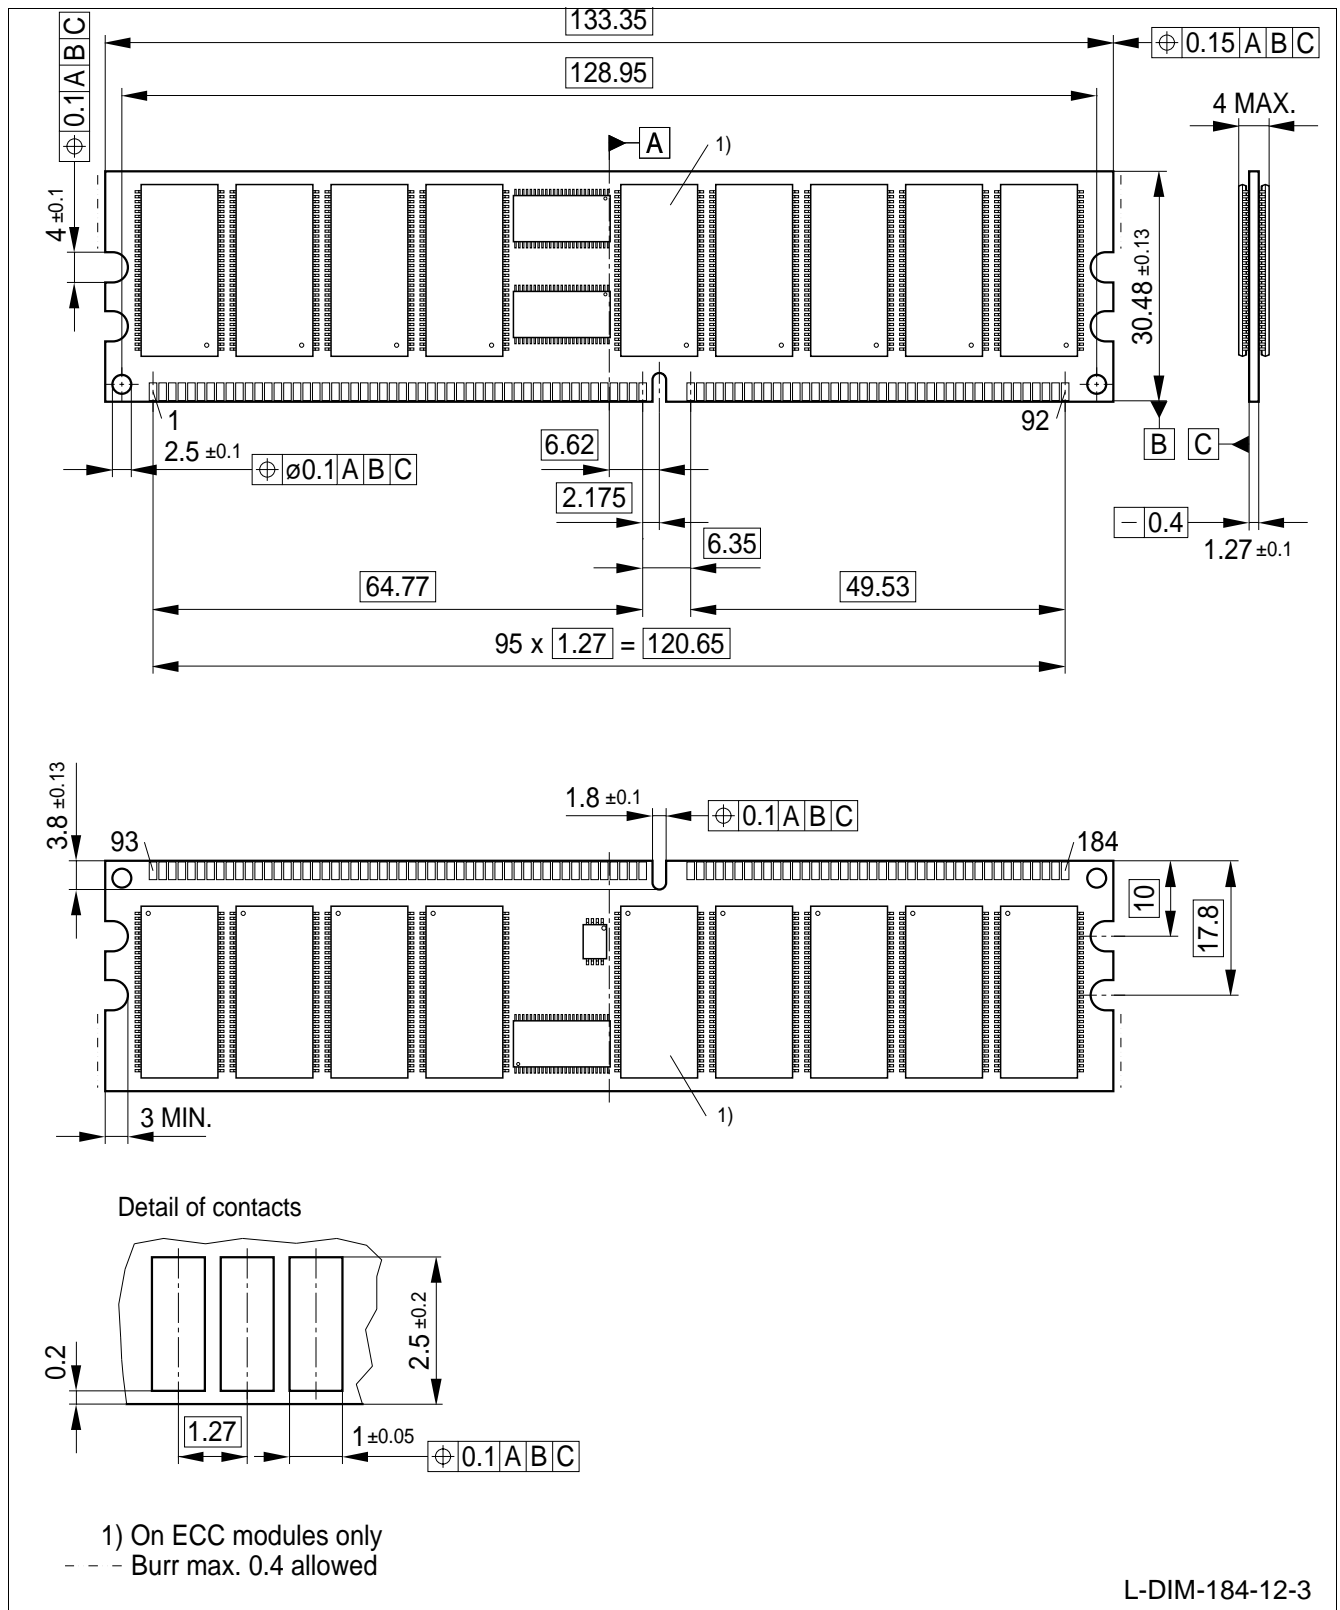


Figure 4 Package Outlines: Raw Card M HYS72D32501HR-7-C

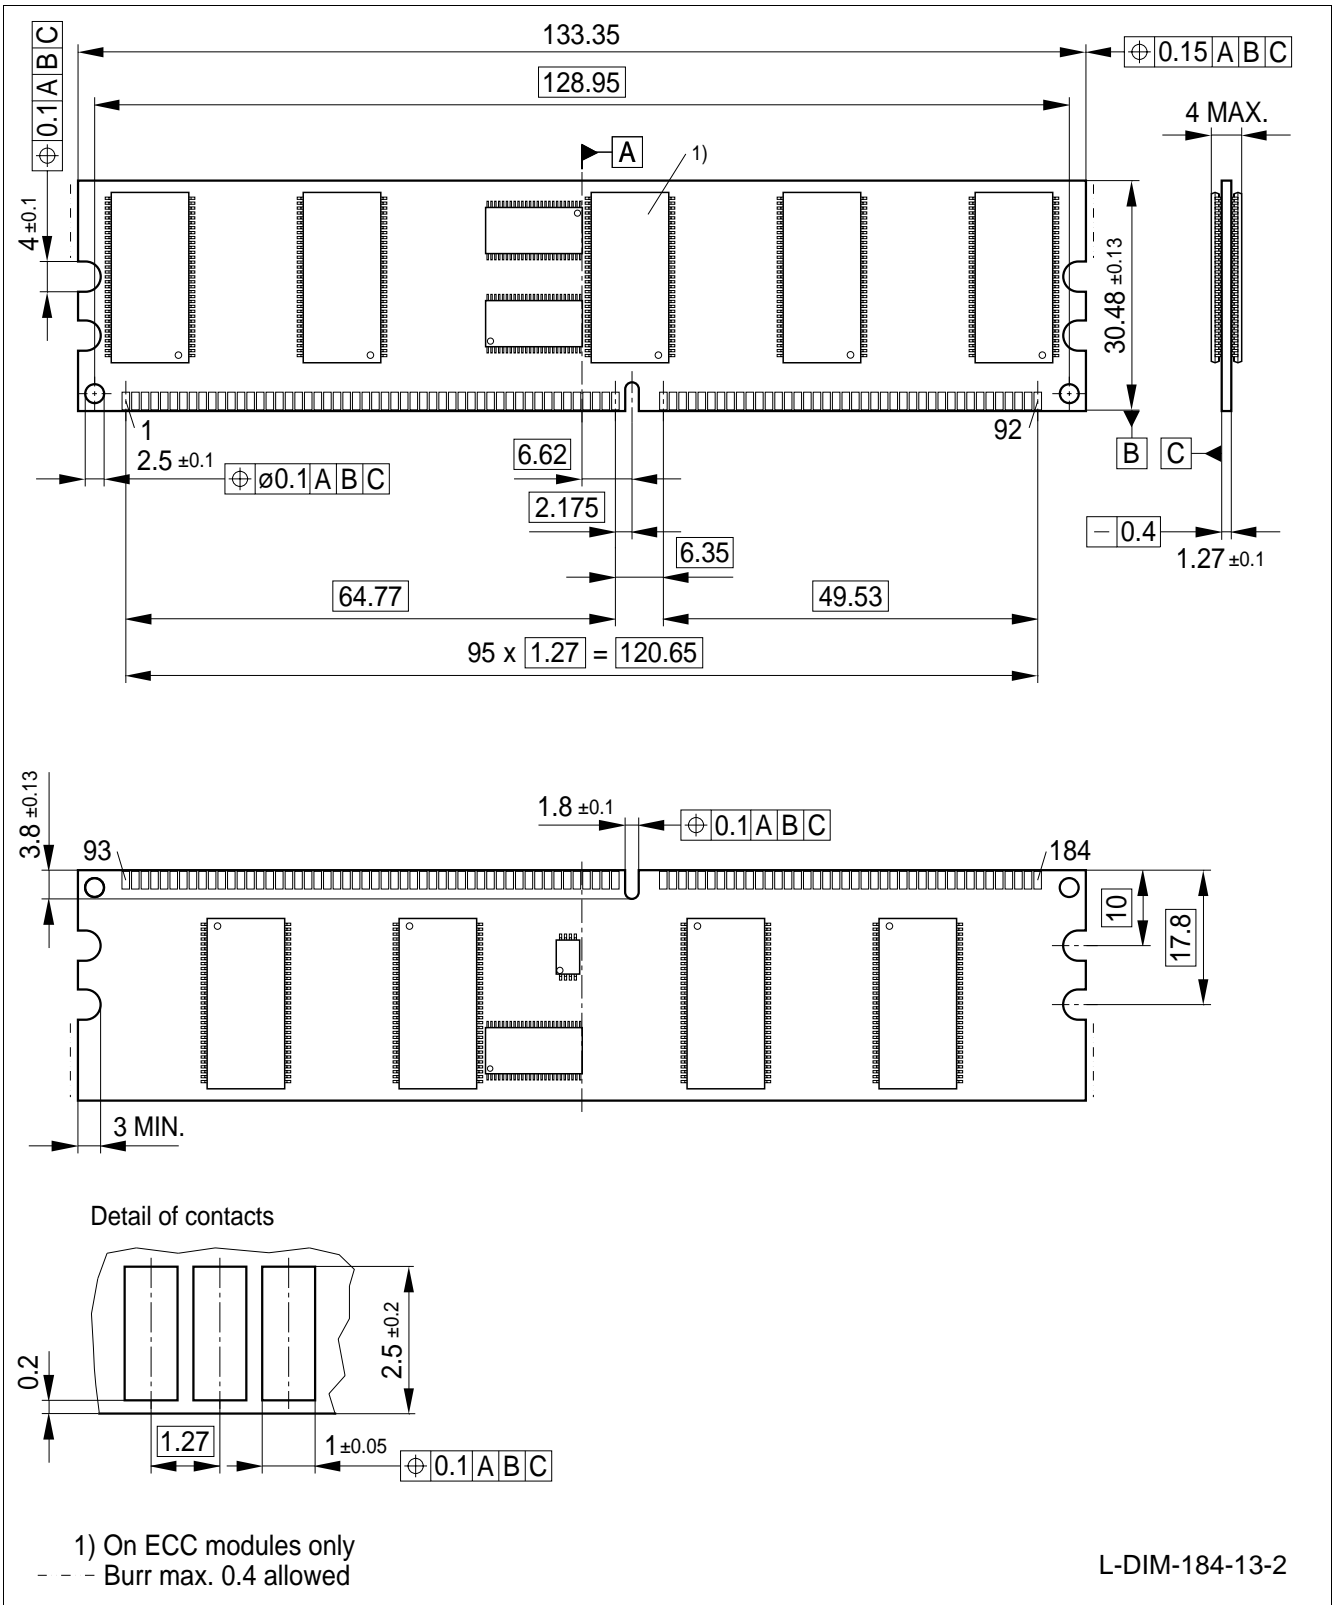


Figure 5 Package Outline: Raw Card L HYS72D16500HR-7-C

7 Application Note

Power Up and Power Management on DDR Registered DIMMs (according to JEDEC ballot JC-42.5 Item 1173)

184-pin Double Data Rate (DDR) Registered DIMMs include two new features to facilitate controlled power-up and to minimize power consumption during low power mode. One feature is externally controlled via a system-generated RESET signal; the second is based on module detection of the input clocks. These enhancements permit the modules to power up with SDRAM outputs in a High-Z state (eliminating risk of high current dissipations and/or dotted I/Os), and result in the powering-down of module support devices (registers and Phase-Locked Loop) when the memory is in Self-Refresh mode.

The new RESET pin controls power dissipation on the module's registers and ensures that CKE and other SDRAM inputs are maintained at a valid 'low' level during power-up and self refresh. When RESET is at a low level, all the register outputs are forced to a low level, and all differential register input receivers are powered down, resulting in very low register power consumption. The $\overline{\text{RESET}}$ pin, located on DIMM tab #10, is driven from the system as an asynchronous signal according to the attached details. Using this function also permits the system and DIMM clocks to be stopped during memory Self Refresh operation, while ensuring that the SDRAMs stay in Self Refresh mode.

Table 13 $\overline{\text{RESET}}$ Truth Table

Register Inputs				Register Outputs
$\overline{\text{RESET}}$	CK	$\overline{\text{CK}}$	Data in (D)	Data out (Q)
H	Rising	Falling	H	H
H	Rising	Falling	L	L
H	L or H	L or H	X	Qo
H	High Z	High Z	X	Illegal input conditions
L	X or Hi-Z	X or Hi-Z	X or Hi-Z	L

X: Don't care, Hi-Z: High Impedance, Qo: Data latched at the previous of CK rising and $\overline{\text{CK}}$ falling

As described in the table above, a low on the $\overline{\text{RESET}}$ input ensures that the Clock Enable (CKE) signal(s) are maintained low at the SDRAM pins (CKE being one of the 'Q' signals at the register output). Holding CKE low maintains a high impedance state on the SDRAM DQ, DQS and DM outputs — where they will remain until activated by a valid 'read' cycle. CKE low also maintains SDRAMs in Self Refresh mode when applicable.

The DDR PLL devices automatically detect clock activity above 20MHz. When an input clock frequency of 20MHz or greater is detected, the PLL begins operation and initiates clock frequency lock (the minimum operating frequency at which all specifications will be met is 95MHz). If the clock input frequency drops below 20MHz (actual detect frequency will vary by vendor), the PLL VCO (Voltage Controlled Oscillator) is stopped, outputs are made High-Z, and the differential inputs are powered down — resulting in a total PLL current consumption of less than 1mA. Use of this low power PLL function makes the use of the PLL $\overline{\text{RESET}}$ (or $\overline{\text{G}}$ pin) unnecessary, and it is tied inactive on the DIMM.

This application note describes the required and optional system sequences associated with the DDR Registered DIMM 'RESET' function. It is important to note that all references to CKE refer to both CKE0 and CKE1 for a 2-bank DIMM. Because RESET applies to all DIMM register devices, it is therefore not possible to uniquely control CKE to one physical DIMM bank through the use of the RESET pin.

Power-Up Sequence with $\overline{\text{RESET}}$ — Required

1. The system sets $\overline{\text{RESET}}$ at a valid low level.
This is the preferred default state during power-up. This input condition forces all register outputs to a low state independent of the condition on the register inputs (data and clock), ensuring that CKE is at a stable low-level at the DDR SDRAMs.
2. The power supplies should be initialized according to the JEDEC-approved initialization sequence for DDR SDRAMs.
3. Stabilization of Clocks to the SDRAM
The system must drive clocks to the application frequency (PLL operation is not assured until the input clock reaches 20 MHz). Stability of clocks at the SDRAMs will be affected by all applicable system clock devices, and time must be allotted to permit all clock devices to settle. Once a stable clock is received at the DIMM PLL, the required PLL stabilization time (assuming power to the DIMM is stable) is 100 microseconds. When a stable clock is present at the SDRAM input (driven from the PLL), the DDR SDRAM requires 200 μsec prior to SDRAM operation.
4. The system applies valid logic levels to the data inputs of the register (address and controls at the DIMM connector).
CKE must be maintained low and all other inputs should be driven to a known state. In general these commands can be determined by the system designer. One option is to apply an SDRAM 'NOP' command (with CKE low), as this is the first command defined by the JEDEC initialization sequence (ideally this would be a 'NOP Deselect' command). A second option is to apply low levels on all of the register inputs to be consistent with the state of the register outputs.
5. The system switches $\overline{\text{RESET}}$ to a logic 'high' level.
The SDRAM is now functional and prepared to receive commands. Since the $\overline{\text{RESET}}$ signal is asynchronous, setting the $\overline{\text{RESET}}$ timing in relation to a specific clock edge is not required (during this period, register inputs must remain stable).
6. The system must maintain stable register inputs until normal register operation is attained.
The registers have an activation time that allows their clock receivers, data input receivers, and output drivers sufficient time to be turned on and become stable. During this time the system must maintain the valid logic levels described in step 5. It is also a functional requirement that the registers maintain a low state at the CKE outputs to guarantee that the DDR SDRAMs continue to receive a low level on CKE. Register activation time ($t(\text{ACT})$), from asynchronous switching of $\overline{\text{RESET}}$ from low to high until the registers are stable and ready to accept an input signal, is specified in the register and DIMM documentation.
7. The system can begin the JEDEC-defined DDR SDRAM power-up sequence (according to the JEDEC-approved initialization sequence).

Self Refresh Entry ($\overline{\text{RESET}}$ low, clocks powered off) — Optional

Self Refresh can be used to retain data in DDR SDRAM DIMMs even if the rest of the system is powered down and the clocks are off. This mode allows the DDR SDRAMs on the DIMM to retain data without external clocking. Self Refresh mode is an ideal time to utilize the $\overline{\text{RESET}}$ pin, as this can reduce register power consumption ($\overline{\text{RESET}}$ low deactivates register CK and CK, data input receivers, and data output drivers).

1. The system applies Self Refresh entry command.
(CKE \rightarrow Low, $\overline{\text{CS}}$ \rightarrow Low, $\overline{\text{RAS}}$ \rightarrow Low, $\overline{\text{CAS}}$ \rightarrow Low, $\overline{\text{WE}}$ \rightarrow High)

Note: Note: The commands reach the DDR SDRAM one clock later due to the additional register pipelining on a Registered DIMM. After this command is issued to the SDRAM, all of the address and control and clock input conditions to the SDRAM are Don't Cares— with the exception of CKE.

2. The system sets $\overline{\text{RESET}}$ at a valid low level.
This input condition forces all register outputs to a low state, independent of the condition on the register inputs (data and clock), and ensures that CKE, and all other control and address signals, are a stable low-level at the DDR SDRAMs. Since the $\overline{\text{RESET}}$ signal is asynchronous, setting the $\overline{\text{RESET}}$ timing in relation to a specific clock edge is not required.
3. The system turns off clock inputs to the DIMM. (Optional)
 - a. In order to reduce DIMM PLL current, the clock inputs to the DIMM are turned off, resulting in High-Z clock

inputs to both the SDRAMs and the registers. This must be done after the $\overline{\text{RESET}}$ deactivate time of the register ($t(\text{INACT})$). The deactivate time defines the time in which the clocks and the control and address signals must maintain valid levels after $\overline{\text{RESET}}$ low has been applied and is specified in the register and DIMM documentation.

b. The system may release DIMM address and control inputs to High-Z.

This can be done after the $\overline{\text{RESET}}$ deactivate time of the register. The deactivate time defines the time in which the clocks and the control and the address signals must maintain valid levels after $\overline{\text{RESET}}$ low has been applied. It is highly recommended that CKE continue to remain low during this operation.

- The DIMM is in lowest power Self Refresh mode.

Self Refresh Exit ($\overline{\text{RESET}}$ low, clocks powered off) — Optional

- Stabilization of Clocks to the SDRAM.

The system must drive clocks to the application frequency (PLL operation is not assured until the input clock reaches ~20MHz). Stability of clocks at the SDRAMs will be affected by all applicable system clock devices, and time must be allotted to permit all clock devices to settle. Once a stable clock is received at the DIMM PLL, the required PLL stabilization time (assuming power to the DIMM is stable) is 100 microseconds.

- The system applies valid logic levels to the data inputs of the register (address and controls at the DIMM connector).

CKE must be maintained low and all other inputs should be driven to a known state. In general these commands can be determined by the system designer. One option is to apply an SDRAM 'NOP' command (with CKE low), as this is the first command defined by the JEDEC Self Refresh Exit sequence (ideally this would be a 'NOP Deselect' command). A second option is to apply low levels on all of the register inputs, to be consistent with the state of the register outputs.

- The system switches $\overline{\text{RESET}}$ to a logic 'high' level.

The SDRAM is now functional and prepared to receive commands. Since the $\overline{\text{RESET}}$ signal is asynchronous, $\overline{\text{RESET}}$ timing relationship to a specific clock edge is not required (during this period, register inputs must remain stable).

- The system must maintain stable register inputs until normal register operation is attained.

The registers have an activation time that allows the clock receivers, input receivers, and output drivers sufficient time to be turned on and become stable. During this time the system must maintain the valid logic levels described in Step 2. It is also a functional requirement that the registers maintain a low state at the CKE outputs to guarantee that the DDR SDRAMs continue to receive a low level on CKE. Register activation time ($t(\text{ACT})$), from asynchronous switching of $\overline{\text{RESET}}$ from low to high until the registers are stable and ready to accept an input signal, is specified in the register and DIMM do-umentation.

- System can begin the JEDEC-defined DDR SDRAM Self Refresh Exit Procedure.

Self Refresh Entry ($\overline{\text{RESET}}$ low, clocks running) — Optional

Although keeping the clocks running increases power consumption from the on-DIMM PLL during self refresh, this is an alternate operating mode for these DIMMs.

1. System enters Self Refresh entry command.
(CKE → Low, $\overline{\text{CS}}$ → Low, $\overline{\text{RAS}}$ → Low, $\overline{\text{CAS}}$ → Low, $\overline{\text{WE}}$ → High)

Note: Note: The commands reach the DDR SDRAM one clock later due to the additional register pipelining on a Registered DIMM. After this command is issued to the SDRAM, all of the address and control and clock input conditions to the SDRAM are Don't Cares — with the exception of CKE.

- The system sets $\overline{\text{RESET}}$ at a valid low level.

This input condition forces all register outputs to a low state, independent of the condition on the data and clock register inputs, and ensures that CKE is a stable low-level at the DDR SDRAMs.

- The system may release DIMM address and control inputs to High-Z.

This can be done after the $\overline{\text{RESET}}$ deactivate time of the register ($t(\text{INACT})$). The deactivate time describes the time in which the clocks and the control and the address signals must maintain valid levels after $\overline{\text{RESET}}$ low has been applied. It is highly recommended that CKE continue to remain low during the operation.

- The DIMM is in a low power, Self Refresh mode.

Self Refresh Exit ($\overline{\text{RESET}}$ low, clocks running) — Optional

1. The system applies valid logic levels to the data inputs of the register (address and controls at the DIMM connector). CKE must be maintained low and all other inputs should be driven to a known state. In general these commands can be determined by the system designer. One option is to apply an SDRAM 'NOP' command (with CKE low), as this is the first command defined by the Self Refresh Exit sequence (ideally this would be a 'NOP Deselect' command). A second option is to apply low levels on all of the register inputs to be consistent with the state of the register outputs.
2. The system switches $\overline{\text{RESET}}$ to a logic 'high' level.
The SDRAM is now functional and prepared to receive commands. Since the $\overline{\text{RESET}}$ signal is asynchronous, it does not need to be tied to a particular clock edge (during this period, register inputs must continue to remain stable).
3. The system must maintain stable register inputs until normal register operation is attained.
The registers have an activation time that allows the clock receivers, input receivers, and output drivers sufficient time to be turned on and become stable. During this time the system must maintain the valid logic levels described in Step 1. It is also a functional requirement that the registers maintain a low state at the CKE outputs in order to guarantee that the DDR SDRAMs continue to receive a low level on CKE. This activation time, from asynchronous switching of $\overline{\text{RESET}}$ from low to high, until the registers are stable and ready to accept an input signal, is $t(\text{ACT})$ as specified in the register and DIMM documentation.
4. The system can begin JEDEC defined DDR SDRAM Self Refresh Exit Procedure.

Self Refresh Entry/Exit ($\overline{\text{RESET}}$ high, clocks running) — Optional

As this sequence does not involve the use of the $\overline{\text{RESET}}$ function, the JEDEC standard SDRAM specification explains in detail the method for entering and exiting Self Refresh for this case.

Self Refresh Entry ($\overline{\text{RESET}}$ high, clocks powered off) — Not Permissible

In order to maintain a valid low level on the register output, it is required that either the clocks be running and the system drive a low level on CKE, or the clocks are powered off and $\overline{\text{RESET}}$ is asserted low according to the sequence defined in this application note. In the case where $\overline{\text{RESET}}$ remains high and the clocks are powered off, the PLL drives a High-Z clock input into the register clock input. Without the low level on $\overline{\text{RESET}}$ an unknown DIMM state will result.

www.infineon.com

Published by Infineon Technologies AG