

# PQ05TZ51/PQ05TZ11 Series

Low Power-Loss Voltage Regulators with OFF-state Low Dissipation Current

## ■ Features


- Low power-loss (Dropout voltage : MAX 0.5V)
- Surface mount type package (Equivalent to EIAJ SC-63)
- Both the 0.5A output PQ05TZ51 series and the 1A output PQ05TZ11 series have high-precision output ( $\pm 2.5\%$ )
- Low dissipation current at OFF-state (Iqs:MAX.5 $\mu$ A)
- Built-in ON/OFF control function

## ■ Model Line-ups


	Output voltage	5V Output	9V Output	12V Output
0.5A Output	Output voltage precision: $\pm 2.5\%$	PQ05TZ51	PQ09TZ51	PQ12TZ51
1.0A Output	Output voltage precision: $\pm 2.5\%$	PQ05TZ11	PQ09TZ11	PQ12TZ11

## ■ Outline Dimensions

(Unit : mm)

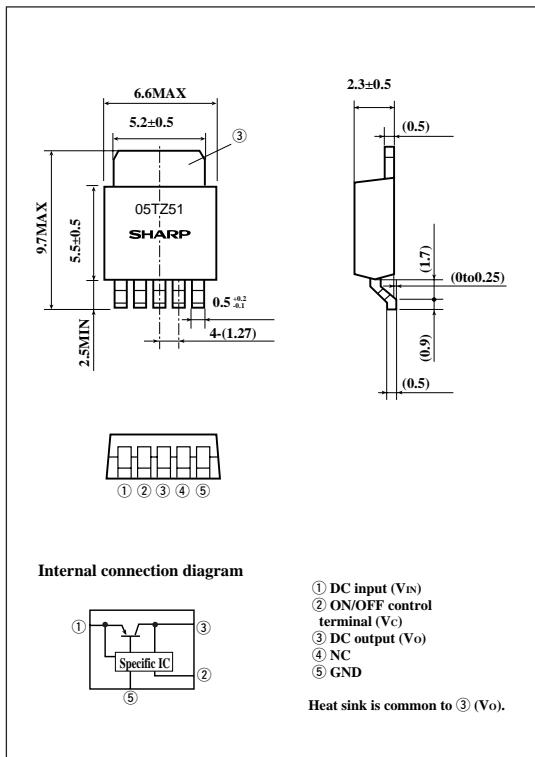

Internal connection diagram



- ① DC input (V<sub>IN</sub>)
- ② ON/OFF control terminal (V<sub>C</sub>)
- ③ DC output (V<sub>O</sub>)
- ④ NC
- ⑤ GND

Heat sink is common to ③ (V<sub>O</sub>).

## ■ Absolute Maximum Ratings

(xx=05,09,12, T<sub>a</sub>=25°C)

Parameter	Symbol	Rating		Unit
		PQxxTZ51 PQxxTZ11		
* <sup>1</sup> Input voltage	V <sub>IN</sub>	24		V
* <sup>1</sup> Output control voltage	V <sub>C</sub>	24		V
Output current	I <sub>O</sub>	0.5	1.0	A
* <sup>2</sup> Power dissipation	P <sub>D</sub>	8		W
* <sup>3</sup> Junction temperature	T <sub>j</sub>	150		°C
Operating temperature	T <sub>opr</sub>	-20 to +80		°C
Storage temperature	T <sub>stg</sub>	-40 to +150		°C
Soldering temperature	T <sub>sol</sub>	260 (For 10s)		°C

\*<sup>1</sup> All are open except GND and applicable terminals.

\*<sup>2</sup> With infinite heat sink.

\*<sup>3</sup> Overheat protection may operate at 125°C=<T<sub>j</sub><=150°C

Please refer to the chapter "Handling Precautions".

## ■ Electrical Characteristics

(Unless otherwise specified,  $V_C=2.7V$ ,  $T_a=25^\circ C$ )

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	PQ05TZ51/11	$V_O$ *3,*7	4.88	5.0	5.12	V
	PQ09TZ51/11		8.78	9.0	9.22	
	PQ12TZ51/11		11.7	12.0	12.3	
Load regulation	$R_{regL}$	*3,*4	-	0.2	2.0	%
Line regulation	$R_{regI}$	$I_o=5mA$ , *8	-	0.1	2.5	%
Temperature coefficient of output voltage	$T_{CVo}$	*3, $I_o=5mA$ , $T_j=0$ to $125^\circ C$	-	$\pm 0.01$	-	%/°C
Ripple rejection	$RR$	Refer to Fig. 2	45	60	-	dB
Dropout voltage	$V_{i\cdot o}$	*7,*5	-	0.2	0.5	V
ON-state voltage for control	$V_C(ON)$	*3,*6,*7	2.0	-	-	V
ON-state current for control	$I_C(ON)$	*3,*7	-	-	200	$\mu A$
OFF-state voltage for control	$V_C(OFF)$	*3	-	-	0.8	V
OFF-state current for control	$I_C(OFF)$	*3, $V_C=0.4V$	-	-	10	$\mu A$
Quiescent current	$I_q$	*3, $I_o=0A$	-	4	10	mA
Output OFF-state dissipation current	$I_{qs}$	*3, $V_C=0.4V$ , $I_o=0A$	-	-	5	$\mu A$

\*3 PQ05TZ51/11:  $V_{IN}=7V$ PQ09TZ51/11:  $V_{IN}=11V$ PQ12TZ51/11:  $V_{IN}=14V$ \*4 PQxxTZ51:  $I_o=5mA$  to  $0.5A$ , PQxxTZ51:  $I_o=5mA$  to  $1.0A$ 

\*5 Input voltage shall be the value when output voltage is 95% in comparison with the initial value.

\*6 In case of opening control terminal ②, output voltage turns off.

\*7 PQxxTZ51:  $I_o=0.3A$ , PQxxTZ11:  $I_o=0.5A$ \*8 PQ05TZ51/11:  $V_{IN}=6V$  to  $16V$ PQ09TZ51/11:  $V_{IN}=10V$  to  $20V$ PQ12TZ51/11:  $V_{IN}=13V$  to  $23V$ 

Fig.1 Test Circuit

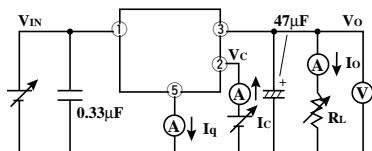
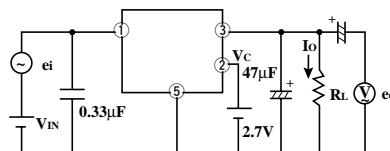



Fig.2 Test Circuit of Ripple Rejection

 $f=120Hz$  (sine wave) $e_i=0.5V_{rms}$  $V_{IN}=7V$  (PQ05TZ51/11) $V_{IN}=11V$  (PQ09TZ51/11) $V_{IN}=14V$  (PQ12TZ51/11) $I_o=0.3A$  $RR=20 \log (e_i/e_o)$

# Low Power-Loss Voltage Regulators


# PQ05TZ51/PQ05TZ11 Series

**Fig.3 Power Dissipation vs. Ambient Temperature**

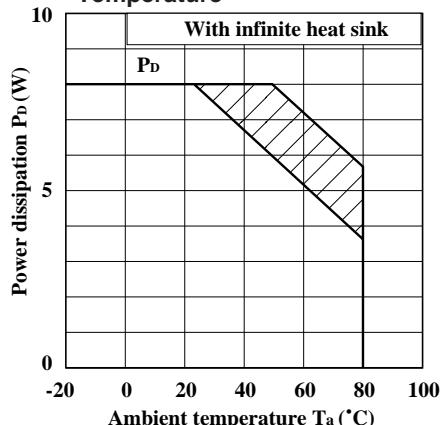


Note) Oblique line portion : Overheat protection may operate in this area.


**Fig.5 Output Voltage Deviation vs. Junction Temperature (PQ05TZ51/11)**

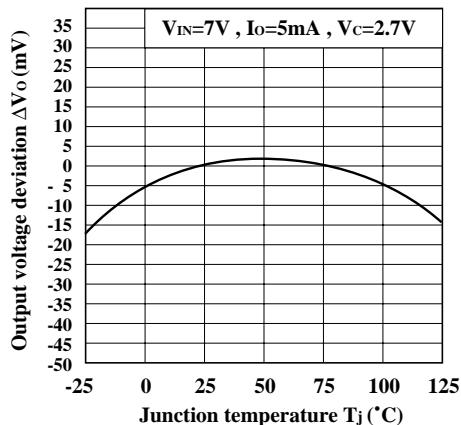


**Fig.7 Output Voltage Deviation vs. Junction Temperature (PQ12TZ51/11)**

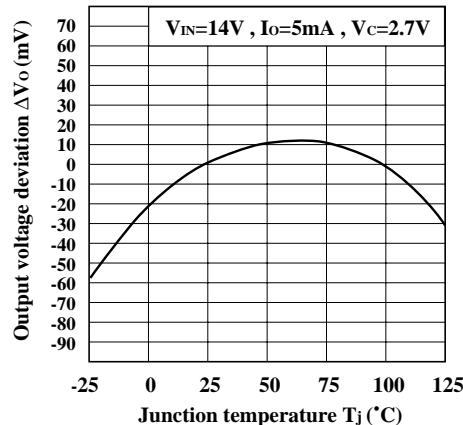


**Fig.4 Overcurrent Protection Characteristics (Typical Value) (xx=05,09,12)**

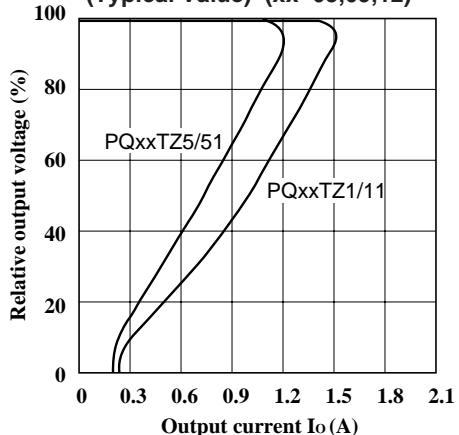


**Fig.6 Output Voltage Deviation vs. Junction Temperature (PQ09TZ51/11)**

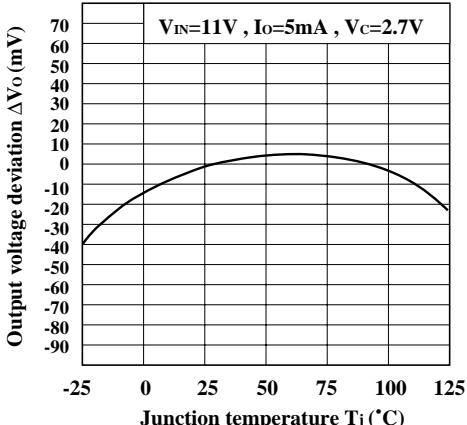


**Fig.8 Output Voltage vs. Input Voltage (PQ05TZ51)**

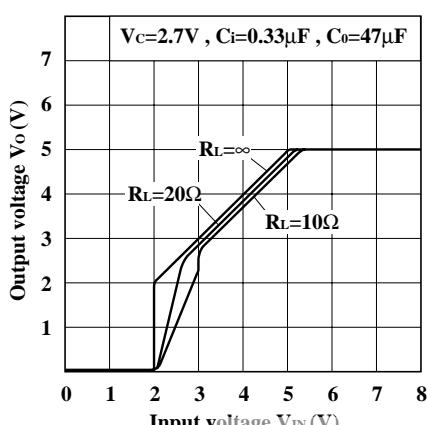


**Fig.9 Output Voltage vs. Input Voltage (Typical Value) (PQ09TZ51)**

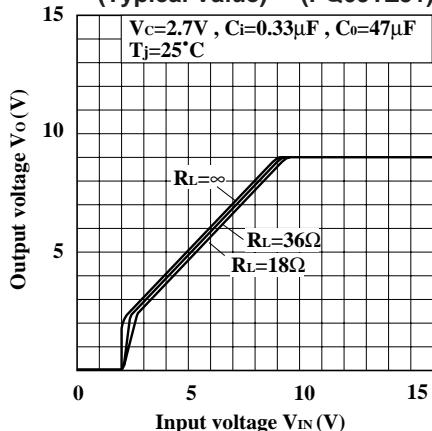


**Fig.11 Output Voltage vs. Input Voltage (Typical Value) (PQ05TZ11)**

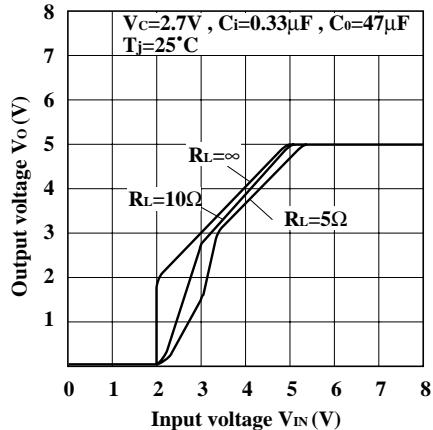


**Fig.13 Output Voltage vs. Input Voltage (PQ12TZ11)**

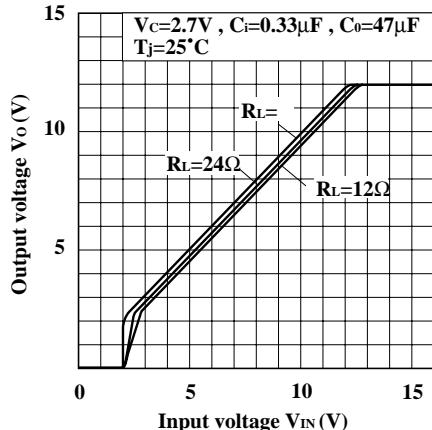


**Fig.10 Output Voltage vs. Input Voltage (Typical Value) (PQ12TZ51)**

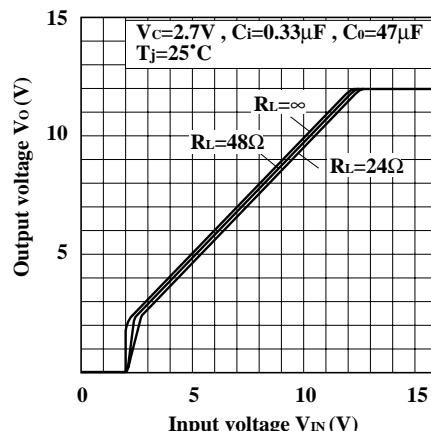


**Fig.12 Output Voltage vs. Input Voltage (PQ09TZ11)**

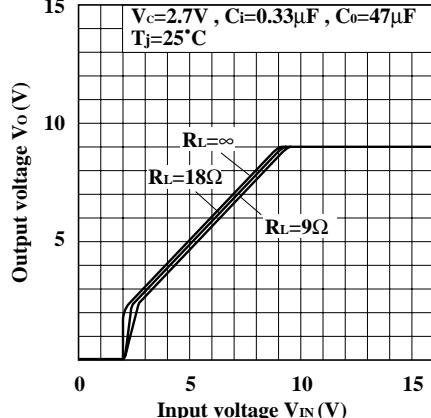


**Fig.14 Dropout Voltage vs. Junction Temperature (PQ05TZ51/PQ09TZ51/PQ12TZ51)**

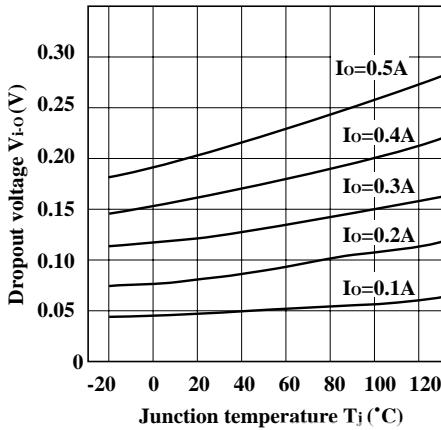


**Fig.15 Dropout Voltage vs. Junction Temperature (PQ05TZ11/PQ09TZ11/PQ12TZ11)**

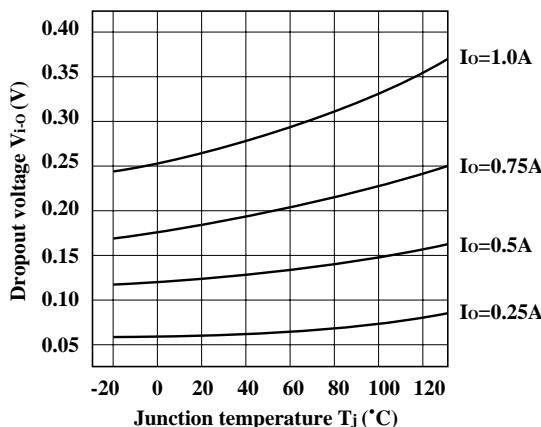


**Fig.17 Circuit Operating Current vs. Input Voltage (PQ09TZ51)**

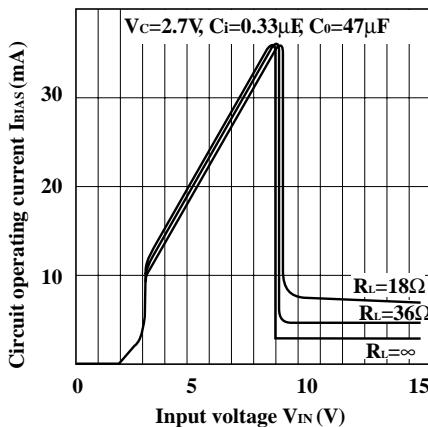


**Fig.19 Circuit Operating Current vs. Input Voltage (PQ05TZ11)**

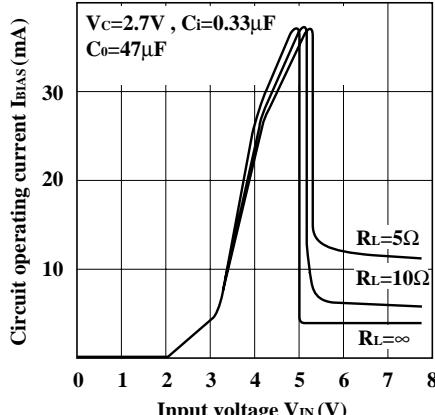


**Fig.16 Circuit Operating Current vs. Input Voltage (PQ05TZ51)**

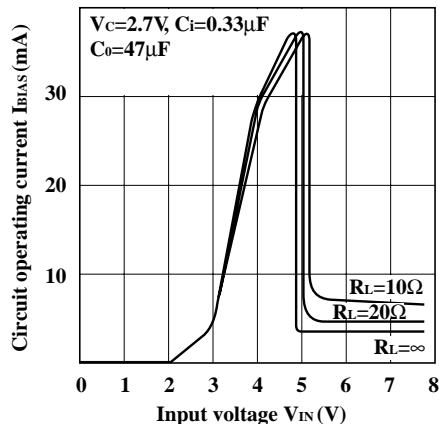


**Fig.18 Circuit Operating Current vs. Input Voltage (PQ12TZ51)**

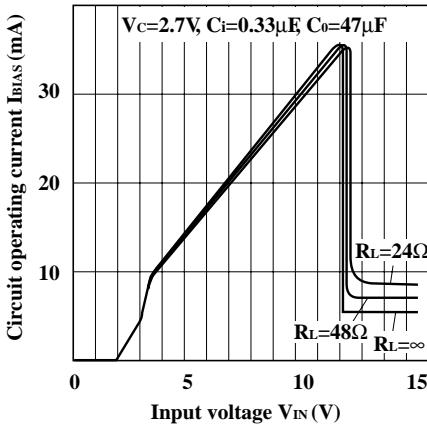


**Fig.20 Circuit Operating Current vs. Input Voltage (PQ09TZ11)**

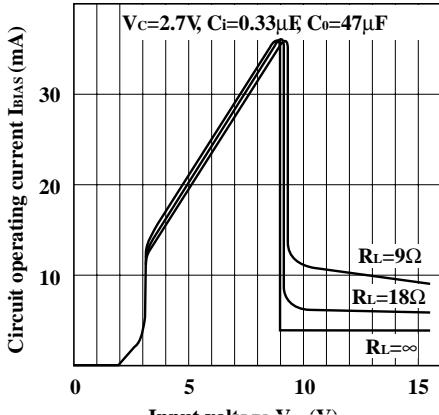


**Fig.21** Circuit Operating Current vs. Input Voltage (PQ12TZ11)

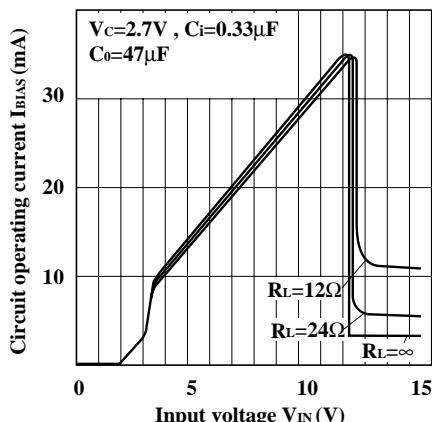


**Fig.23** Ripple Rejection vs. Input Ripple Frequency (PQ05TZ51/PQ09TZ51/PQ12TZ51)

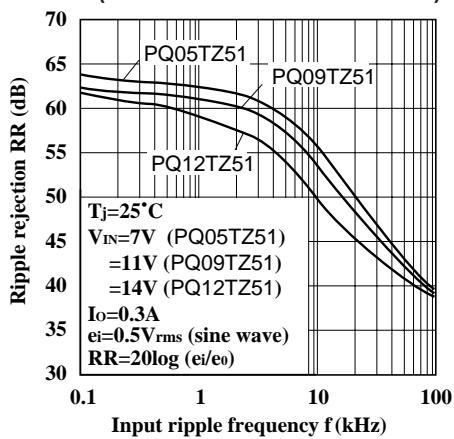


**Fig.25** Ripple Rejection vs. Output Current (PQ05TZ51/PQ09TZ51/PQ12TZ51)

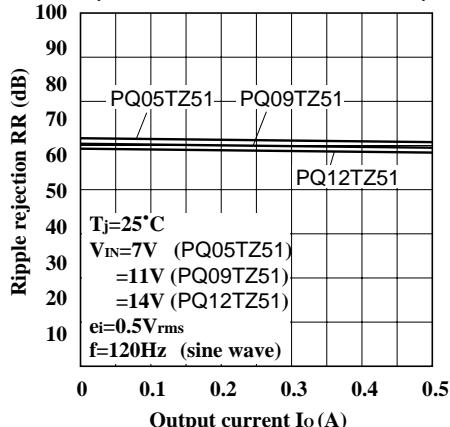


**Fig.22** Quiescent Current vs. Junction Temperature

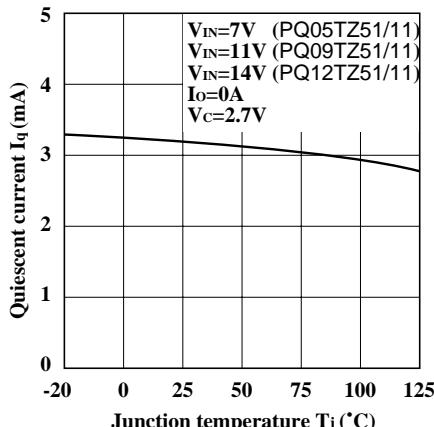


**Fig.24** Ripple Rejection vs. Input Ripple Frequency (PQ05TZ11/PQ09TZ11/PQ12TZ11)

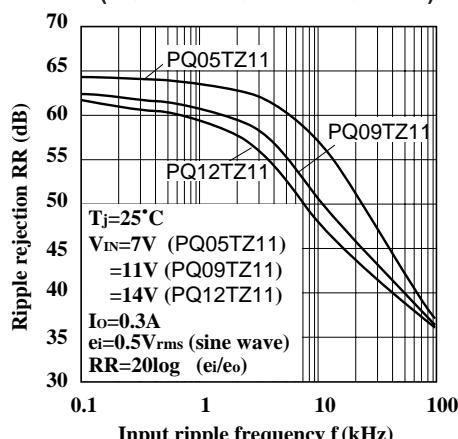


**Fig.26** Ripple Rejection vs. Output Current (PQ05TZ11/PQ09TZ11/PQ12TZ11)

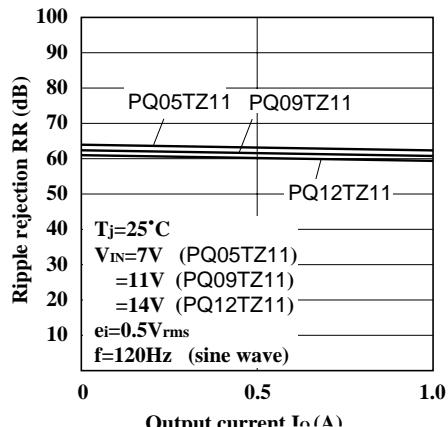


**Fig.27 Output Peak Current vs. Dropout Voltage (PQ05TZ51/PQ09TZ51/PQ12TZ51)**

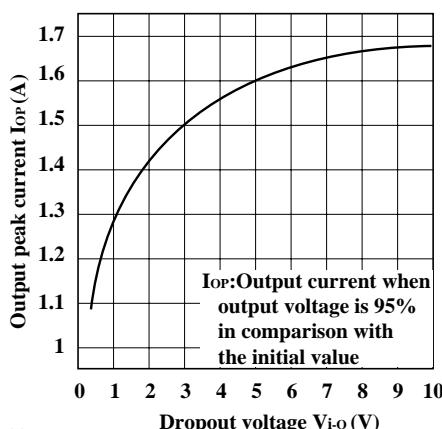


**Fig.29 Output Peak Current vs. Junction Temperature (PQ05TZ51/PQ09TZ51/PQ12TZ51)**

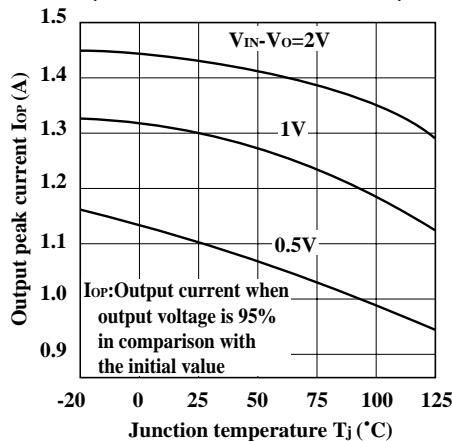



**Fig.31 Power Dissipation vs. Ambient Temperature(Typical Value)**

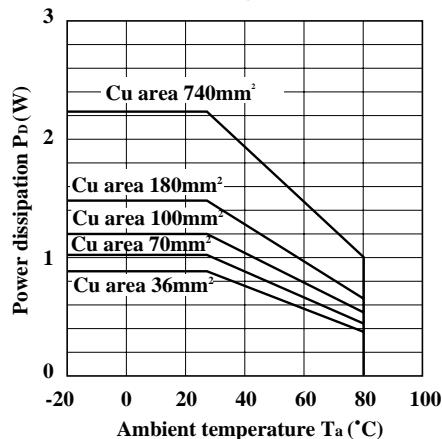

**Fig.28 Output Peak Current vs. Dropout Voltage (PQ05TZ11/PQ09TZ11/PQ12TZ11)**

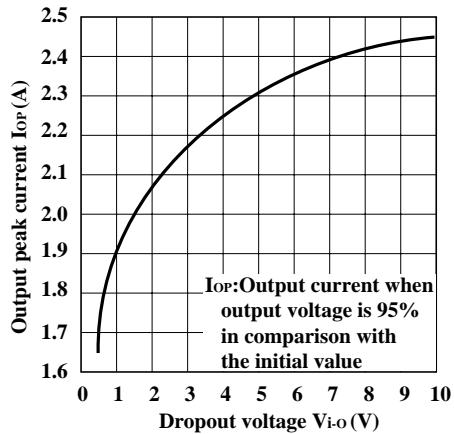


**Fig.30 Output Peak Current vs. Junction Temperature (PQ05TZ11/PQ09TZ11/PQ12TZ11)**

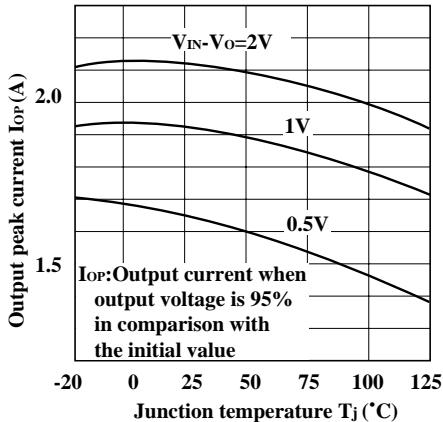

Material : Glass-cloth epoxy resin  
Size : 50X50X1.6mm<sup>3</sup>  
Cu thickness : 35μm

**■ ON/OFF Operation**

As shown in the figure, ON/OFF control function is available.

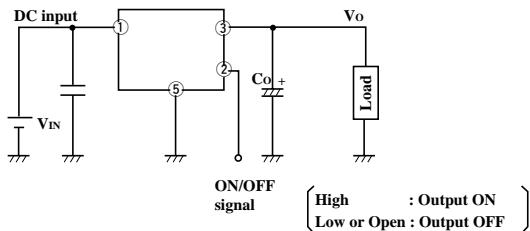**■ Model Line-ups for Tape-packaged Products**

Output current	Sleeve-packaged products		Tape-packaged products	
	Standard type	High-precision output type	Standard type	High-precision output type
0.5A output	-	PQ05TZ51 Series	-	PQ05TZ5U Series
1.0A output	-	PQ05TZ11 Series	-	PQ05TZ1U Series