

# STR-S6525

28102.11

## OFF-LINE SWITCHING REGULATOR - WITH POWER MOSFET OUTPUT

The STR-S6525 is specifically designed to meet the requirement for increased integration and reliability in off-line flyback converters operating in a constant OFF-time mode. The device incorporates the primary control and drive circuit with a discrete avalanche-rated high-voltage power MOSFET.

Crucial system parameters such as maximum ON time and OFF time are fixed during manufacture. Local control circuit decoupling and layout are optimized within the device.

Cycle-by-cycle current limiting, soft start, under-voltage lock-out with hysteresis, over-voltage protection, and thermal shutdown protect the device during all normal and overload conditions. Over-voltage protection, thermal shutdown, or an external fault signal be latched. The dual requirements of dielectric isolation and low transient thermal impedance and steady-state thermal resistance are satisfied in an over-molded single-in-line power package.

Proven in substantial volumes, this device and its fixed-frequency counterparts represents a significant advance in off-line SMPS reliability growth and integration.


### FEATURES

- Constant OFF-Time Converter Operating Mode
- Avalanche-Rated Power MOSFET Switch
- Pulse-by-Pulse Current Limiting
- Latched Over-Voltage and Thermal Protection
- Maximum ON Time and OFF Time Set During Manufacture
- Internal Under-Voltage Lockout with Hysteresis
- Over-Molded SIP with Integral Isolated Heat Spreader
- External Synchronization Capability

### ABSOLUTE MAXIMUM RATINGS

Supply Voltage, $V_{IN}$ .....	35 V
Drain-Source Voltage, $V_{DS}$ .....	600 V
Continuous Drain Current, $I_D$ .....	6.0 A
1 ms Single-Pulse Drain Current, $I_{DM}$ .....	24 A
Single-Pulse Avalanche Energy, $E_A$ .....	400 mJ
Feedback Input Current, $I_{FDBK}$ .....	20 mA
Fault-Latch Trig. Input Current, $I_{FL}$ .....	1.0 mA
dc $\leq 25\%$ , $I_{FLM}$ .....	-50 mA
Soft-Start Output Current, $I_{SS}$ .....	-3.0 mA
Over-Current Protection Voltage, $V_{OCP}$ .....	3.5 V
Insulation Voltage, $V_{WM(RMS)}$ .....	2000 V
Package Power Diss., $P_D$ .....	See Graph
FET Junction Temperature, $T_J$ .....	+150°C
Internal Frame Temperature, $T_F$ .....	+125°C
Operating Temperature Range, $T_A$ .....	-20°C to +125°C
Storage Temperature Range, $T_{slg}$ .....	-30°C to +125°C


Dwg. PK-002-1

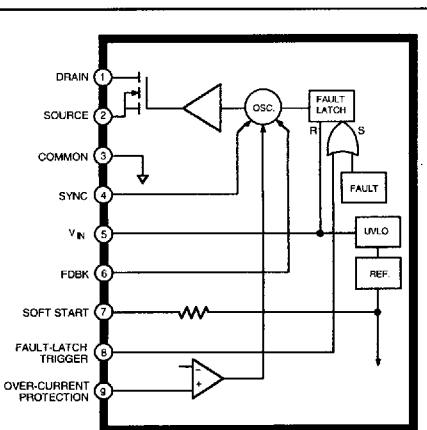

Always order by complete part number: **STR-S6525**.


# STR-S6525 OFF-LINE SWITCHING REGULATOR

## FUNCTIONAL BLOCK DIAGRAM

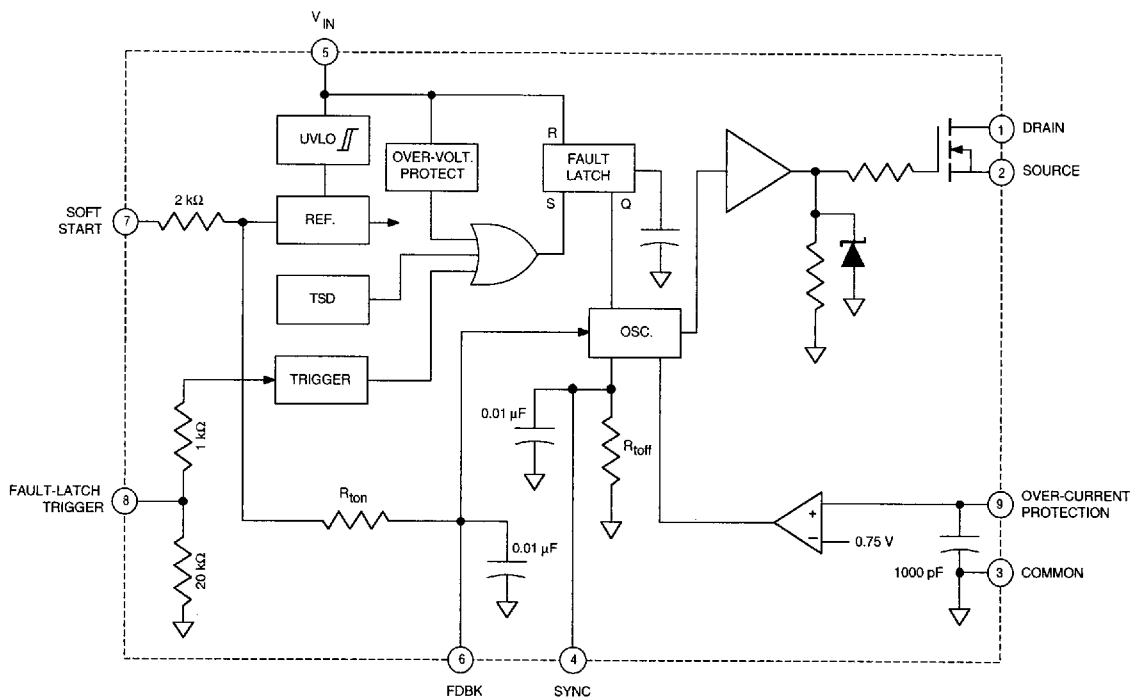


Dwg. GK-002-1

## ALLOWABLE PACKAGE POWER DISSIPATION

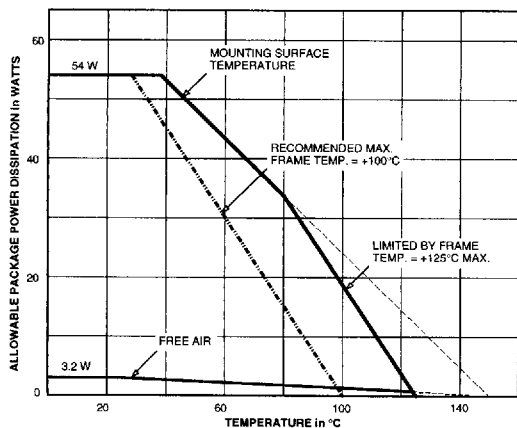

Dwg. GK-003-2

## MAXIMUM SAFE OPERATING AREA

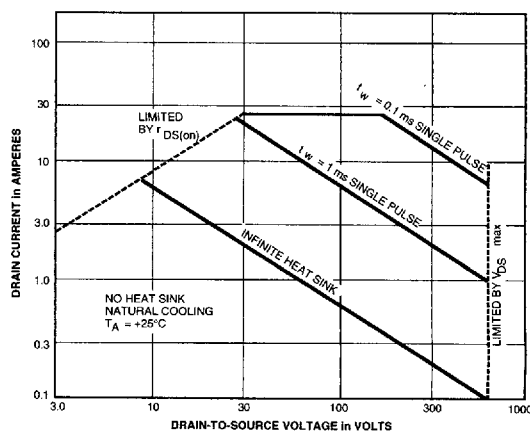

Dwg. GK-004-4

# STR-S6525


## OFF-LINE SWITCHING REGULATOR

**ELECTRICAL CHARACTERISTICS** at  $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 18\text{ V}$ , voltage measurements are referenced to Common (pin 3) (unless otherwise noted).

Characteristic	Symbol	Test Conditions	Limits			
			Min.	Typ.	Max.	Units
On-State Voltage	$V_{INT}$	Turn-on, increasing $V_{IN}$	14.4	—	17.6	V
Under-Voltage Lockout	$V_{INQ}$	Turn-off, decreasing $V_{IN}$	9.0	—	11	V
Over-Voltage Threshold	$V_{OVP(th)}$		26	—	31	V
FET Leakage Current	$I_{DSS}$	$V_{DS} = 600\text{ V}$	—	—	300	$\mu\text{A}$
FET ON Resistance	$r_{DS(on)}$	$V_{GS} = 10\text{ V}$ , $I_D = 3\text{ A}$	—	1.0	1.25	$\Omega$
Output Fall Time	$t_f$	$V_{DD} = 200\text{ V}$ , $I_D = 5\text{ A}$ , 10% to 90% $V_{DS}$	—	—	250	ns
Maximum ON Time	$t_{on}$	$I_{FDBK} = 0$	27	—	33	$\mu\text{s}$
Minimum OFF Time	$t_{off}$		50	—	62	$\mu\text{s}$
Over-Current Threshold	$V_{OCP(th)}$		700	—	800	mV
Feedback Threshold	$V_{FDBK(th)}$		—	750	—	mV
Soft-Start Voltage	$V_{SS}$		8.7	—	9.7	V
Sync. Trigger Threshold Volt.	$V_{SYNC(th)}$		—	3.0	—	V
Fault-Latch Trig. Threshold	$V_{FL(th)}$		680	—	880	mV
Fault-Latch Holding Current	$I_{INH}$	$V_{IN}$ reduced from 31 V to 8.5 V	—	340	400	$\mu\text{A}$
Fault-Latch Reset Voltage	$V_{INQ}$	$I_{IN} \leq 20\text{ }\mu\text{A}$ , $V_{IN}$ reduced from 31 V	6.5	—	8.5	V
Insulation RMS Voltage	$V_{WM(RMS)}$	All terminals simultaneous reference metal plate against backside	2000	—	—	V
Supply Current	$I_{IN(ON)}$	Operating	9.0	—	15	mA
	$I_{IN(OFF)}$	Start up, $V_{IN} = 14\text{ V}$	—	—	200	$\mu\text{A}$
Thermal Shutdown	$T_J$		125	150	—	$^\circ\text{C}$
Thermal Resistance	$R_{\theta JM}$	FET junction to mounting surface	—	2.0	—	$^\circ\text{C/W}$

NOTES: Negative current is defined as coming out of (sourcing) the specified device terminal.  
Typical Data is for design information only.

### ALLOWABLE AVALANCHE ENERGY

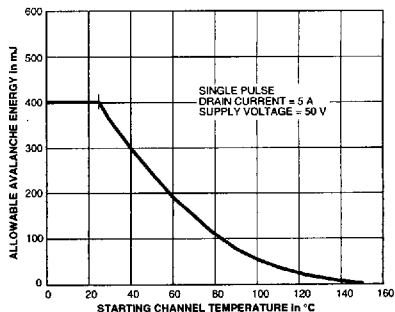


Dwg. GK-009-1

# STR-S6525 OFF-LINE SWITCHING REGULATOR

## TYPICAL APPLICATION

**WARNING: lethal potentials are present. See text.**

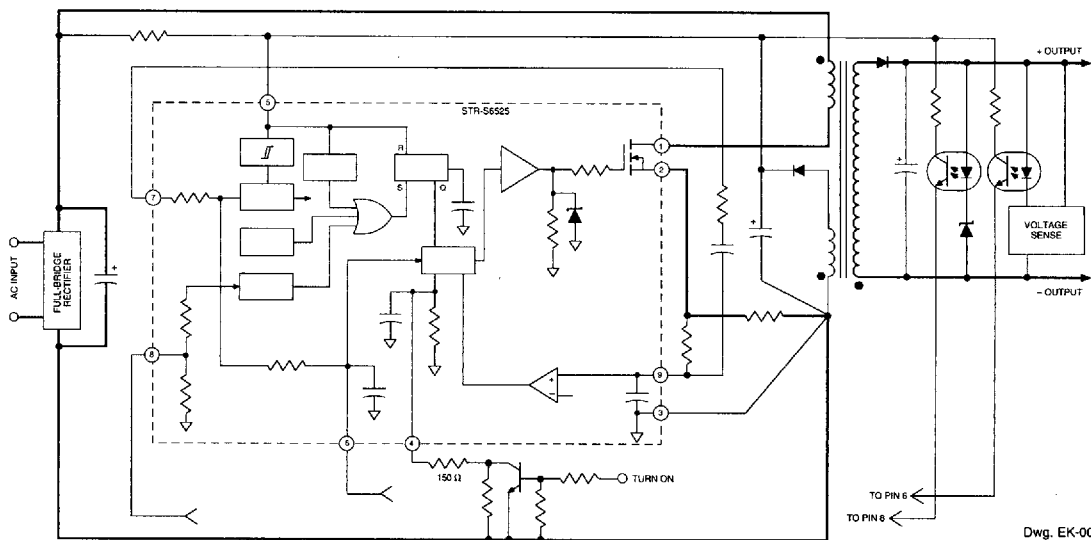


## APPLICATIONS INFORMATION



**WARNING** — These devices are designed to be operated at lethal voltages and energy levels. Circuit designs that embody these components must conform with applicable safety requirements. Precautions must be taken to prevent accidental contact with power-line potentials. Do not connect grounded test equipment. The use of an isolation transformer is recommended during circuit development and breadboarding.

The power MOSFET outputs of these devices are similar to the International Rectifier type IRFBC40. These devices feature an excellent combination of fast switching, ruggedized device design, low on-resistance, and cost effectiveness.

## TYPICAL CHARACTERISTICS

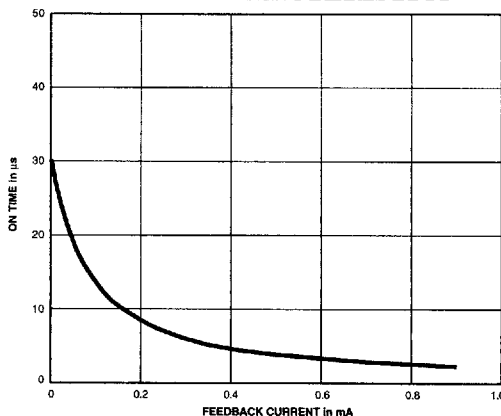

Dwg. GK-019