


BULGIN Polysnap® Power Inlet Modules

IEC Inlet/Outlet - Horizontal



- Horizontal Module Arrangement
- Snap-in Components
- Inlet Variations (with various tag sizes)
- Double Pole Switch Variations
- Filtered Inlet Option
- Options of O/I marked switches

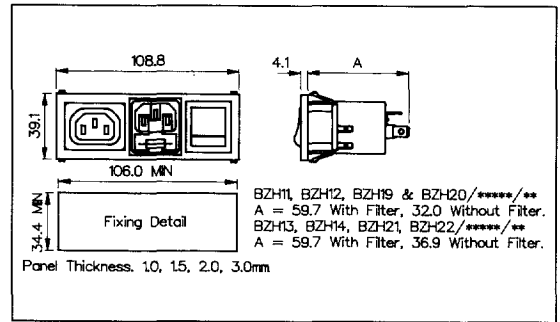

How to Order

BZH xx / xxxxx / xx

Type of Inlet / Outlet

Fused Power Inlet (cold condition) and Power Outlet, 2.8 or 6.3mm tabs:

11 = PF0011/63 + PX0695/63
12 = PF0011/28 + PX0695/28

Twin Fused Power Inlet (cold condition) and Power Outlet, 2.8 or 6.3mm tabs:

13 = PF0033/63 + PX0695/63
14 = PF0033/28 + PX0695/28

Fused Power Inlet (cold condition) and Shuttered Power Outlet, 2.8 or 6.3mm tabs:

19 = PF0011/63 + PX0783/63
20 = PF0011/28 + PX0783/28

Twin Fused Power Inlet (cold condition) and Shuttered Power Outlet, 2.8 or 6.3mm tabs:

21 = PF0033/63 + PX0783/63
22 = PF0033/28 + PX0783/28

Filtered or Non Filtered Inlet

Z0000 = Non Filtered
Axxxx = Standard
Bxxxx = Medical
Cxxxx = High Performance Standard

For Filtered inlet use 6th to 9th characters from filter ordering code see pages 71-74.

E.g. BZH11/**A0620**/10

Combination of Other Components

Neon Indicator:

03 = Red Neon Indicator

Double Pole Switch:

10 = D.P. Switch

Double Pole Neon Switch:

11 = D.P. Red Neon Switch

12 = D.P. Green Neon Switch

Double Pole High Inrush Switch:

13 = D.P. High Inrush Switch

Double Pole Switch Marked O/I:

70 = D.P. Switch (O/I)

Double Pole Neon Switch Marked (O/I):

76 = D.P. Red Neon Switch (O/I)

77 = D.P. Green Neon Switch (O/I)

Double Pole High Inrush Switch Marked (O/I):

78 = D.P. High Inrush Switch (O/I)

Note: For technical details of individual components please see page 54