

## 5A Adjustable Output Low Drop Voltage Regulator with Output ON/OFF control Function.

### FEATURES



- 5A Output Low Drop Voltage Regulator.
- Built in ON/OFF Control Terminal. (Active High)
- Built in Over Current, Over Heat Protection Function, ASO Protection Functions.
- Low Quiescent Current (Output OFF mode) : 0.5  $\mu$ A(Typ.)
- Adjustable Output Voltage Type :  $V_{OUT}=1.5\sim 7V$
- Low Voltage Operation :  $V_{opr}(\text{min.})=2.35V$ .

### LINE UP

ITEM	OUTPUT VOLTAGE (Typ.)	PACKAGE
KIA578R000FP	Adjustable (1.5~7.0)	D <sup>2</sup> PAK-5
KIA578R000PI	Adjustable (1.5~7.0)	TO-220IS-4

### MAXIMUM RATINGS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Input Voltage		$V_{IN}$	16	V
ON/OFF Control Voltage		$V_C$	16	V
Output Adjustment Terminal Voltage		$V_{ADJ}$	5	V
Output Current		$I_{OUT}$	5.0	A
Power Dissipation 1	PI	$P_{D1}$	1.5	W
	FP		2.0	
Power Dissipation 2	PI	$P_{D2}$	15	W
	FP		35	
Junction Temperature		$T_j$	150	°C
Operating Temperature		$T_{opr}$	-20 ~ 80	°C
Storage Temperature		$T_{stg}$	-30 ~ 125	°C

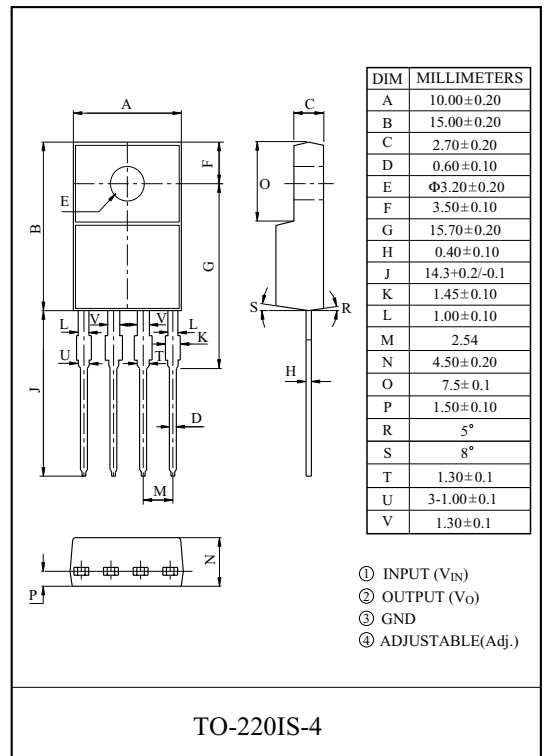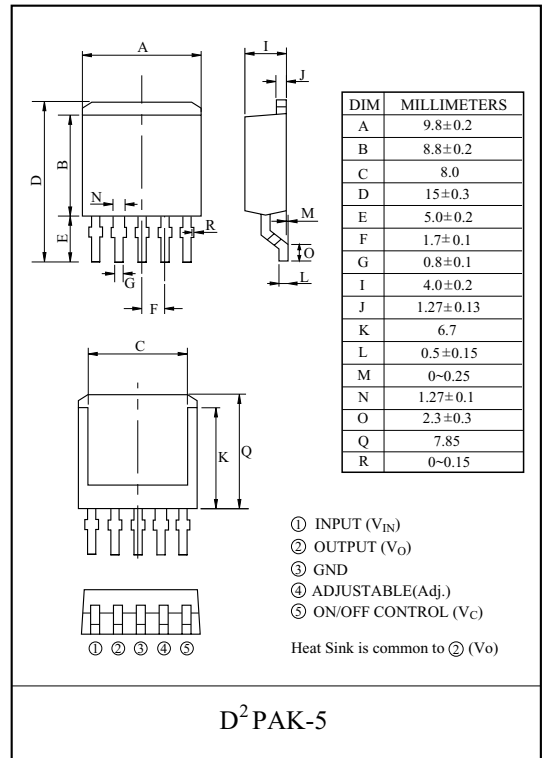


# KIA578R000FP/PI

**ELECTRICAL CHARACTERISTICS** (Unless otherwise specified,  $V_{IN}=5V$ ,  $V_O=3.3V$ ,  $I_O=1.5A$ ,  $R_1=1\text{ k}\Omega$ ,  $T_j=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input Voltage	$V_{IN}$	-	2.35	-	16	V
Output Voltage	$V_{OUT}$	-	1.5	-	16	V
Reference Voltage	$V_{ref}$	-	1.22	1.25	1.28	V
Load Regulation	Reg Load	$I_O=5\text{mA}\sim 5\text{A}$	-	0.2	2.0	%
Line Regulation	Reg Line	$V_{IN}=V_O+1$ to 7V, $I_O=5\text{mA}$	-	0.2	1.0	%
Temperature Coefficient of Output Voltage	$T_C V_O$	$T_j=0\sim 125^\circ\text{C}$ , $I_O=5\text{mA}$	-	$\pm 1.0$	$\pm 20$	%
Ripple Rejection	$R \cdot R$	$I_{OUT}=0.3\text{A}$ , $f=120\text{Hz}$ , $V_{ripple}=0.5\text{Vrms}$ , $V_{IN}=5\text{V}$ , $V_O=3\text{V}$	45	60	-	dB
Output ON state for control Voltage	$V_{C(ON)}$	-	2.0	-	-	V
Output ON state for control Current	$I_{C(ON)}$	$V_C=2.7\text{V}$	-	-	200	$\mu\text{A}$
Output OFF state for control Voltage	$V_{C(OFF)}$	$I_O=0$	-	-	0.8	V
Output OFF state for control Current	$I_{C(OFF)}$	$V_C=0.4\text{V}$	-	-	2.0	$\mu\text{A}$
Quiescent Current	$I_Q$	$I_O=0$	-	1	2	mA
Quiescent Current (OFF Mode)	$I_{Q(OFF)}$	$V_C=0.4\text{V}$	-	0.1	5	$\mu\text{A}$
Dropout Voltage	$V_D$	$I_O=5\text{A}$	-	-	0.8	V

## BLOCK DIAGRAM

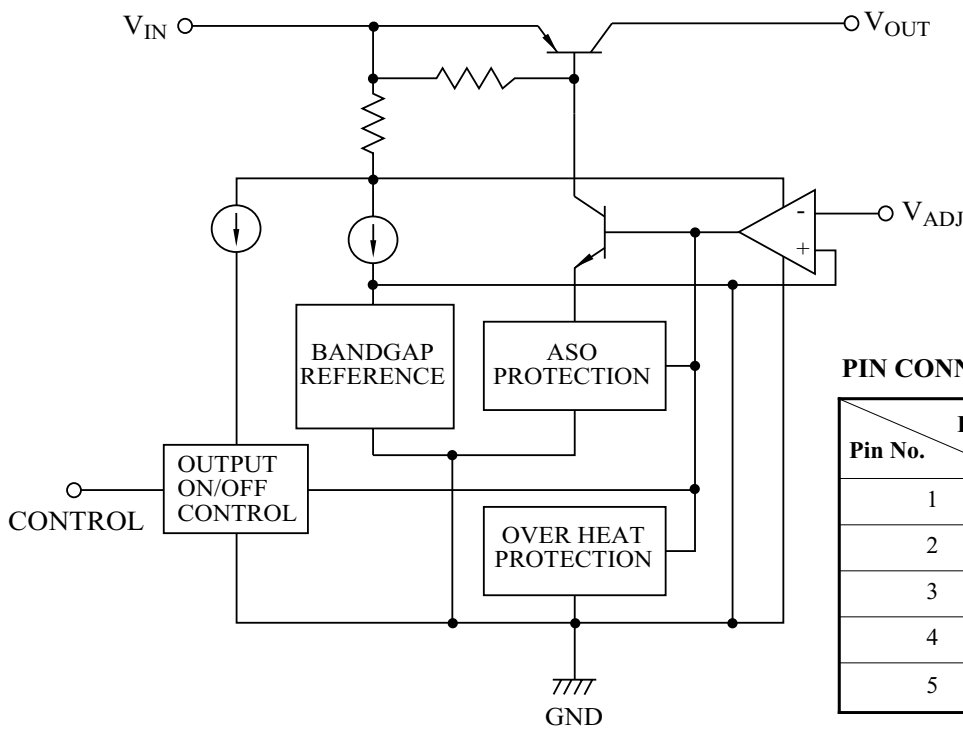


## PIN CONNECTION

Item Pin No.	KIA578R000PI (TO-220IS-4)	KIA578R000FP (D <sup>2</sup> PAK-5)
1	$V_{IN}$	$V_{IN}$
2	$V_{OUT}$	$V_{OUT}$
3	GND	GND
4	Adj	Adj
5	-	$V_C$


# KIA578R000FP/PI

**Fig. 1 Test Circuit**

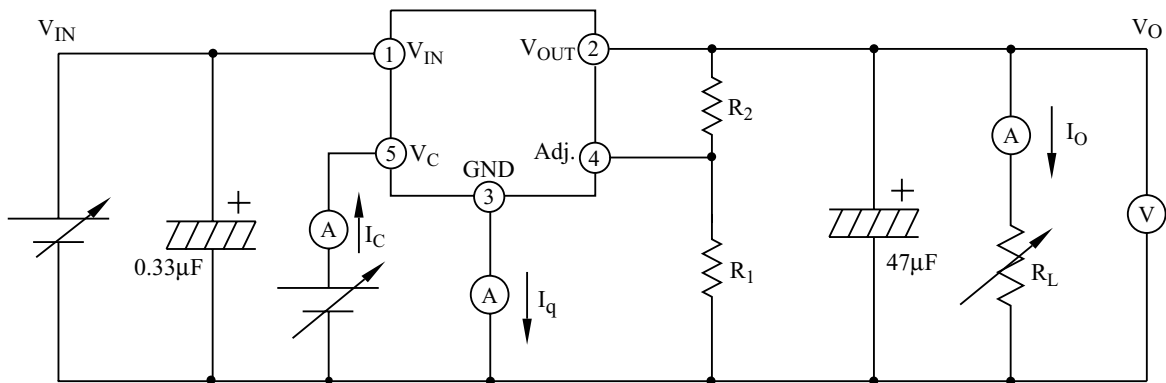

- 1)  $V_{OUT} = V_{ref} \times (1 + R_2/R_1)$ , ( $R_1 = 1k \Omega$ ,  $V_{ref} = 1.25V$ )
- 2) ⑤ Pin ( $V_c$ ) Terminal is only for KIA578R000FP (D<sup>2</sup>PAK-5)

**Fig. 2 Application Circuit for Standard**

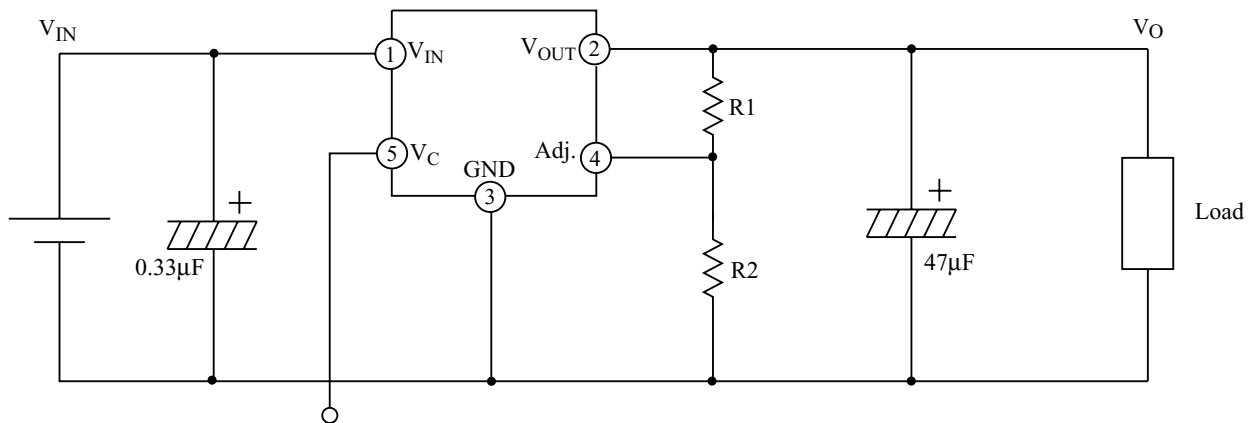

- (1) ON/OFF Signal [ High : Output ON ]  
[ Low/Open : Output OFF ]
- (2)  $V_{OUT} = V_{ref} \times (1 + R_1/R_2)$ , ( $R_1 = 1k \Omega$ ,  $V_{ref} = 1.25V$ )
- (3) ⑤ Pin ( $V_c$ ) Terminal is only for KIA578R000FP (D<sup>2</sup>PAK-5)

# KIA578R000FP/PI

Fig. 4  $I_O - V_O$

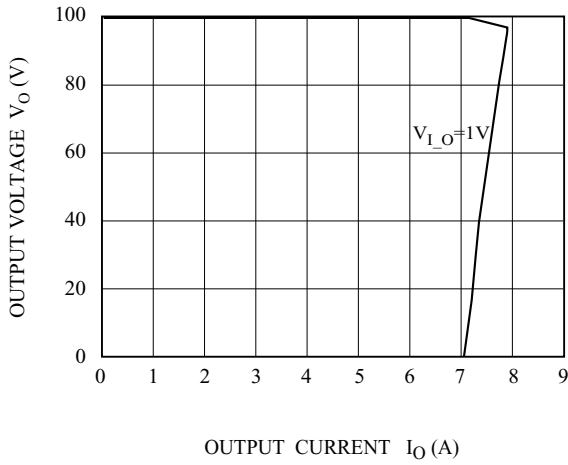


Fig. 5  $T_a - \Delta V_{ref}$

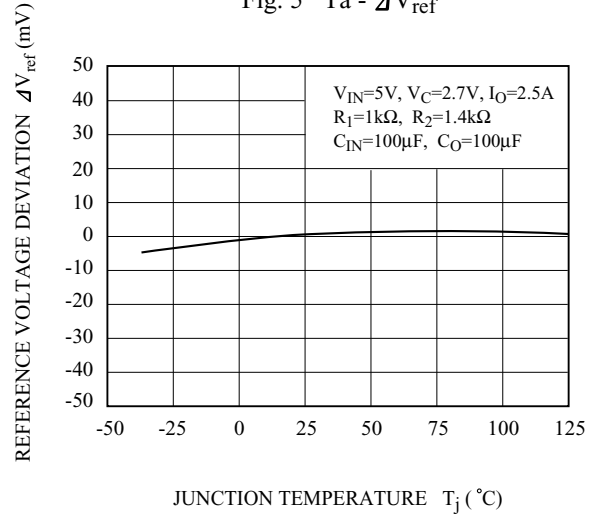


Fig. 6  $V_{IN} - V_O$

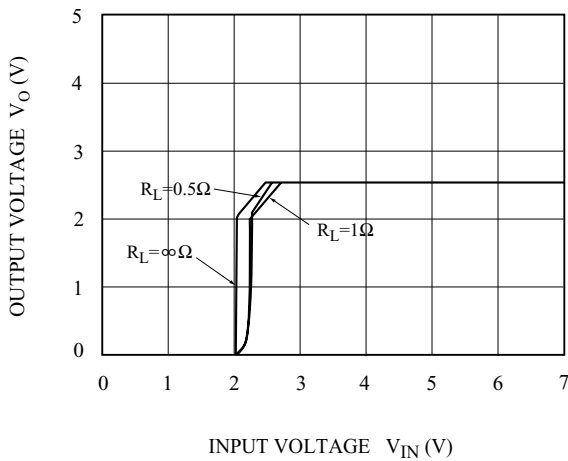


Fig. 7  $V_{IN} - I_{BIAS}$

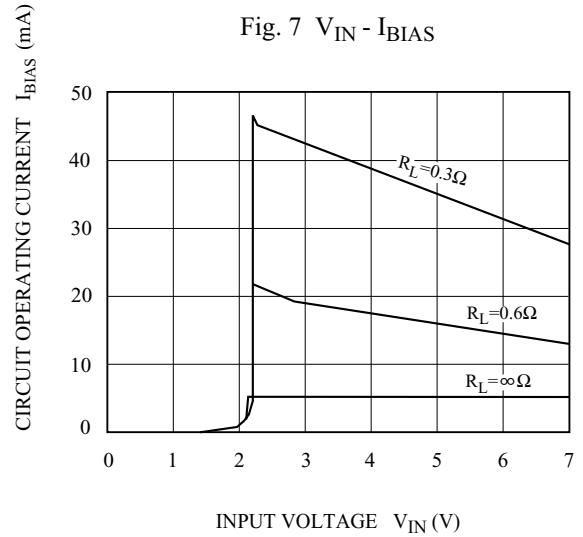


Fig. 8  $T_j - V_D$


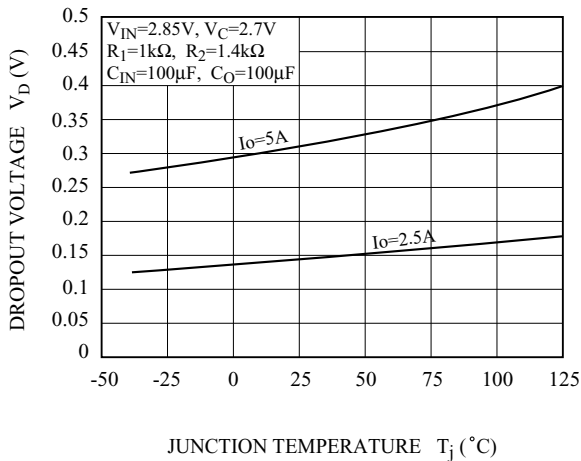


Fig. 9  $T_j - I_Q$

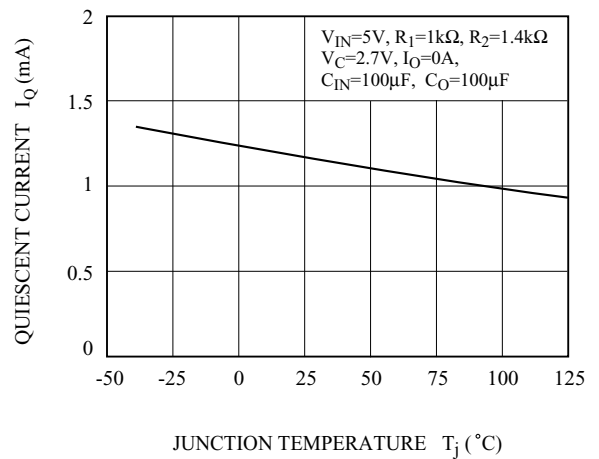

# KIA578R000FP/PI

Fig.10  $f_{IN}$  - R.R

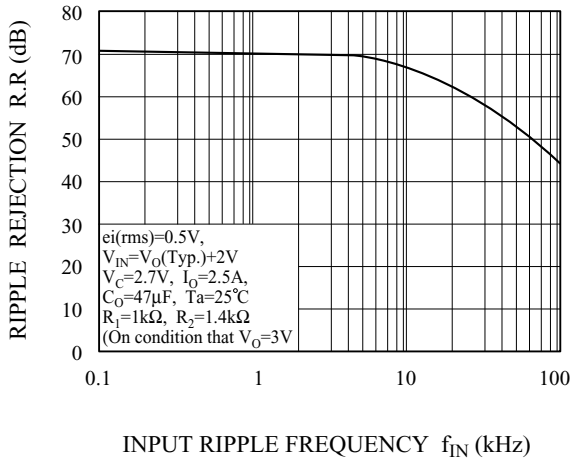


Fig. 11  $V_{IN}$  - R.R

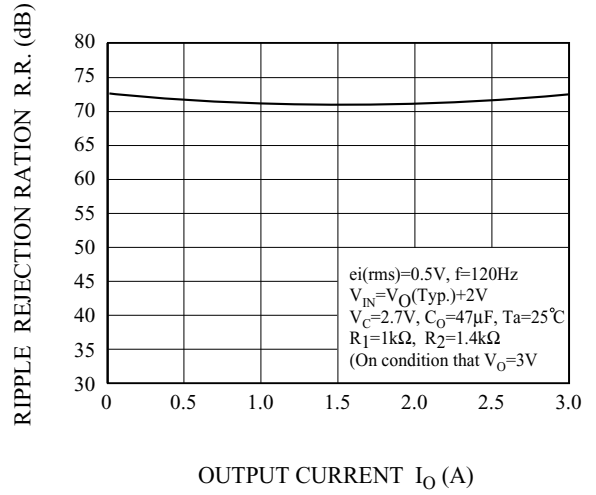


Fig. 12  $P_D$  -  $T_a$  (FP-Type  $D^2\text{PAK-5}$ )

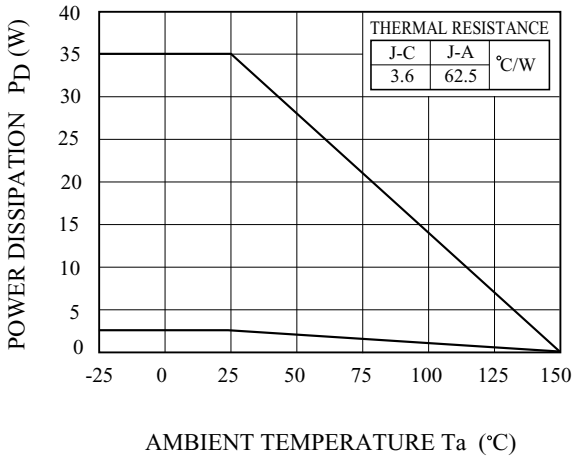


Fig.13  $P_D$  -  $T_a$  (PI-Type :  $\text{TO-220IS-4}$ )

