

Coaxial

Power Splitter/Combiner

2 Way-0° 75Ω 55 to 85 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	2
PORT 1	1
PORT 2	3

Outline Drawing

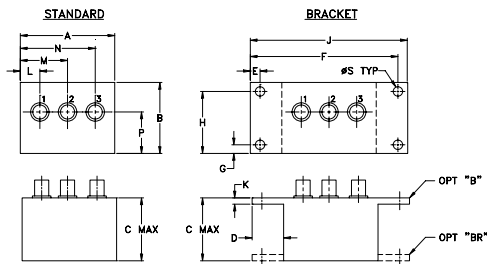

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	S	wt
2.25	1.38	1.24	.50	.150	3.100	.138	1.238	3.25	.10	.40	1.15	1.86	.64	.150	grams
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45	82.55	2.54	10.16	29.21	47.24	16.26	3.81	74.0

Features

- low insertion loss, 0.15 dB typ.
- high isolation, 35 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- rugged shielded case

Applications

- VHF
- radio communications
- instrumentation

ZSC-2375+
ZSC-2375



CASE STYLE: M22

Connectors	Model	Price	Qty.
BNC	ZSC-2375	\$52.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
$f_L - f_U$	Typ.	Min	Typ.	Max.	Max.	Max.
55-85	35	25	0.3	0.5	1	0.1


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
55.00	3.12	3.12	0.00	33.93	0.13	1.34	1.09	1.10
56.00	3.13	3.11	0.01	33.80	0.04	1.34	1.09	1.10
57.50	3.13	3.12	0.01	33.59	0.06	1.34	1.09	1.10
59.00	3.12	3.11	0.01	33.38	0.05	1.34	1.10	1.10
60.50	3.11	3.12	0.01	33.13	0.08	1.34	1.10	1.10
62.00	3.12	3.11	0.01	32.92	0.00	1.34	1.10	1.10
63.50	3.12	3.12	0.00	32.70	0.01	1.34	1.10	1.10
65.00	3.13	3.14	0.01	32.57	0.02	1.34	1.10	1.10
67.00	3.15	3.13	0.02	32.31	0.01	1.34	1.10	1.11
69.00	3.13	3.12	0.01	32.07	0.09	1.34	1.10	1.11
71.00	3.14	3.13	0.00	31.88	0.11	1.34	1.10	1.11
73.00	3.11	3.14	0.02	31.58	0.04	1.34	1.10	1.11
77.00	3.14	3.14	0.00	31.16	0.03	1.34	1.11	1.11
81.00	3.13	3.13	0.01	30.76	0.05	1.35	1.11	1.12
85.00	3.14	3.11	0.02	30.29	0.04	1.35	1.11	1.12

1. Total Loss = Insertion Loss + 3dB splitter loss.

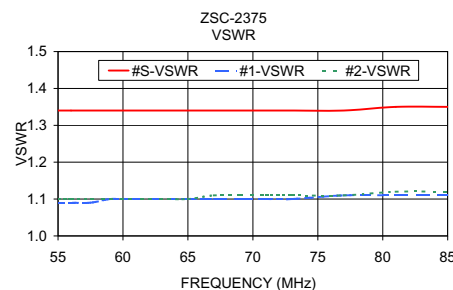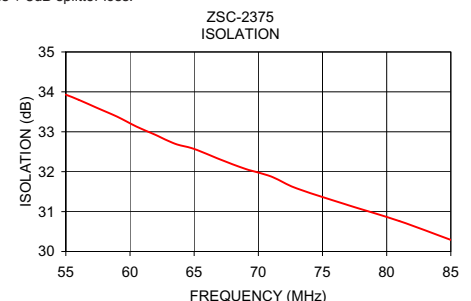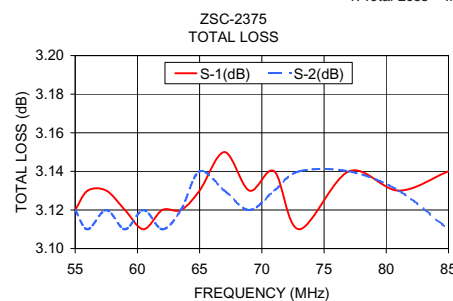

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine **Mini-Circuits** Provides ACTUAL Data Instantly at minicircuits.com
IFIRF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M127604
ZSC-2375
HY/TD/CP
100629