

## 3-Terminal Negative Voltage Regulator


### ■ GENERAL DESCRIPTION

The NJM79M00 series of 3-Terminal Negative Voltage Regulators are constructed using the New JRC Planar epitaxial process. These regulators employ internal current limiting, thermal shutdown and safe-area compensation, making them essentially indestructible. If adequate heat sinking is provided, they can deliver up to 500mA output current. They are intended as fixed voltage regulators in a wide range of applications including local (on-card) regulation for elimination of noise and distribution problems associated with single point regulation. In addition to use a fixed voltage regulators, these devices can be used with external components to obtain adjustable output voltages and currents.

### ■ FEATURES


- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Excellent Ripple Rejection
- Guaranteed 500mA Output Current
- Package Outline TO-220F, TO-252
- Bipolar Technology

### ■ EQUIVALENT CIRCUIT

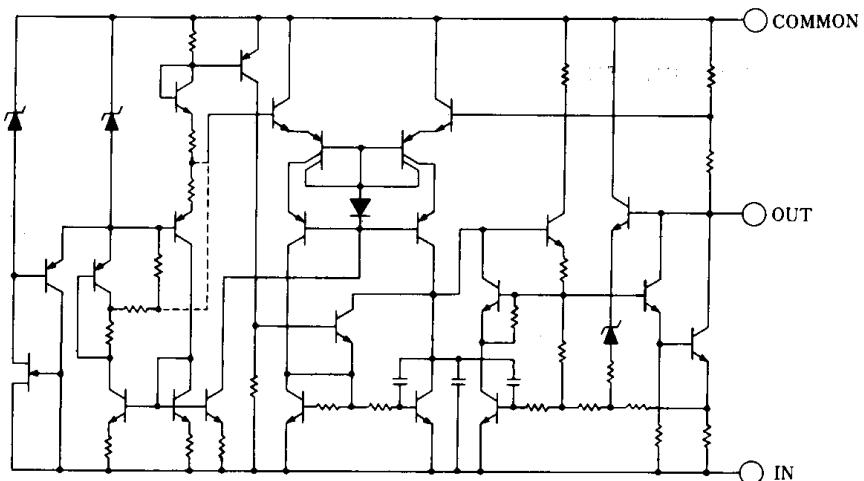


### ■ PACKAGE OUTLINE

(TO-220F)



(TO-252)



NJM79M00FA

NJM79M00DL1A

1. COMMON  
2. IN  
3. OUT

1. COMMON  
2. IN  
3. OUT

(note) The radiation fin is connected to Pin 2.

3

## ■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MAXIMUM RATINGS		UNIT
Input Voltage	$V_{IN}$	79M05~79M09	-35	V
		79M12~79M15	-35	
		79M18~79M24	-40	
Storage Temperature Range	$T_{STG}$	TO-220F -40~+150 TO-252 -40~+150		°C
		Operating Junction Temperature	$T_j$	
Operating Temperature Range		TO-220F -30~+150 TO-252 -30~+150		°C
		Operating Junction Temperature	$T_{OPR}$	
Power Dissipation	$P_D$	7.5( $T_c \leq 75^\circ C$ )		W

3

## ■ THERMAL CHARACTERISTICS

Thermal Resistance				°C/W
		TO220F	TO252	
		$\theta_{JA}$	$\theta_{JC}$	
	Junction-to-Ambient Temperature	60	125	
	Junction-to-Case	7	12.5	

## ■ ELECTRICAL CHARACTERISTICS ( $T_j=25^\circ C$ , $C_{IN}=2.2 \mu F$ , $C_O=1.0 \mu F$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM79M05 FA/DL1A</b>						
Output Voltage	$V_O$	$V_{IN}=-10V$ , $I_O=0.35A$	-4.8	-5.0	-5.2	V
Quiescent Current	$I_Q$	$V_{IN}=-10V$ , $I_O=0mA$	—	2.2	5.0	mA
Load Regulation	$\Delta V_O / I_O$	$V_{IN}=-10V$ , $I_O=0.005\sim 0.5A$	—	35	50	mV
Line Regulation	$\Delta V_O / V_{IN}$	$V_{IN}=-7\sim-25V$ , $I_O=0.35A$	—	5	50	mV
Ripple Rejection	RR	$V_{IN}=-10V$ , $I_O=0.35A$ , $C_{in}=2V_{P-P}$ , $f=120Hz$	50	58	—	dB
Output Noise Voltage	$V_{NO}$	$V_{IN}=-10V$ , $I_O=0.35A$ , $BW=10Hz\sim100kHz$	—	100	—	$\mu V$
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T$	$V_{IN}=-10V$ , $I_O=5mA$	—	-0.4	—	$mV/^\circ C$

■ ELECTRICAL CHARACTERISTICS (T<sub>j</sub>=25°C, C<sub>IN</sub>=2.2 μF, C<sub>O</sub>=1.0 μF) Measurement is to be conducted in pulse testing

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM79M06 FA/DL1</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-11V, I <sub>O</sub> =0.35A	-5.75	-6.0	-6.25	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-11V, I <sub>O</sub> =0mA	—	2.2	5.0	mA
Load Regulation	ΔV <sub>O</sub> -I <sub>O</sub>	V <sub>IN</sub> =-11V, I <sub>O</sub> =0.005~0.5A	—	35	60	mV
Line Regulation	ΔV <sub>O</sub> -V <sub>IN</sub>	V <sub>IN</sub> =-8~-25V, I <sub>O</sub> =0.35A	—	5	60	mV
Ripple Rejection	RR	V <sub>IN</sub> =-11V, I <sub>O</sub> =0.35A, e <sub>in</sub> =2V <sub>P,P</sub> , f=120Hz	50	57	—	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-11V, I <sub>O</sub> =0.35A, BW=10Hz~100kHz	—	110	—	μV
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	V <sub>IN</sub> =-11V, I <sub>O</sub> =5mA	—	-0.5	—	mV/°C
<b>NJM79M08 FA/DL1</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-14V, I <sub>O</sub> =0.35A	-7.7	-8.0	-8.3	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-14V, I <sub>O</sub> =0mA	—	2.2	5.0	mA
Load Regulation	ΔV <sub>O</sub> -I <sub>O</sub>	V <sub>IN</sub> =-14V, I <sub>O</sub> =0.005~0.5A	—	40	80	mV
Line Regulation	ΔV <sub>O</sub> -V <sub>IN</sub>	V <sub>IN</sub> =-10.5~-25V, I <sub>O</sub> =0.35A	—	8	80	mV
Ripple Rejection	RR	V <sub>IN</sub> =-14V, I <sub>O</sub> =0.35A, e <sub>in</sub> =2V <sub>P,P</sub> , f=120Hz	50	55	—	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-14V, I <sub>O</sub> =0.35A, BW=10Hz~100kHz	—	130	—	μV
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	V <sub>IN</sub> =-14V, I <sub>O</sub> =5mA	—	-0.7	—	mV/°C
<b>NJM79M09 FA/DL1</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-15V, I <sub>O</sub> =0.35A	-8.65	-9.0	-9.35	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-15V, I <sub>O</sub> =0mA	—	2.2	5.0	mA
Load Regulation	ΔV <sub>O</sub> -I <sub>O</sub>	V <sub>IN</sub> =-15V, I <sub>O</sub> =0.005~0.5A	—	40	90	mV
Line Regulation	ΔV <sub>O</sub> -V <sub>IN</sub>	V <sub>IN</sub> =-11.5~-25V, I <sub>O</sub> =0.35A	—	8	80	mV
Ripple Rejection	RR	V <sub>IN</sub> =-15V, I <sub>O</sub> =0.35A, e <sub>in</sub> =2V <sub>P,P</sub> , f=120Hz	50	54	—	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-15V, I <sub>O</sub> =0.35A, BW=10Hz~100kHz	—	150	—	μV
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	V <sub>IN</sub> =-15V, I <sub>O</sub> =5mA	—	-0.8	—	mV/°C
<b>NJM79M12 FA/DL1</b>						
Output Voltage	V <sub>O</sub>	V <sub>IN</sub> =-19V, I <sub>O</sub> =0.35A	-11.5	-12.0	-12.5	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =-19V, I <sub>O</sub> =0mA	—	2.7	6.0	mA
Load Regulation	ΔV <sub>O</sub> -I <sub>O</sub>	V <sub>IN</sub> =-19V, I <sub>O</sub> =0.005~0.5A	—	30	120	mV
Line Regulation	ΔV <sub>O</sub> -V <sub>IN</sub>	V <sub>IN</sub> =-14.5~-30V, I <sub>O</sub> =0.35A	—	3	80	mV
Ripple Rejection	RR	V <sub>IN</sub> =-19V, I <sub>O</sub> =0.35A, e <sub>in</sub> =2V <sub>P,P</sub> , f=120Hz	54	71	—	dB
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =-19V, I <sub>O</sub> =0.35A, BW=10Hz~100kHz	—	150	—	μV
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	V <sub>IN</sub> =-19V, I <sub>O</sub> =5mA	—	-0.4	—	mV/°C


3

■ ELECTRICAL CHARACTERISTICS (  $T_j=25^\circ\text{C}$ ,  $C_{IN}=2.2\ \mu\text{F}$ ,  $C_O=1.0\ \mu\text{F}$  ) Measurement is to be conducted in pulse testing.


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>NJM79M15 FA/DL1</b>						
Output Voltage	$V_O$	$V_{IN}=-23\text{V}$ , $I_O=0.35\text{A}$	-14.4	-15.0	-15.6	$\text{V}$
Quiescent Current	$I_Q$	$V_{IN}=-23\text{V}$ , $I_O=0\text{mA}$	—	2.7	6.0	$\text{mA}$
Load Regulation	$\Delta V_O/I_O$	$V_{IN}=-23\text{V}$ , $I_O=0.005\sim 0.5\text{A}$	—	30	150	$\text{mV}$
Line Regulation	$\Delta V_O/V_{IN}$	$V_{IN}=-17.5\sim -30\text{V}$ , $I_O=0.35\text{A}$	—	3	80	$\text{mV}$
Ripple Rejection	$RR$	$V_{IN}=-23\text{V}$ , $I_O=0.35\text{A}$ , $e_{in}=2\text{V}_{\text{P-P}}$ , $f=120\text{Hz}$	54	70	—	$\text{dB}$
Output Noise Voltage	$V_{NO}$	$V_{IN}=-23\text{V}$ , $I_O=0.35\text{A}$ , $BW=10\text{Hz}\sim 100\text{kHz}$	—	170	—	$\mu\text{V}$
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-23\text{V}$ , $I_O=5\text{mA}$	—	-0.5	—	$\text{mV}/^\circ\text{C}$
<b>NJM79M18 FA/DL1</b>						
Output Voltage	$V_O$	$V_{IN}=-27\text{V}$ , $I_O=0.35\text{A}$	-17.3	-18.0	-18.7	$\text{V}$
Quiescent Current	$I_Q$	$V_{IN}=-27\text{V}$ , $I_O=0\text{mA}$	—	2.7	6.0	$\text{mA}$
Load Regulation	$\Delta V_O/I_O$	$V_{IN}=-27\text{V}$ , $I_O=0.005\sim 0.5\text{A}$	—	35	180	$\text{mV}$
Line Regulation	$\Delta V_O/V_{IN}$	$V_{IN}=-21\sim -33\text{V}$ , $I_O=0.35\text{A}$	—	4	80	$\text{mV}$
Ripple Rejection	$RR$	$V_{IN}=-27\text{V}$ , $I_O=0.35\text{A}$ , $e_{in}=2\text{V}_{\text{P-P}}$ , $f=120\text{Hz}$	54	69	—	$\text{dB}$
Output Noise Voltage	$V_{NO}$	$V_{IN}=-27\text{V}$ , $I_O=0.35\text{A}$ , $BW=10\text{Hz}\sim 100\text{kHz}$	—	200	—	$\mu\text{V}$
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-27\text{V}$ , $I_O=5\text{mA}$	—	-0.6	—	$\text{mV}/^\circ\text{C}$
<b>NJM79M24 FA/DL1</b>						
Output Voltage	$V_O$	$V_{IN}=-33\text{V}$ , $I_O=0.35\text{A}$	-23.0	-24.0	-25.0	$\text{V}$
Quiescent Current	$I_Q$	$V_{IN}=-33\text{V}$ , $I_O=0\text{mA}$	—	2.7	6.0	$\text{mA}$
Load Regulation	$\Delta V_O/I_O$	$V_{IN}=-33\text{V}$ , $I_O=0.005\sim 0.5\text{A}$	—	40	240	$\text{mV}$
Line Regulation	$\Delta V_O/V_{IN}$	$V_{IN}=-27\sim -38\text{V}$ , $I_O=0.35\text{A}$	—	5	80	$\text{mV}$
Ripple Rejection	$RR$	$V_{IN}=-33\text{V}$ , $I_O=0.35\text{A}$ , $e_{in}=2\text{V}_{\text{P-P}}$ , $f=120\text{Hz}$	54	66	—	$\text{dB}$
Output Noise Voltage	$V_{NO}$	$V_{IN}=-33\text{V}$ , $I_O=0.35\text{A}$ , $BW=10\text{Hz}\sim 100\text{kHz}$	—	300	—	$\mu\text{V}$
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T$	$V_{IN}=-33\text{V}$ , $I_O=5\text{mA}$	—	-0.8	—	$\text{mV}/^\circ\text{C}$

## ■ TEST CIRCUIT

1. Output Voltage, Line Regulation, Load Regulation, Quiescent Current, Average Temperature Coefficient of Output Voltage, Output Noise Voltage


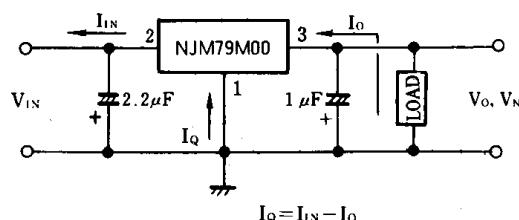


2. Ripple Rejection

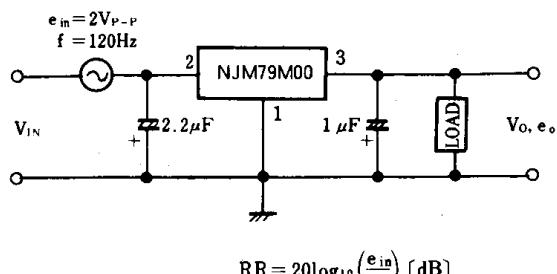


3

## ■ POWER DISSIPATION VS. AMBIENT TEMPERATURE

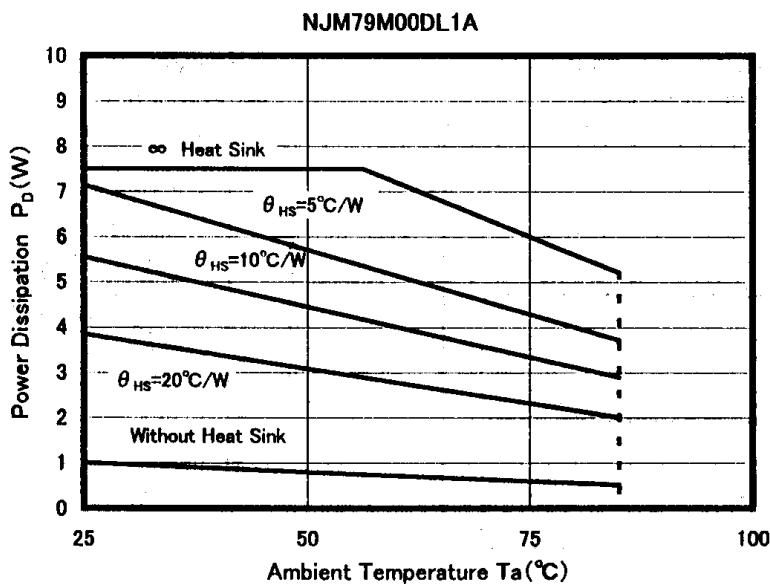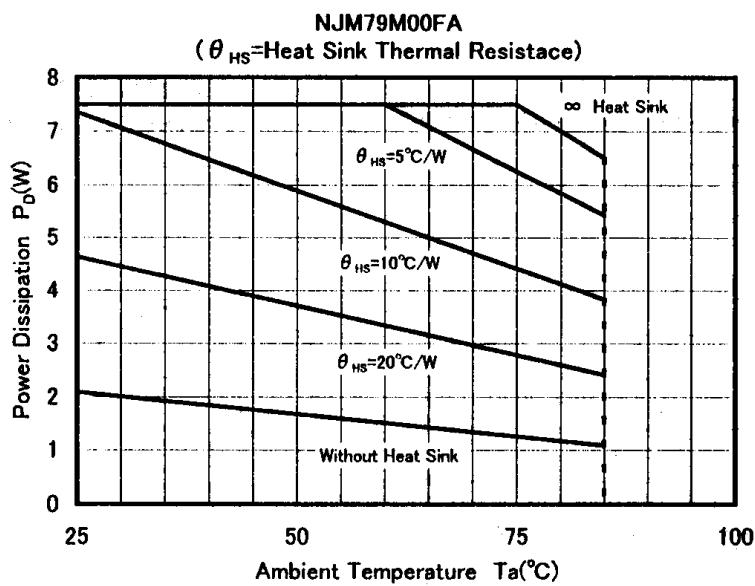


## ■ TYPICAL CHARACTERISTICS


**NJM79M00 Output Characteristics**  
( $T_j = 25^\circ\text{C}$ ,  $I_o = 0.35\text{A}$ )

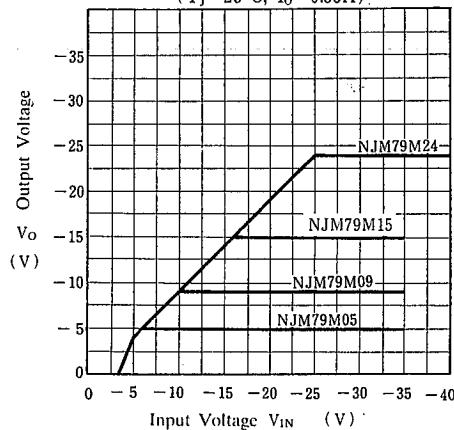


**NJM79M05/15/24 Load Characteristics**  
( $T_j = 25^\circ\text{C}$ )

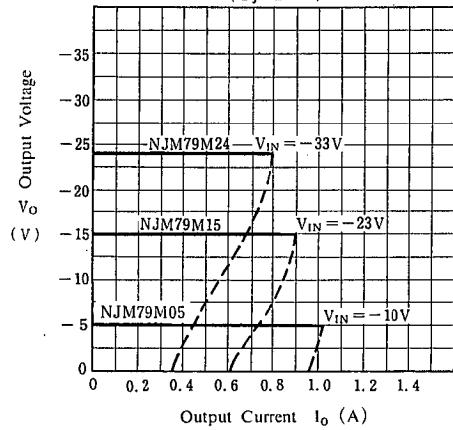


**NJM79M05/12/24 Output Voltage vs. Junction Temperature**

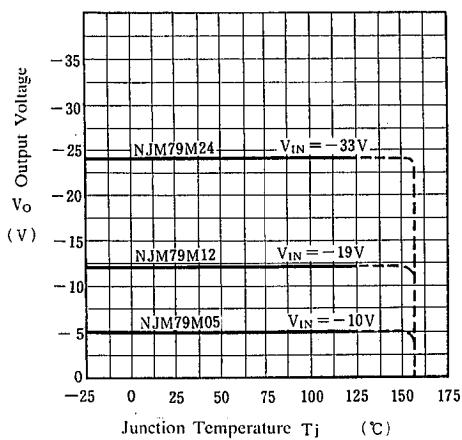


**NJM79M12 Output Voltage vs. Low Input Voltage**  
( $T_j = 25^\circ\text{C}$ )



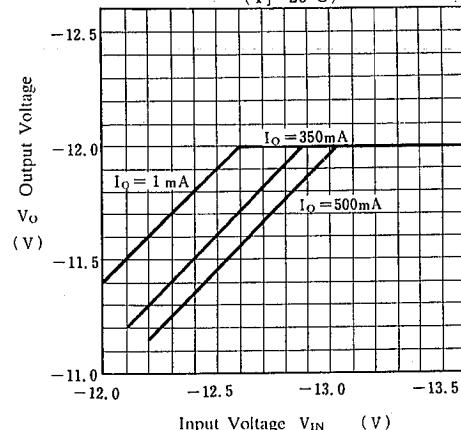


**NJM79M00 Series Short Circuit Output Current**  
( $T_j = 25^\circ\text{C}$ )

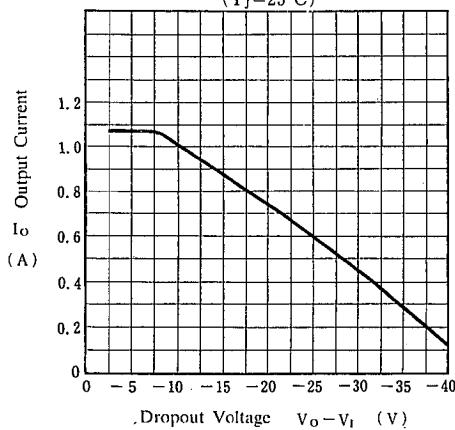

**NJM79M05/15/24 Ripple Rejection vs. Frequency**

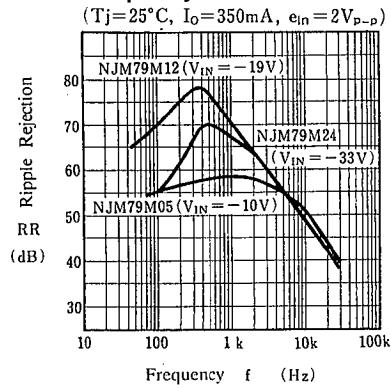

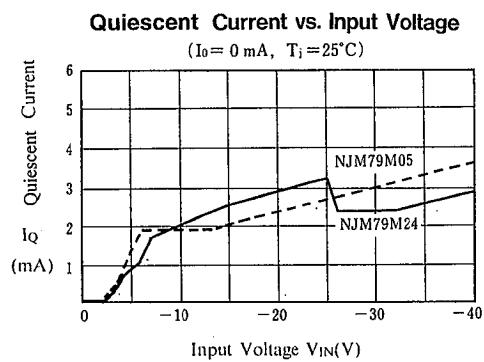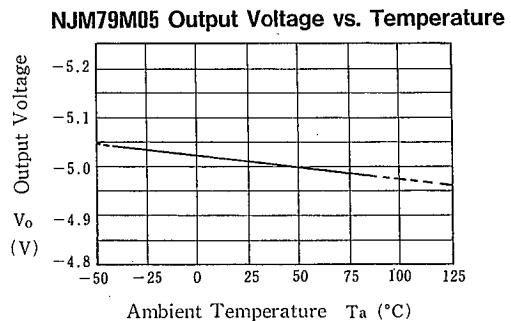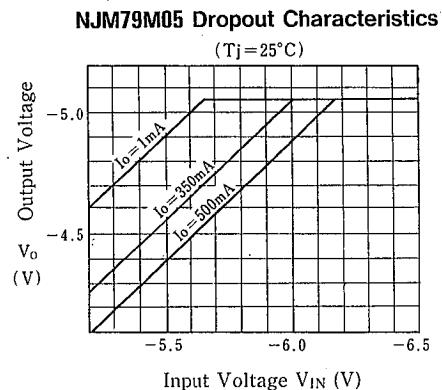**■ TYPICAL CHARACTERISTICS**

## MEMO

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.