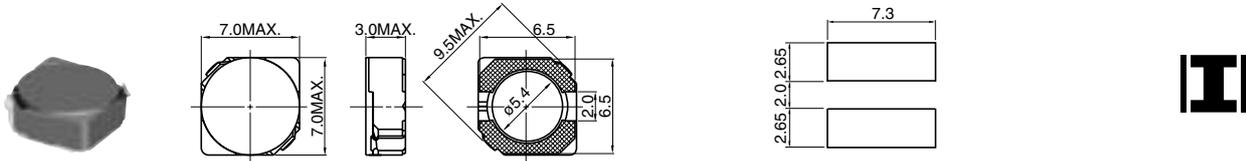


SHIELDED TYPE

CDRH6D28

Outline

SMT type power inductors whereby the electrode is attached to the ferrite core directly. They are also magnetically shielded to prevent noise radiation.

Dimensions (mm)
LAND PATTERNS(mm)
CONSTRUCTION


(3.0 μ H – 100 μ H)

◆ TYPE CDRH6D28

Parts No.	Inductance	D.C.R. (Ω) (Max) Typical / Rated D. C. Current (A)	Parts No.	Inductance	D.C.R. (Ω) (Max) Typical / Rated D. C. Current (A)
2R0	2.0 μ H		270	27 μ H	0.142 (0.105) / 1.05
2R5	2.5 μ H		330	33 μ H	0.165 (0.122) / 0.97
3R0	3.0 μ H	24m (18m) / 3.00	390	39 μ H	0.210 (0.156) / 0.86
3R3	3.3 μ H		470	47 μ H	0.238 (0.176) / 0.80
3R9	3.9 μ H	27m (20m) / 2.60	560	56 μ H	0.277 (0.205) / 0.73
4R0	4.0 μ H		680	68 μ H	0.304 (0.225) / 0.65
4R7	4.7 μ H		820	82 μ H	0.390 (0.290) / 0.60
5R0	5.0 μ H	31m (23m) / 2.40	101	100 μ H	0.535 (0.397) / 0.54
6R0	6.0 μ H	35m (26m) / 2.25	121	120 μ H	
6R2	6.2 μ H		151	150 μ H	
6R8	6.8 μ H		181	181 μ H	
7R3	7.3 μ H	54m (40m) / 2.10	221	220 μ H	
7R4	7.4 μ H		271	270 μ H	
8R0	8.0 μ H		331	330 μ H	
8R6	8.6 μ H	58m (43m) / 1.85	391	390 μ H	
8R7	8.7 μ H		471	470 μ H	
100	10 μ H	65m (48m) / 1.70	561	560 μ H	
120	12 μ H	70m (52m) / 1.55	681	680 μ H	
150	15 μ H	84m (62m) / 1.40	821	820 μ H	
180	18 μ H	95m (70m) / 1.32	102	1,000 μ H	
220	22 μ H	0.128 (95m) / 1.20			

Measuring Freq. (L)
CDRH6D28 10kHz

Tolerance of Inductance
CDRH6D28 \pm 30% (N)

Rated D.C. Current

This rated current indicates the current when the inductance decreases to 65% of it's initial value or DC current when the temperature of coil is increased by 30°C.

Sales Contact

North America
1701 Golf Road, Tower 3
Suite 400, Rolling
Meadows, IL 60008, USA
Tel: (1) 847 545-6700
Fax: (1) 847 545-6720

Japan
Nihonbashi- ingyocho
2-Chome, Chuo-ku,
Tokyo, Japan
Tel: (81) 03 3667-3301
Fax: (81) 03 3667-3456

Hong Kong
14/F, Eastern Centre,
1065 King's Road, Quarry
Road, Hong Kong
Tel: (852) 2880-6688
Fax: (852) 2880-9596

Taiwan
No. 171, Futech Street,
Hsin-I, Taipei, Taiwan,
ROC
Tel: (886) 2 2726-2177
Fax: (886) 2 2728-2726

Singapore
996 Bendemeer
Road #04-05 to 06
Singapore 339944
Tel: (65) 2963-388
Fax: (65) 2963-390

Europe
Chaussee de Tervuren113A,
1160 Brussels
Belgium
Email:
europe.sales@hk.sumida.com