

GD4017B

5-STAGE JOHNSON COUNTER

DESCRIPTION — The 4017B is a 5-Stage Johnson Decade Counter with ten glitch free decoded active HIGH Outputs (O_0 – O_9), an active LOW Output from the most significant flip-flop ($\overline{O}_{5-9}$), active HIGH and active LOW Clock Inputs (CP_0 , $\overline{CP}_1$) and an overriding asynchronous Master Reset Input (MR).

The counter is advanced by either a LOW-to-HIGH transition at CP_0 while $\overline{CP}_1$ is LOW or a HIGH-to-LOW transition at $\overline{CP}_1$ while CP_0 is HIGH (see Functional Truth Table). When cascading 4017B counters, the $\overline{O}_{5-9}$ output, which is LOW while the counter is in states 5, 6, 7, 8 and 9, can be used to drive the CP_0 input of the next 4017B.

A HIGH on the Master Reset Input (MR) resets the counter to zero ($O_0 = \overline{O}_{5-9} = \text{HIGH}$, O_1 – $O_9 = \text{LOW}$) independent of the Clock Inputs (CP_0 , $\overline{CP}_1$).

- TYPICAL COUNT FREQUENCY OF 13.8 MHz AT $V_{DD} = 10\text{ V}$
- ACTIVE HIGH DECODED OUTPUTS
- TRIGGERS ON EITHER A HIGH-TO-LOW OR LOW-TO-HIGH TRANSITION
- CASCADABLE

PIN NAMES


CP_0	Clock Input (L→H Triggered)
$\overline{CP}_1$	Clock Input (H→L Triggered)
MR	Master Reset Input
O_0 – O_9	Decoded Outputs
$\overline{O}_{5-9}$	Carry Output (Active LOW)

FUNCTIONAL TRUTH TABLE

MR	CP_0	$\overline{CP}_1$	OPERATION
H	X	X	$O_0 = \overline{O}_{5-9} = \text{H}; O_1 - O_9 = \text{L}$
L	H	H→L	Counter Advances
L	L→H	L	Counter Advances
L	L	X	No Change
L	X	H	No Change
L	H	L→H	No Change
L	H→L	L	No Change


H = HIGH Level
L = LOW Level
L→H = LOW-to-HIGH Transition
H→L = HIGH-to-LOW Transition
X = Don't Care

LOGIC SYMBOL




$V_{DD} = \text{Pin } 16$
 $V_{SS} = \text{Pin } 8$

CONNECTION DIAGRAM DIP (TOP VIEW)



NOTE:
The SO Package has the same pinouts (Connection Diagram) as the Dual In-line Package.

LOGIC DIAGRAM

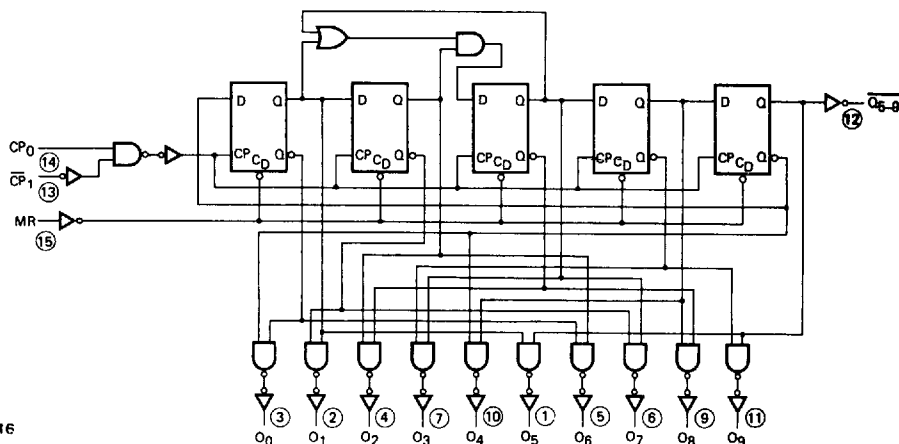

$V_{DD} = \text{Pin } 16$
 $V_{SS} = \text{Pin } 8$
○ = Pin Number

DC CHARACTERISTICS: V_{DD} as shown, $V_{SS} = 0$ V (See Note 1)

SYMBOL	PARAMETER		LIMITS									UNITS	TEMP	TEST CONDITIONS
			V _{DD} = 5 V			V _{DD} = 10 V			V _{DD} = 15 V					
			MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX			
I _{DD}	Quiescent Power Supply Current	XC			20			40			80	μA	MIN, 25°C	All inputs at 0 V or V _{DD}
					150			300			600		MAX	
	XM			5			10			20	μA	MIN, 25°C		
					150			300			600		MAX	


AC CHARACTERISTICS AND SET-UP REQUIREMENTS: V_{DD} as shown, $V_{SS} = 0$ V, $T_A = 25^\circ\text{C}$ (See Note 2)

SYMBOL	PARAMETER	LIMITS									UNITS	TEST CONDITIONS
		V _{DD} = 5 V			V _{DD} = 10 V			V _{DD} = 15 V				
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX		
t _{PLH}	Propagation Delay, CP ₀ or CP ₁ to O _n		278	700		114	285		82	228	ns	C _L = 50 pF, R _L = 200 kΩ Input Transition Times ≤ 20 ns
t _{PHL}			226	550		94	240		67	192	ns	
t _{PLH}	Propagation Delay, CP ₀ or CP ₁ to Q _{5-g}		205	525		87	225		63	180	ns	
t _{PHL}			261	650		105	250		73	200	ns	
t _{PHL}	Propagation Delay, MR to O _n		170	430		80	175		52	140	ns	
t _{PLH}	Propagation Delay, MR to Q _{5-g}		125	300		65	130		40	104	ns	
t _{TLH}	Output Transition Time		59	135		31	70		23	45	ns	
t _{THL}			63	135		26	70		19	45	ns	
t _{wCP}	Min. CP ₀ or CP ₁ Pulse Width	200	85		70	37		56	28		ns	
t _{wMR}	Minimum MR Pulse Width	130	52		55	22		44	18		ns	
t _{rec}	MR Recovery Time	50	16		25	6		20	3		ns	
t _h	Hold Time, CP ₀ to CP ₁	200	90		90	39		72	26		ns	
t _h	Hold Time, CP ₁ to CP ₀	200	89		90	39		72	22		ns	
f _{MAX}	Input Count Frequency (Note 3)	2.5	5.8		7	13.8		8	16		MHz	


NOTES:

1. Additional DC Characteristics are listed in this section under 4000B Series CMOS Family Characteristics.
2. Propagation Delays and Output Transition Times are graphically described in this section under 4000B Series CMOS Family Characteristics.
3. For f_{MAX} , input rise and fall times are greater than or equal to 5 ns and less than or equal to 20 ns.
4. It is recommended that input rise and fall times to either Clock Input (CP_0 or CP_1) be less than 15 μ s at $V_{DD} = 5$ V, 4 μ s at $V_{DD} = 10$ V, and 3 μ s at $V_{DD} = 15$ V.

SWITCHING WAVEFORMS

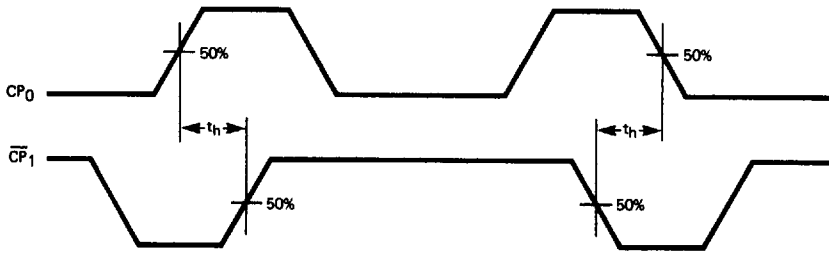HOLD TIMES, CP_0 TO $\overline{CP}_1$ AND $\overline{CP}_1$ TO CP_0

Hold Times are shown as positive values, but may be specified as negative values.

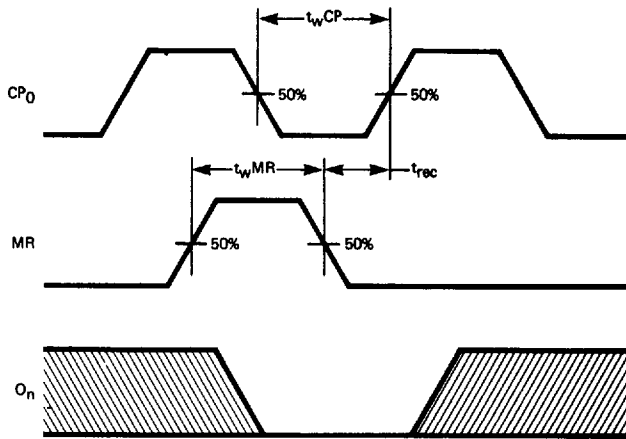MINIMUM PULSE WIDTHS FOR
CP AND MR AND RECOVERY TIME FOR MR

CONDITIONS: $\overline{CP}_1$ = LOW while CP_0 is triggered on a LOW-to-HIGH transition. t_{wCP} and t_{rec} also apply when CP_0 = HIGH and $\overline{CP}_1$ is triggered on a HIGH-to-LOW transition.