

SHINDENGEN

Schottky Rectifiers (SBD)

Dual

D5SC4MR

40V 5A

FEATURES

T_j150

P_{RRSM} avalanche guaranteed

Fully Isolated Molding

APPLICATION

Switching power supply

DC/DC converter


Home Appliances, Office Equipment

Telecommunication

OUTLINE DIMENSIONS

Case : ITO-220

Unit:mm

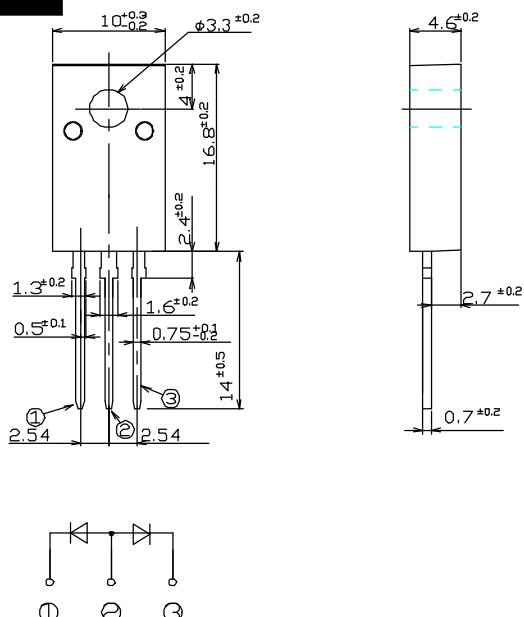

RATINGS


Absolute Maximum Ratings (If not specified T_c=25)


| Item | Symbol | Conditions | Ratings | Unit |
|---------------------------------------|-------------------|--|-----------|------|
| Storage Temperature | T _{stg} | | -40 ~ 150 | |
| Operating Junction Temperature | T _j | | 150 | |
| Maximum Reverse Voltage | V _{RM} | | 40 | V |
| Repetitive Peak Surge Reverse Voltage | V _{RRSM} | Pulse width 0.5ms, duty 1/40 | 45 | V |
| Average Rectified Forward Current | I _o | 50Hz sine wave, R-load, Rating for each diode I _o /2, T _c =136 | 5 | A |
| Peak Surge Forward Current | I _{FSM} | 50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =125 | 50 | A |
| Repetitive Peak Surge Reverse Power | P _{RRSM} | Pulse width 10 μs, Rating of per diode, T _j =25 | 330 | W |
| Dielectric Strength | V _{dis} | Terminals to case, AC 1 minute | 1.5 | kV |
| Mounting Torque | T _{OR} | (Recommended torque 0.3N·m) | 0.5 | N·m |

Electrical Characteristics (If not specified T_c=25)

| Item | Symbol | Conditions | Ratings | Unit |
|----------------------|----------------|--|----------|------|
| Forward Voltage | V _F | I _F =2.5A, Pulse measurement, Rating of per diode | Max.0.55 | V |
| Reverse Current | I _R | V _R =V _{RM} , Pulse measurement, Rating of per diode | Max.2.5 | mA |
| Junction Capacitance | C _j | f=1MHz, V _R =10V, Rating of per diode | Typ.116 | pF |
| Thermal Resistance | j _C | junction to case | Max.3.3 | /W |


D5SC4MR Forward Voltage

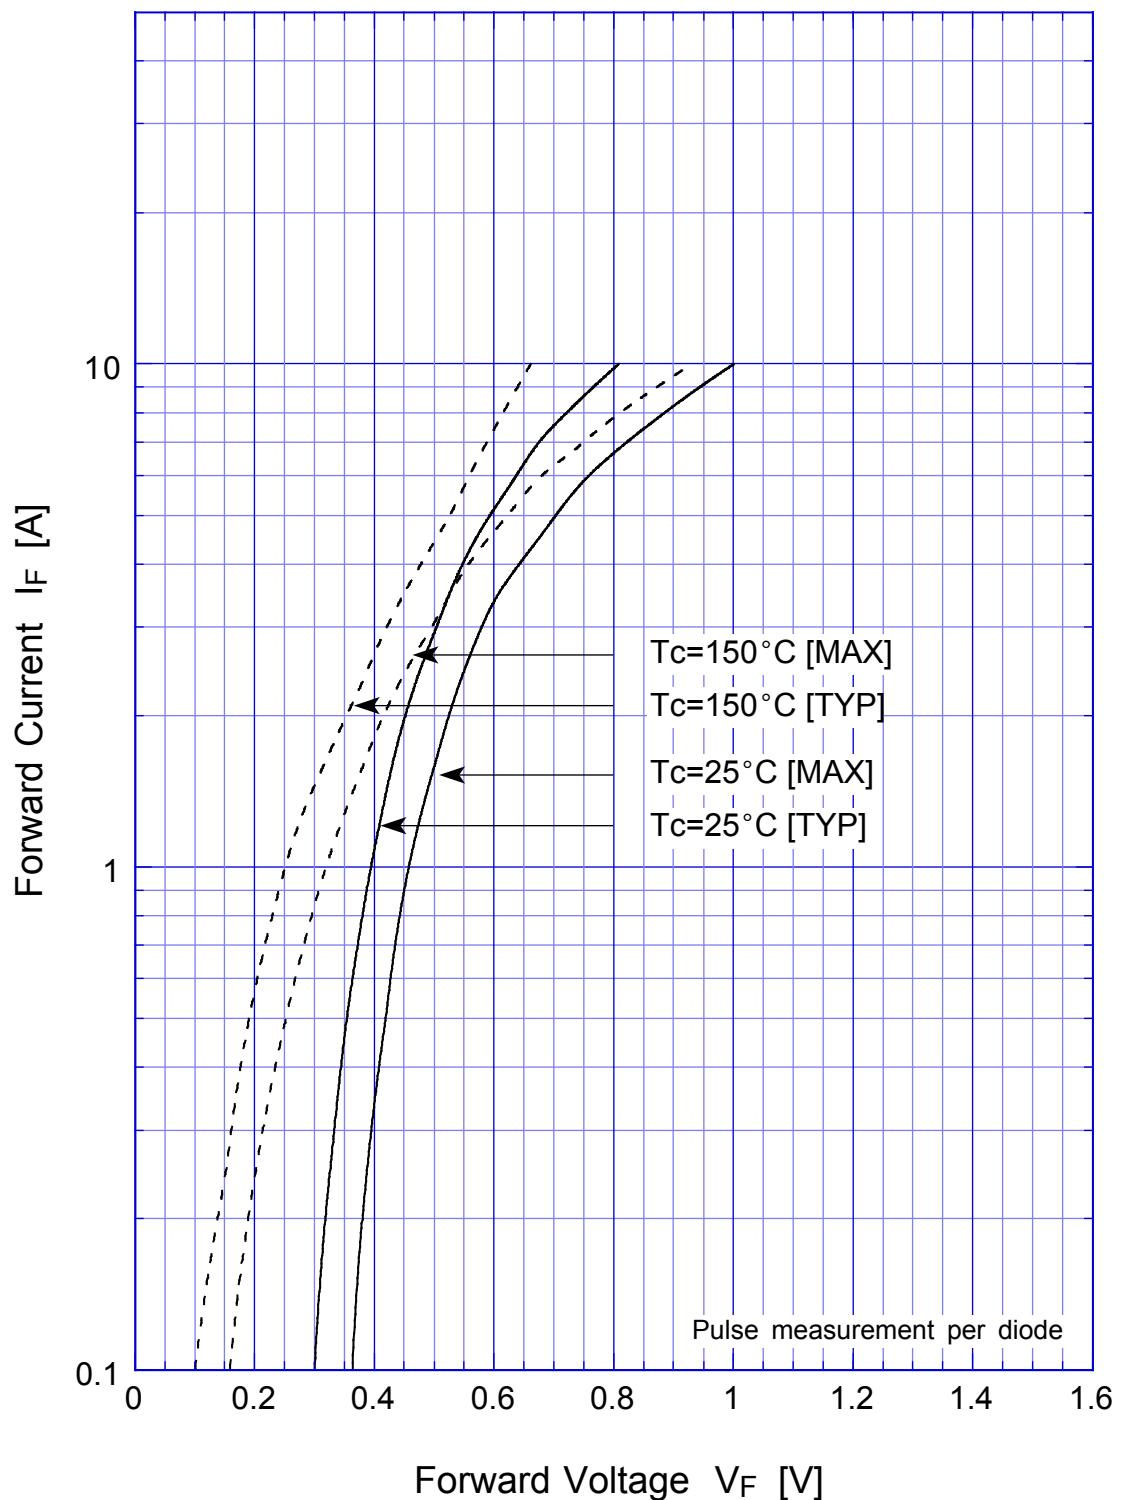

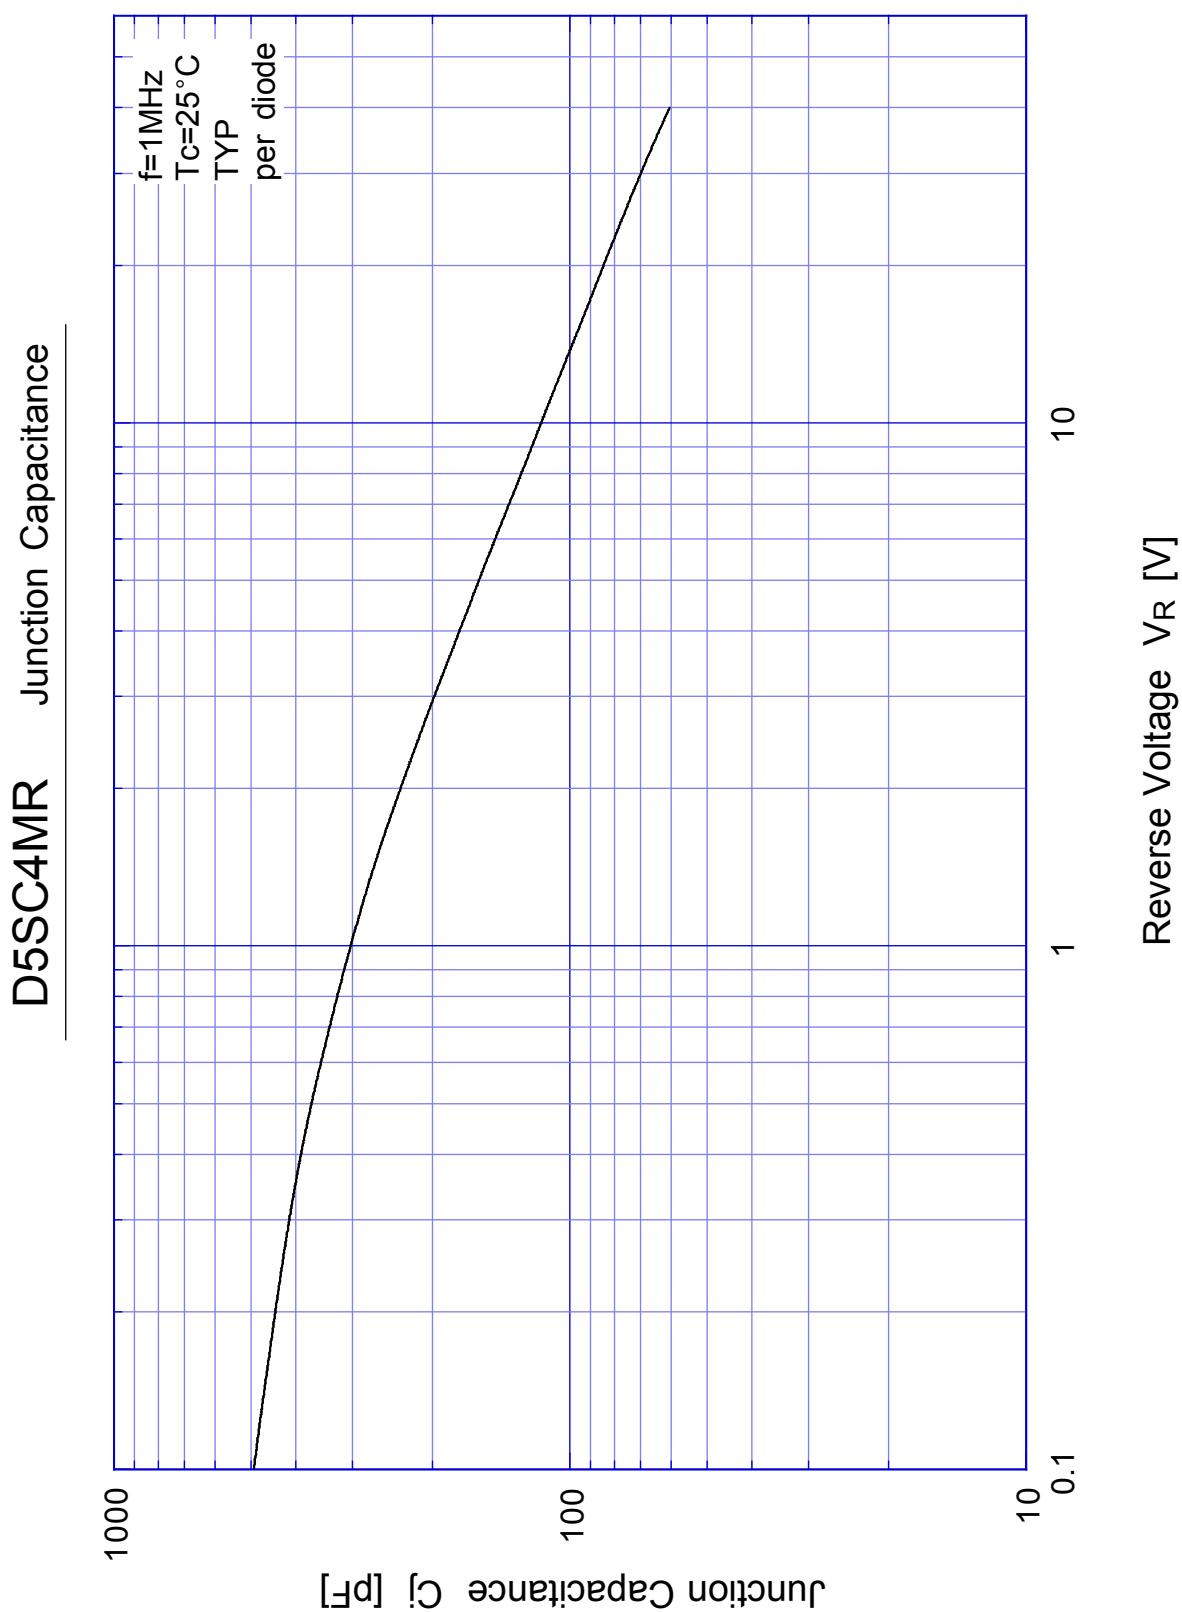


D5SC4MR


Reverse Current

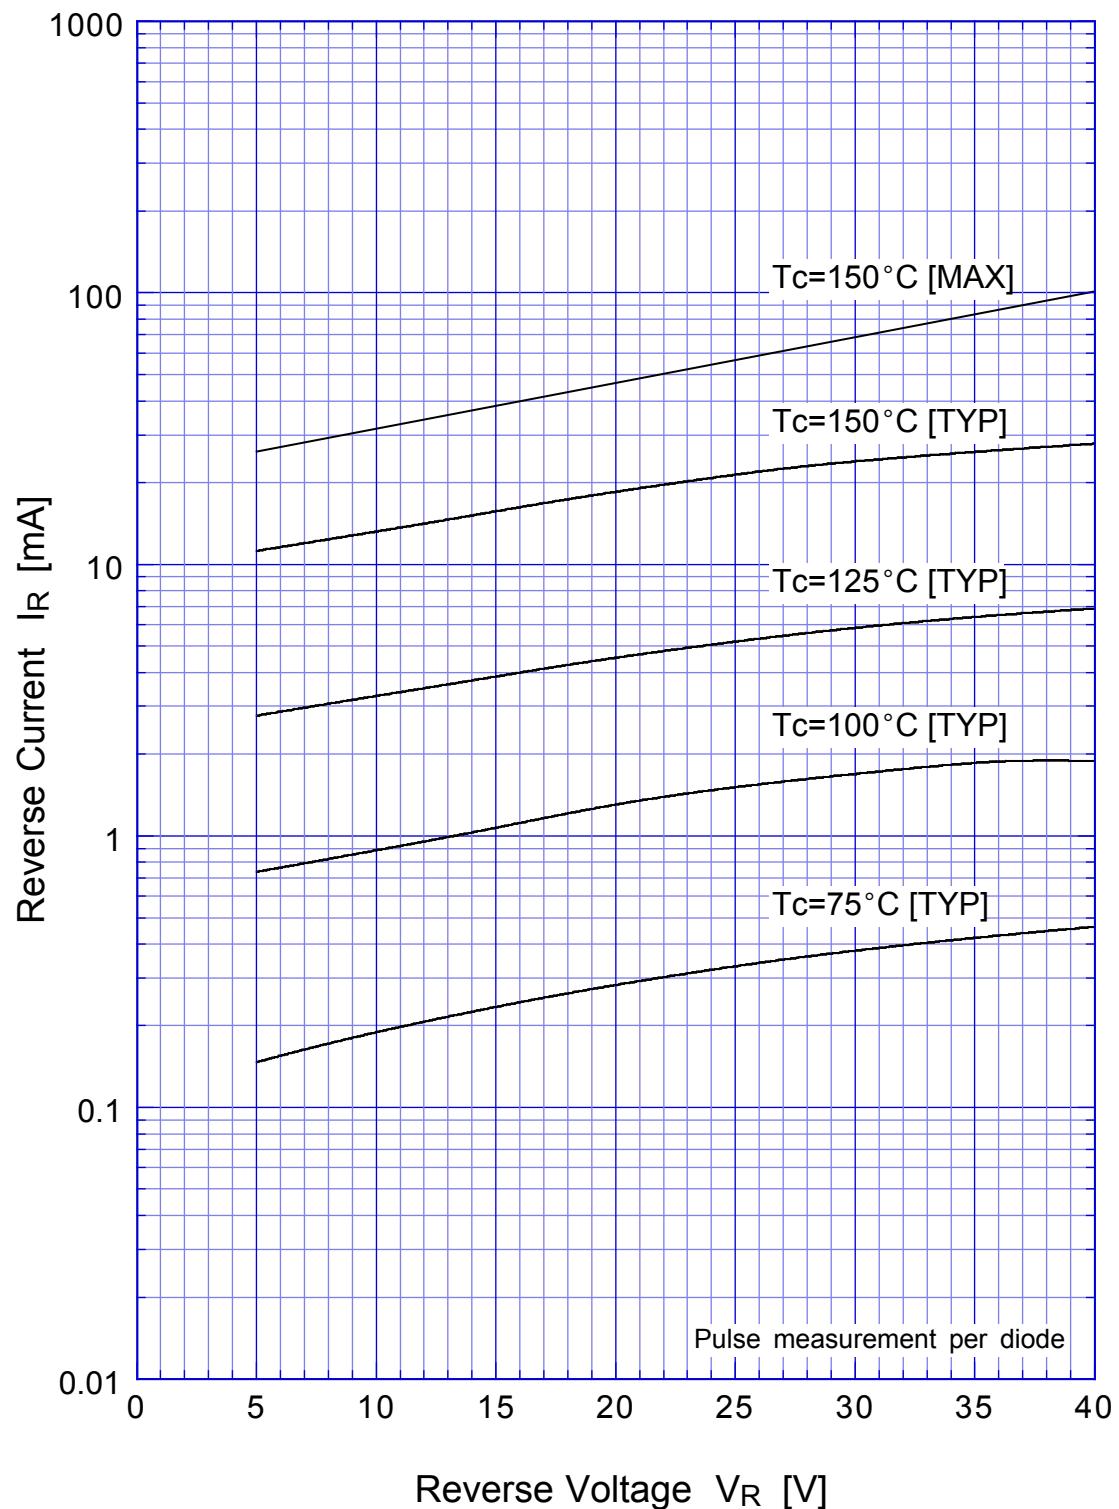



D5SC4MR Reverse Power Dissipation


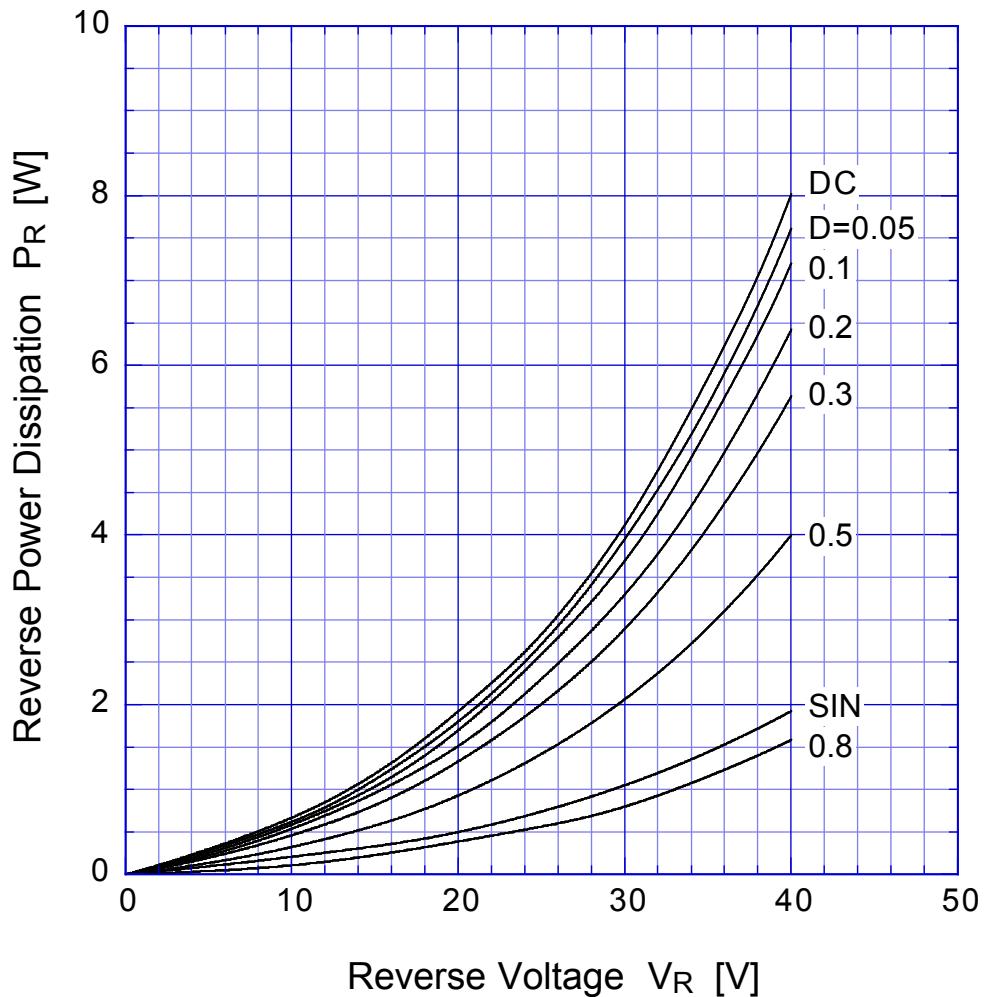




$T_j = 150^\circ\text{C}$

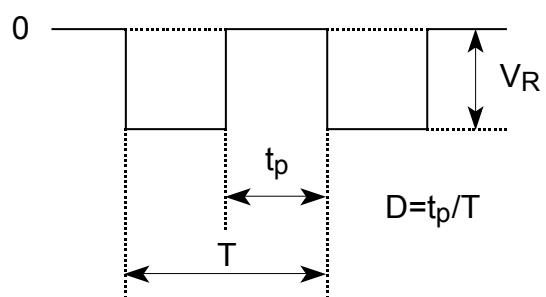


D5SC4MR Forward Power Dissipation

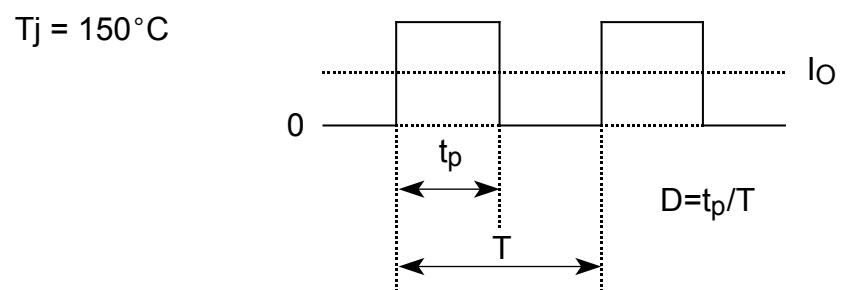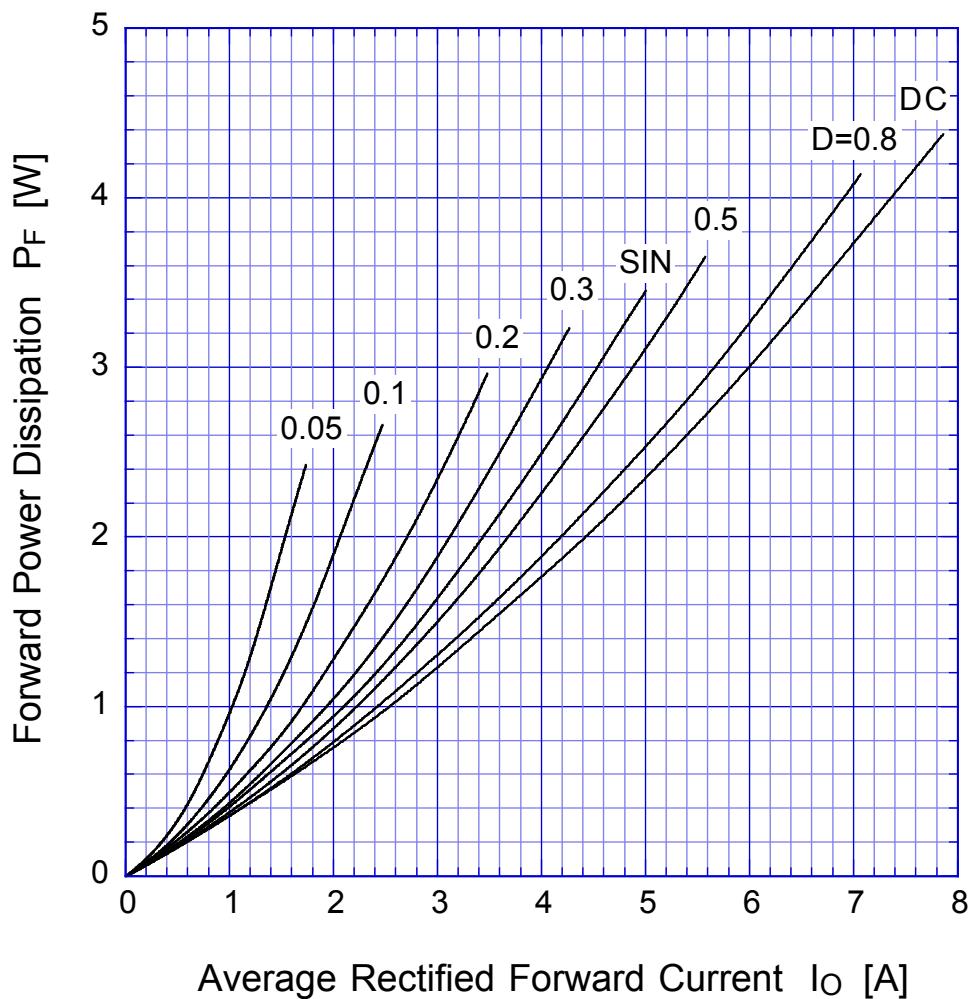

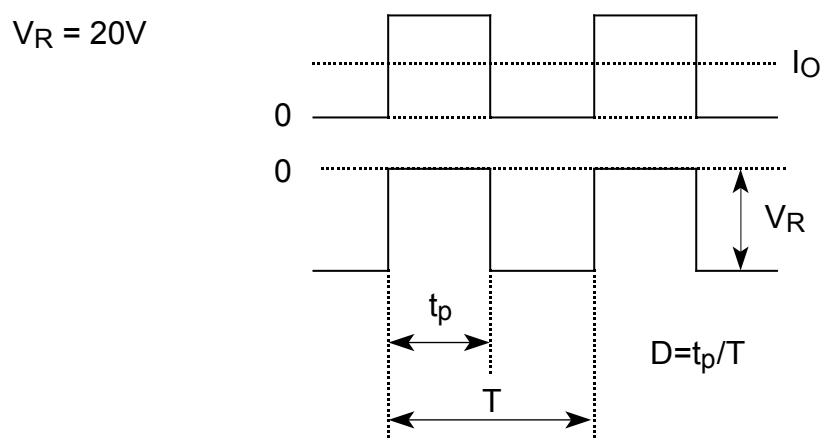
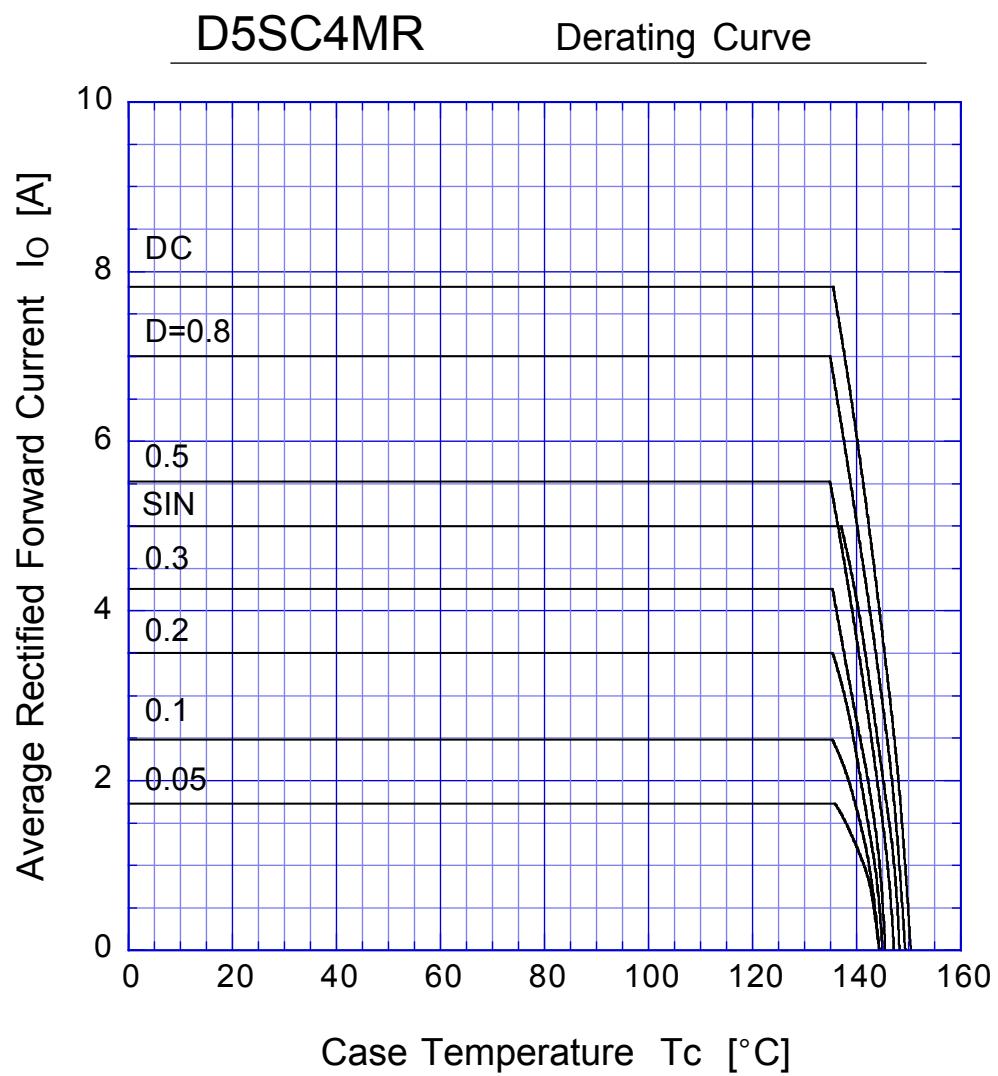


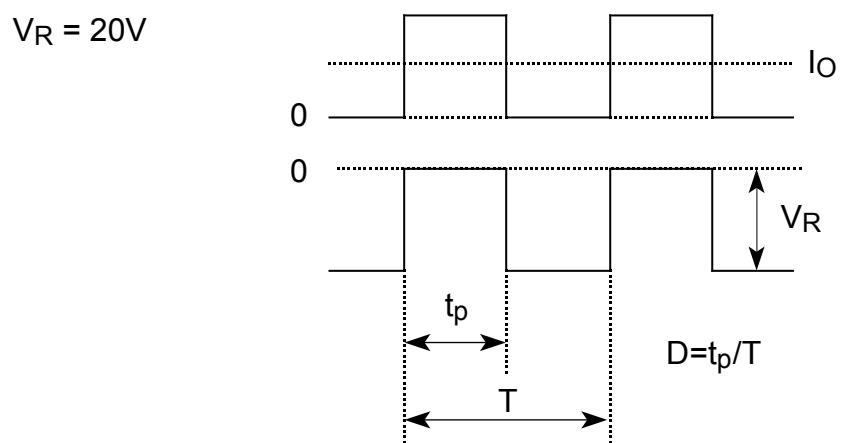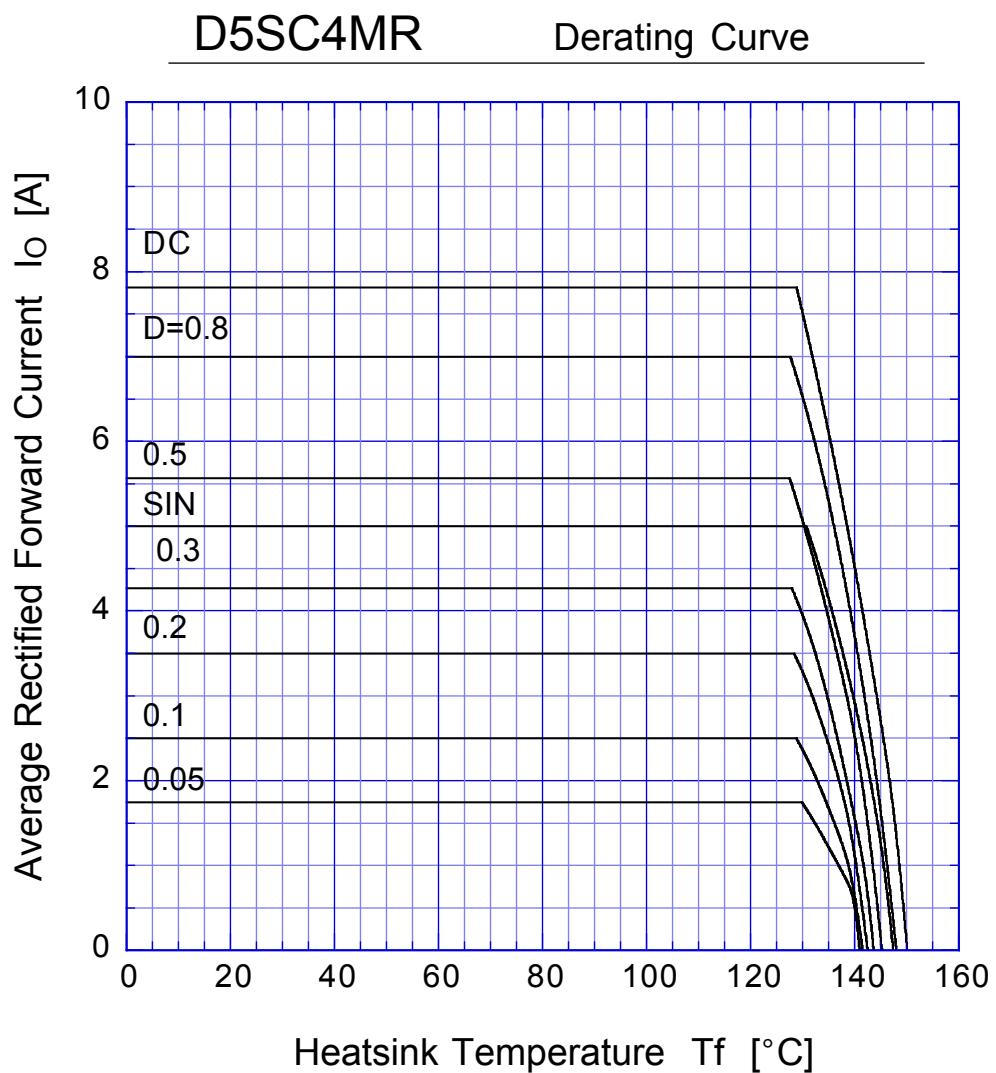

D5SC4MR Peak Surge Forward Capability

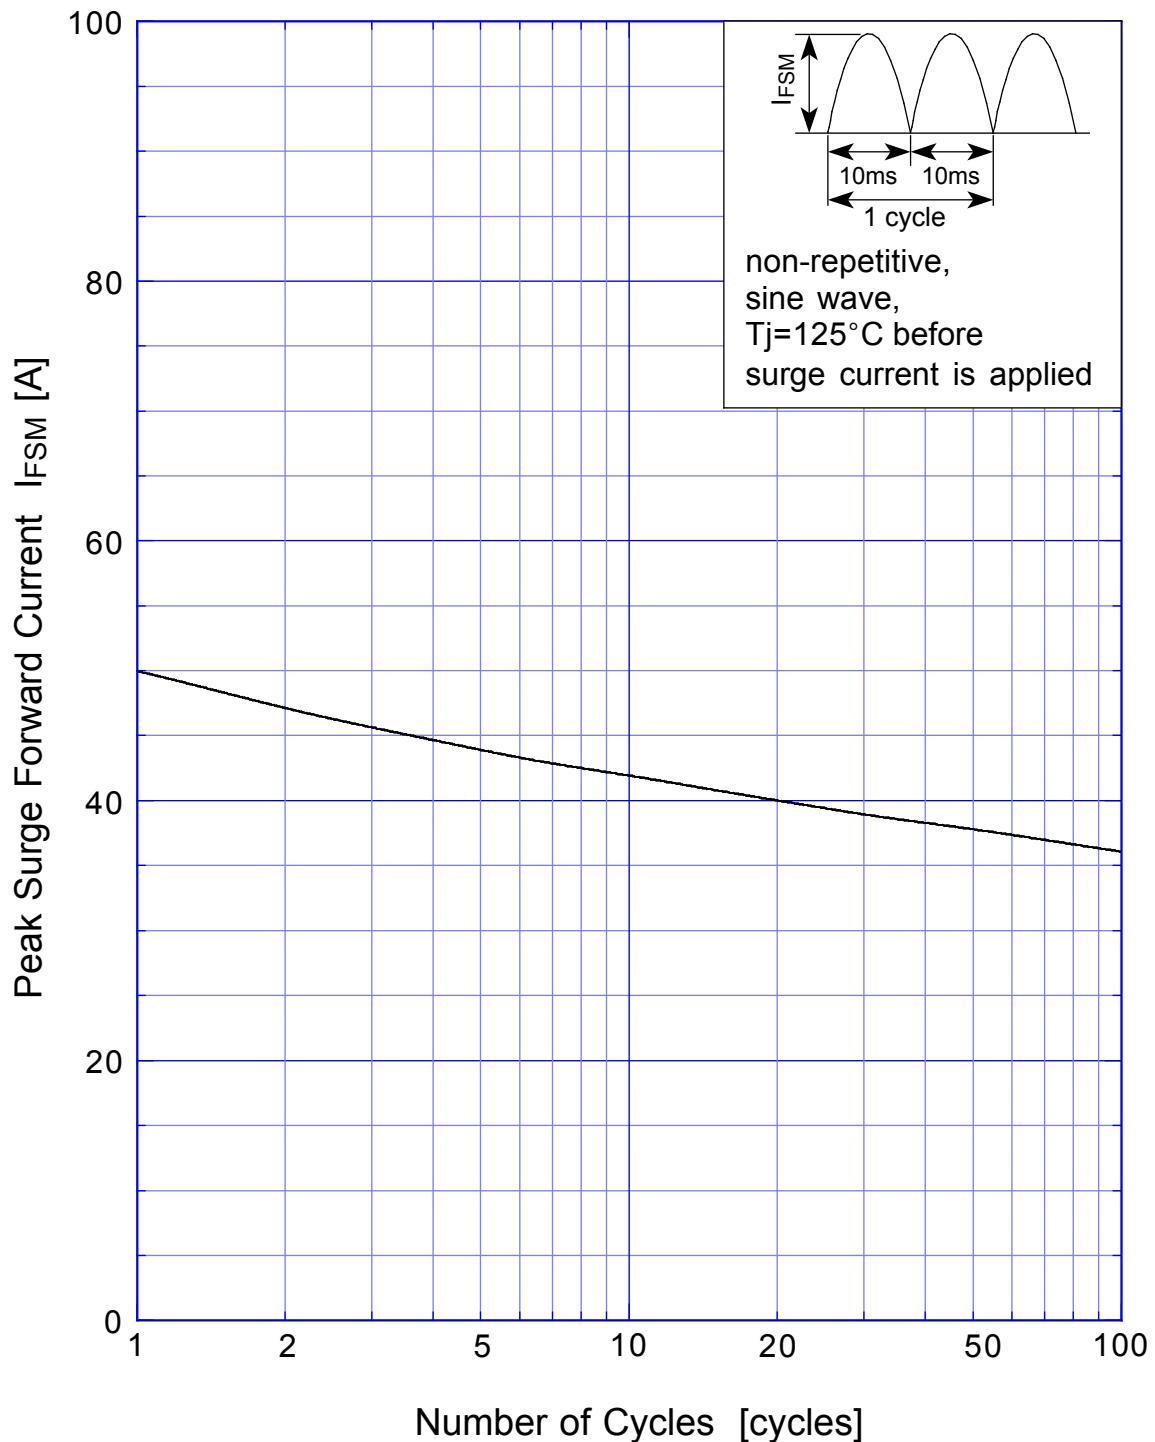

SBD Repetitive Surge Reverse Power Derating Curve

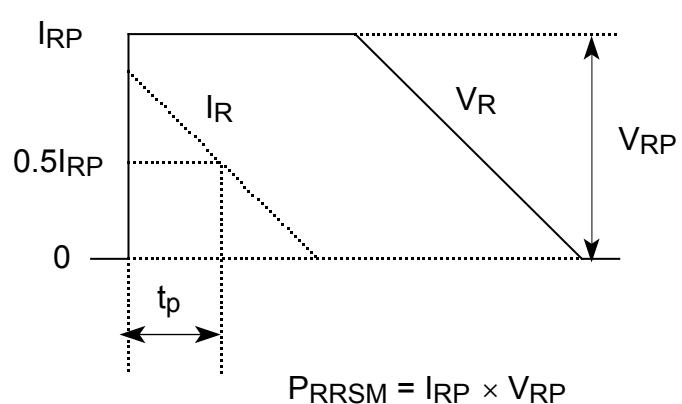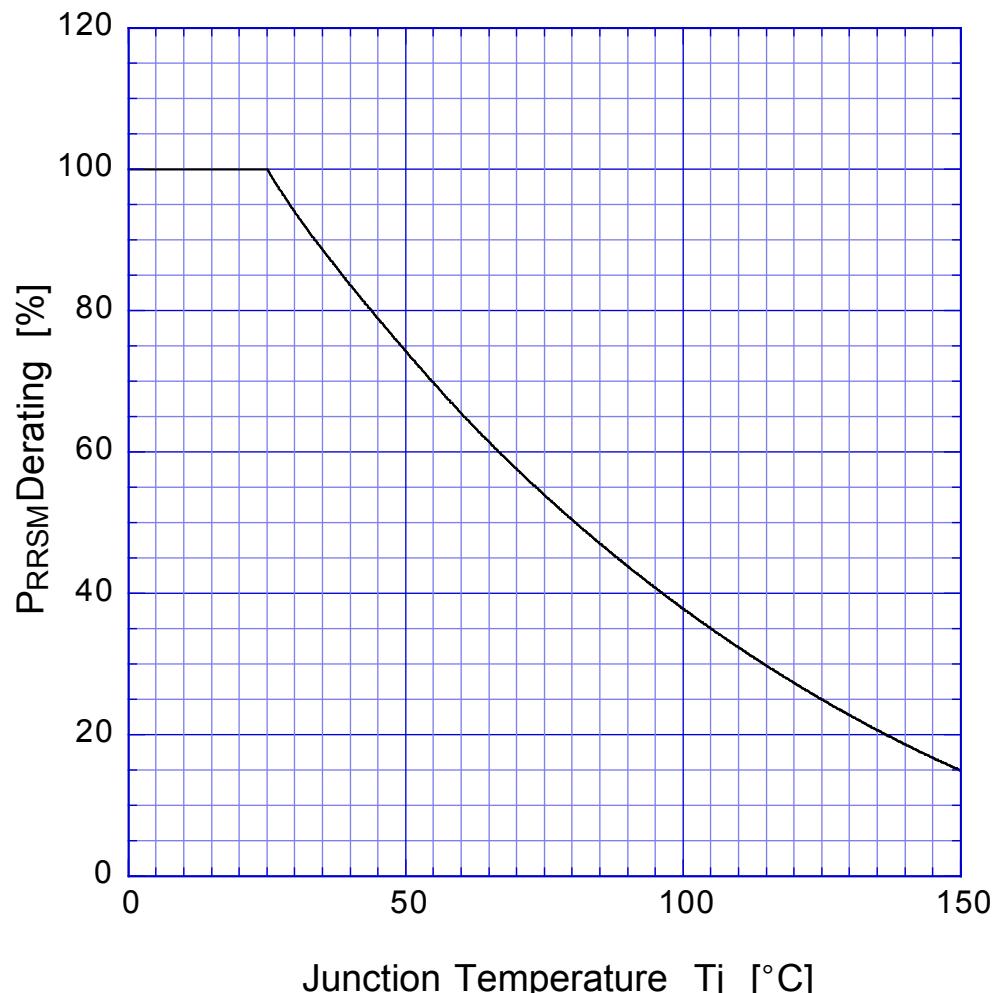

SBD Repetitive Surge Reverse Power Capability

