

KR Electronics

General Description

KR 2786-3 is a 130 MHz differential bandpass filter. The filter has a typical 3 dB bandwidth of 6.5 MHz and is designed for a balanced source and load impedance of 100 Ω. Other passband frequencies are available. Please consult the factory.



Features

- 130 MHz Center Frequency
- DIP Package
- 100 Ω Differential Source and Load

Typical Performance

Passband Amplitude
(1 dB/div)

Overall Response
(10 dB/div)

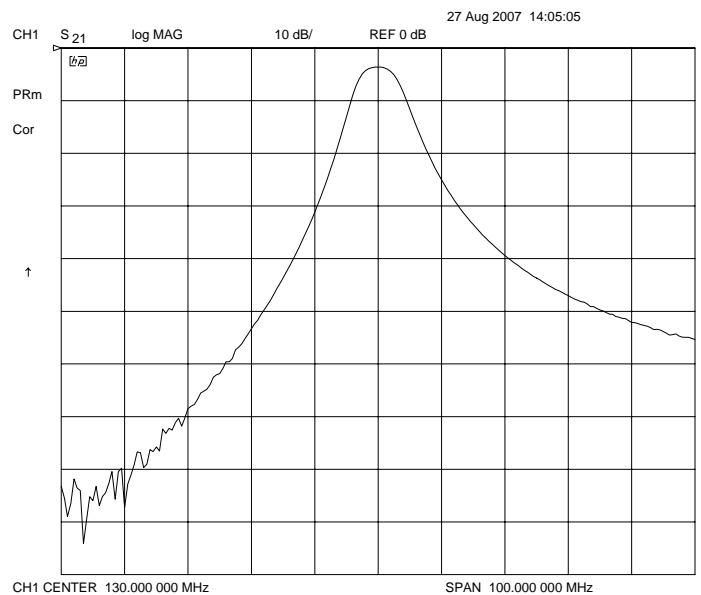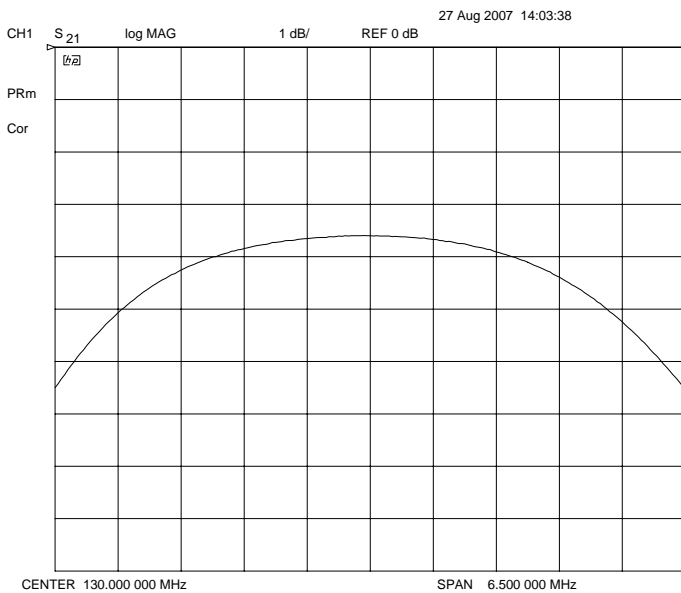

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2786-3

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	130 MHz
Insertion Loss	4 dB typical
3 dB Bandwidth	6.5 MHz Typical
40 dB Bandwidth	40 MHz Typical
Source and Load	100 Ω Differential

Physical Dimensions

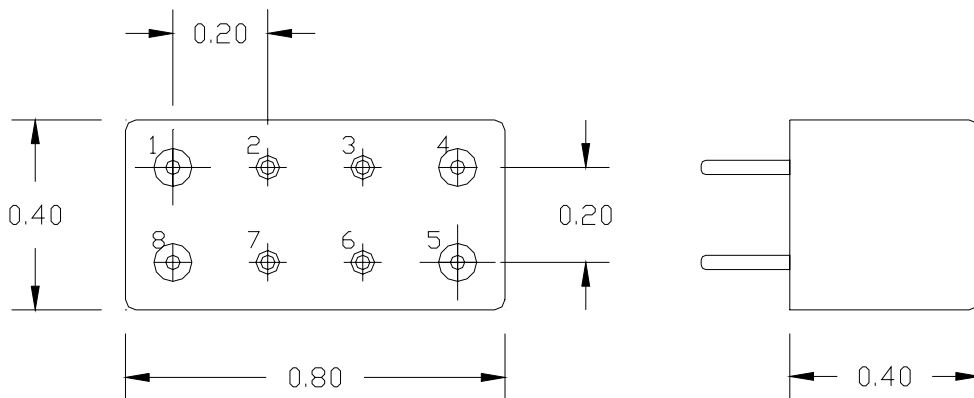

NOTES:

1. FILTER IS BI-DIRECTIONAL
2. ALL PINS ARE 0.030" DIA
3. DIMENSIONS ARE IN INCHES

- Pin 1—IN
Pin 8—IN
Pin 4—OUT
Pin 5—OUT

Connect all remaining pins to GND (also connected to Case)