

## GN62FP

### CMOS Positive Voltage Regulator

#### Description

The GN62FP series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The GN62FP consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient response to load variations have improved in comparison to the existing series.


#### Features

- Maximum Output Current: 250mA (within max. power dissipation,  $V_{out}=5.0V$ )
- Output Voltage Range: 1.5V ~ 6V in 0.1V increments
- Low Power Consumption: Typ. 2.0uA @  $V_{OUT}=5.0V$
- Output Voltage Temperature Characteristics: Typ.  $\pm 100\text{ppm}/^\circ\text{C}$
- Input Stability: Typ. 0.2%/V
- Small Input-Output Differential:  $I_{OUT}=100\text{mA}$  @  $V_{OUT}=5.0V$  with a 0.12V differential
- Highly Accurate: Output voltage  $\pm 2\%$


#### Applications

- Battery Powered Equipment
- Palmtops
- Portable Cameras and Video Recorders
- Reference Voltage Source

#### Package Dimensions

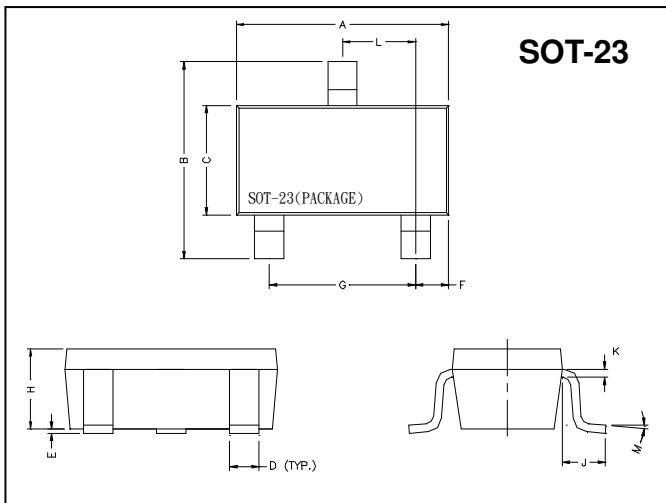


#### Marking :

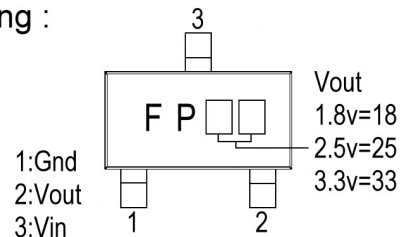


| REF. | Millimeter |      | REF. | Millimeter |      |
|------|------------|------|------|------------|------|
|      | Min.       | Max. |      | Min.       | Max. |
| A    | 2.70       | 3.10 | G    | 1.90       | REF. |
| B    | 2.40       | 2.80 | H    | 1.00       | 1.30 |
| C    | 1.40       | 1.60 | K    | 0.10       | 0.20 |
| D    | 0.35       | 0.50 | J    | 0.40       | -    |
| E    | 0          | 0.10 | L    | 0.85       | 1.15 |
| F    | 0.45       | 0.55 | M    | 0°         | 10°  |

#### Typical Application Circuit

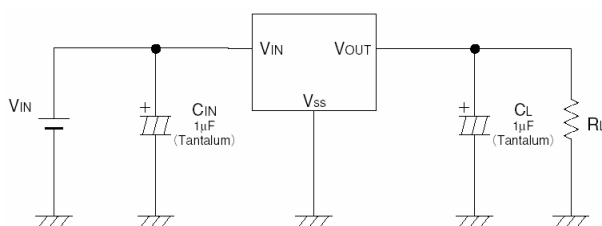

#### Block Diagram

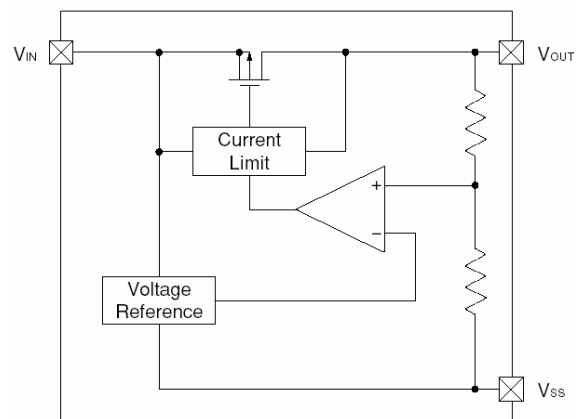

**Absolute Maximum Ratings Ta=25°C**

| Parameter                          | Symbol           | Ratings                                    | Unit |
|------------------------------------|------------------|--|------|
| Input Voltage                      | V <sub>IN</sub>  | 12   | V    |
| Output Current                     | I <sub>OUT</sub> | 500  | mA   |
| Output Voltage                     | V <sub>OUT</sub> | V <sub>SS</sub> -0.3 ~V <sub>IN</sub> +0.3 | V    |
| Operating Ambient Temperature      | Topr             | -40 ~ +85                                  | °C   |
| Storage Temperature                | Tstg             | -40 ~ +125                                 | °C   |
| Continuous Total Power Dissipation | PD               | 150  | mW   |

**Electrical Characteristics Ta=25°C****GN62FP-50 V<sub>OUT</sub> (T) =5.0V (Note1)**

| Parameter  | Symbol  | Condition  | Min   | TYP   | Max   | Unit   |
|--|---|--|-------|-------|-------|--------|
| Output Voltage                                   | V <sub>OUT</sub> (E)<br>(Note2)                       | V <sub>IN</sub> =6.0V, I <sub>OUT</sub> =40mA        | 4.900 | 5.000 | 5.100 | V      |
| Max. Output Current                              | I <sub>OUT max</sub>                                  | V <sub>IN</sub> =6V, V <sub>OUT</sub> (E)≥4.5V       | 250   | -     | -     | mA     |
| Load Stability                                   | ΔV <sub>OUT</sub>                                     | V <sub>IN</sub> =6V, I <sub>OUT</sub> =1mA to 100mA  | -     | 40    | 80    | mV     |
| Input-Output<br>Voltage Differential (Note3)     | V <sub>dif1</sub>                                     | I <sub>OUT</sub> =100mA                              | -     | 120   | 300   | mV     |
|  | V <sub>dif2</sub>                                     | I <sub>OUT</sub> =200mA                              | -     | 380   | 600   |        |
| Supply Current                                   | I <sub>SS</sub>                                       | V <sub>IN</sub> =6V                                  | -     | 2.0   | 5.0   | μA     |
| Input Stability                                  | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$  | I <sub>OUT</sub> =40mA<br>V <sub>IN</sub> =6V to 10V | -     | 0.2   | 0.3   | %/V    |
| Input Voltage                                    | V <sub>IN</sub>                                       |  | -     | -     | 10    | V      |
| Output Voltage<br>Temperature<br>Characteristics | $\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$ | I <sub>OUT</sub> =40mA<br>-40°C ≤ Topr ≤ 85°C        | -     | ±100  | -     | ppm/°C |

Note 1: V<sub>OUT</sub> (T) =Specified Output Voltage.

2: V<sub>OUT</sub> (E) =Effective Output Voltage (i.e. the output voltage when "V<sub>OUT</sub> (T) +1.0V" is provided at the V<sub>IN</sub> pin while maintaining a certain I<sub>OUT</sub> value).

3: V<sub>dif</sub>=V<sub>IN</sub> (Note4) -V<sub>OUT</sub> (E)

4: V<sub>IN1</sub>=The input voltage at the time 98% of V<sub>OUT</sub> (E) is output (input voltage has been gradually reduced).

**GN62FP-40 V<sub>OUT</sub> (T) =4.0V (Note1)**

| Parameter  | Symbol  | Condition  | Min   | TYP   | Max   | Unit   |
|--|---|--|-------|-------|-------|--------|
| Output Voltage                                   | V <sub>OUT</sub> (E)<br>(Note2)                       | V <sub>IN</sub> =5.0V, I <sub>OUT</sub> =40mA        | 3.920 | 4.000 | 4.080 | V      |
| Max. Output Current                              | I <sub>OUT max</sub>                                  | V <sub>IN</sub> =5V, V <sub>OUT</sub> (E)≥3.6V       | 200   | -     | -     | mA     |
| Load Stability                                   | ΔV <sub>OUT</sub>                                     | V <sub>IN</sub> =5V, I <sub>OUT</sub> =1mA to 100mA  | -     | 45    | 90    | mV     |
| Input-Output<br>Voltage Differential (Note3)     | V <sub>dif1</sub>                                     | I <sub>OUT</sub> =100mA                              | -     | 170   | 330   | mV     |
|  | V <sub>dif2</sub>                                     | I <sub>OUT</sub> =200mA                              | -     | 400   | 630   |        |
| Supply Current                                   | I <sub>SS</sub>                                       | V <sub>IN</sub> =5V                                  | -     | 2.0   | 4.5   | μA     |
| Input Stability                                  | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$  | I <sub>OUT</sub> =40mA<br>V <sub>IN</sub> =5V to 10V | -     | 0.2   | 0.3   | %/V    |
| Input Voltage                                    | V <sub>IN</sub>                                       |  | -     | -     | 10    | V      |
| Output Voltage<br>Temperature<br>Characteristics | $\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$ | I <sub>OUT</sub> =40mA<br>-40°C ≤ Topr ≤ 85°C        | -     | ±100  | -     | ppm/°C |

**GN62FP-30 V<sub>OUT</sub> (T) =3.0V (Note1)**


| Parameter                                  | Symbol  | Condition   | Min   | TYP   | Max   | Unit   |
|--|---|---|-------|-------|-------|--------|
| Output Voltage                             | V <sub>OUT(E)</sub><br>(Note2)                        | V <sub>IN</sub> =4.0V, I <sub>OUT</sub> =40mA             | 2.940 | 3.000 | 3.060 | V      |
| Max. Output Current                        | I <sub>OUT max</sub>                                  | V <sub>IN</sub> =4V, V <sub>OUT(E)</sub> ≥2.7V            | 150   | -     | -     | mA     |
| Load Stability                             | ΔV <sub>OUT</sub>                                     | V <sub>IN</sub> =4V, I <sub>OUT</sub> =1mA to 80mA        | -     | 45    | 90    | mV     |
| Input-Output Voltage Differential (Note3)  | V <sub>dif1</sub>                                     | I <sub>OUT</sub> =80mA                                    | -     | 180   | 360   | mV     |
|  | V <sub>dif2</sub>                                     | I <sub>OUT</sub> =160mA                                   | -     | 400   | 700   |        |
| Supply Current                             | I <sub>SS</sub>                                       | V <sub>IN</sub> =4V                                       | -     | 2.0   | 4.5   | μA     |
| Input Stability                            | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$  | I <sub>OUT</sub> =40mA<br>V <sub>IN</sub> =4V to 10V      | -     | 0.2   | 0.3   | %/V    |
| Input Voltage                              | V <sub>IN</sub>                                       |   | -     | -     | 10    | V      |
| Output Voltage Temperature Characteristics | $\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$ | I <sub>OUT</sub> =40mA<br>-40°C ≤ T <sub>opr</sub> ≤ 85°C | -     | ±100  | -     | ppm/°C |

**GN62FP-20 V<sub>OUT</sub> (T) =2.0V (Note1)**


| Parameter                                  | Symbol  | Condition   | Min   | TYP   | Max   | Unit   |
|--|---|---|-------|-------|-------|--------|
| Output Voltage                             | V <sub>OUT(E)</sub><br>(Note2)                        | V <sub>IN</sub> =3.0V, I <sub>OUT</sub> =40mA             | 1.960 | 2.000 | 2.040 | V      |
| Max. Output Current                        | I <sub>OUT max</sub>                                  | V <sub>IN</sub> =3V, V <sub>OUT(E)</sub> ≥1.8V            | 100   | -     | -     | mA     |
| Load Stability                             | ΔV <sub>OUT</sub>                                     | V <sub>IN</sub> =3V, I <sub>OUT</sub> =1mA to 60mA        | -     | 45    | 90    | mV     |
| Input-Output Voltage Differential (Note3)  | V <sub>dif1</sub>                                     | I <sub>OUT</sub> =60mA                                    | -     | 180   | 360   | mV     |
|  | V <sub>dif2</sub>                                     | I <sub>OUT</sub> =120mA                                   | -     | 400   | 700   |        |
| Supply Current                             | I <sub>SS</sub>                                       | V <sub>IN</sub> =3V                                       | -     | 2.0   | 4.5   | μA     |
| Input Stability                            | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$  | I <sub>OUT</sub> =40mA<br>V <sub>IN</sub> =3V to 10V      | -     | 0.2   | 0.3   | %/V    |
| Input Voltage                              | V <sub>IN</sub>                                       |   | -     | -     | 10    | V      |
| Output Voltage Temperature Characteristics | $\frac{\Delta V_{OUT}}{\Delta T_{opr} \cdot V_{OUT}}$ | I <sub>OUT</sub> =40mA<br>-40°C ≤ T <sub>opr</sub> ≤ 85°C | -     | ±100  | -     | ppm/°C |

## Test Circuit

Circuit1




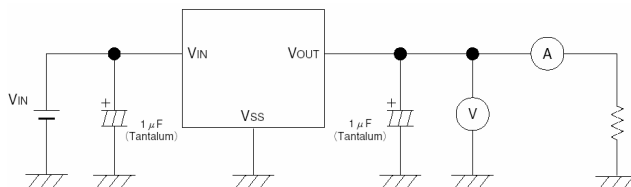


Circuit2




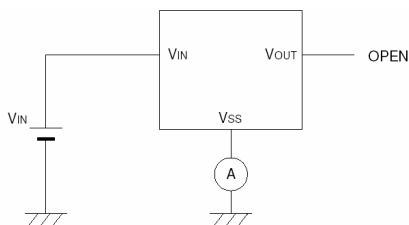


## Characteristics Curve





### (1) Output Voltage vs. Output Current

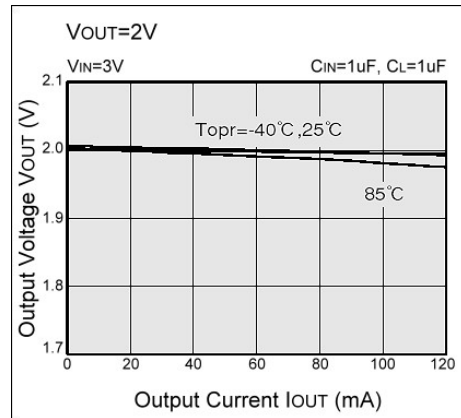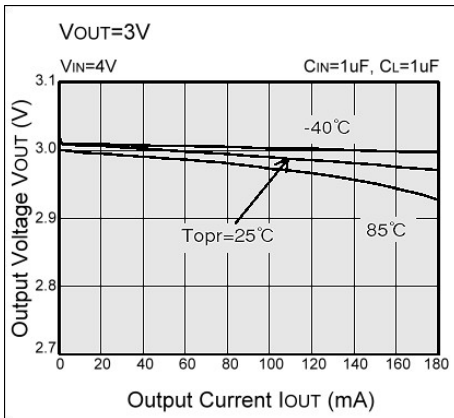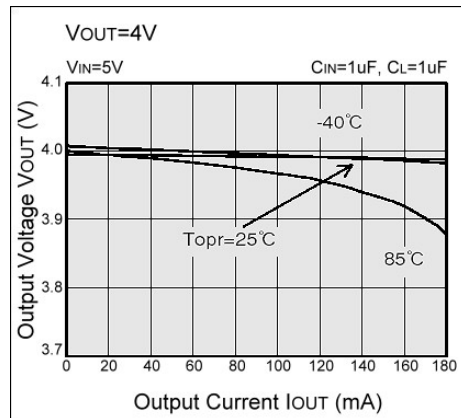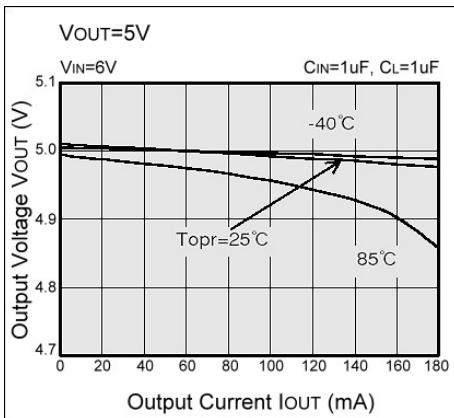





### (2) Output Voltage vs. Input Voltage

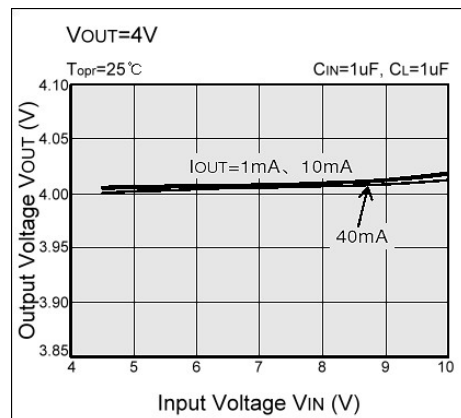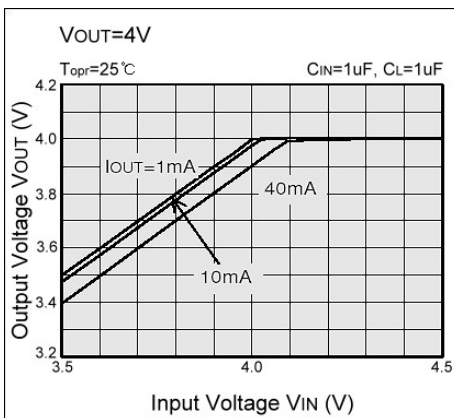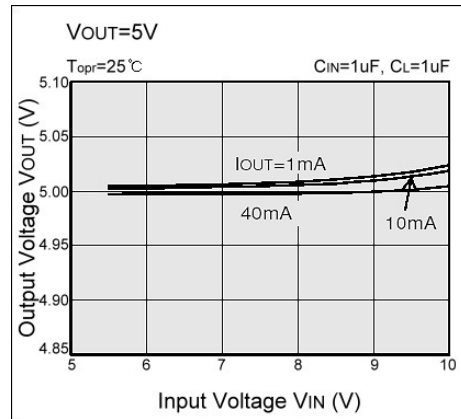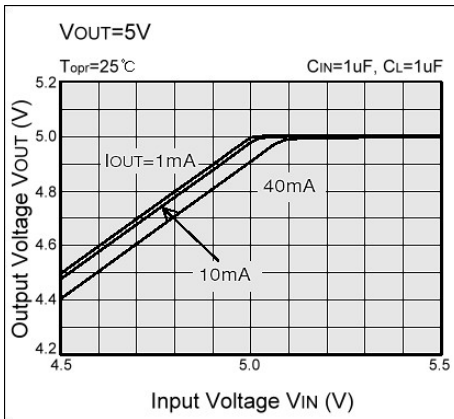





## (2) Output Voltage vs. Input Voltage

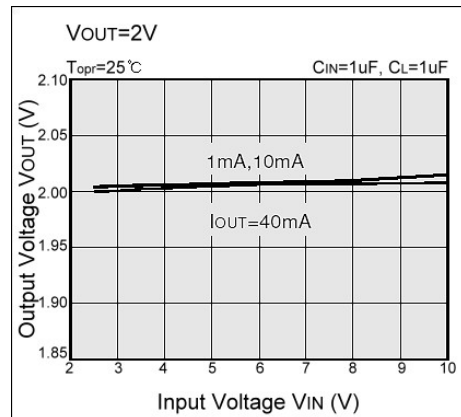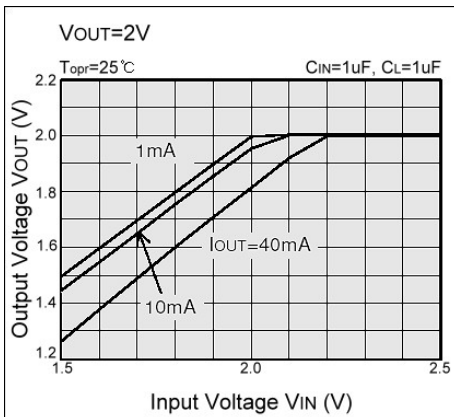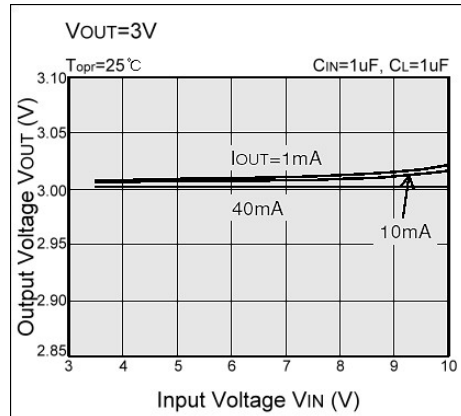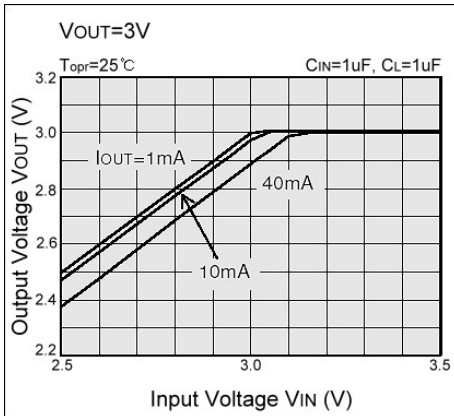





## (3) Input/Output Voltage Differential vs. Output Current

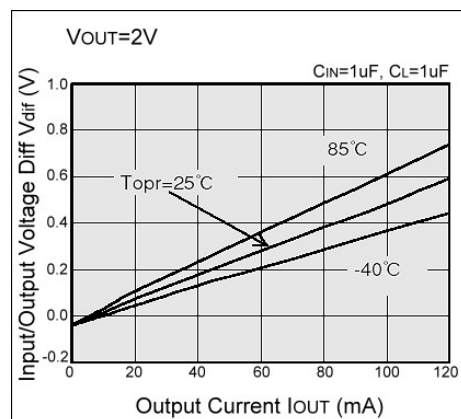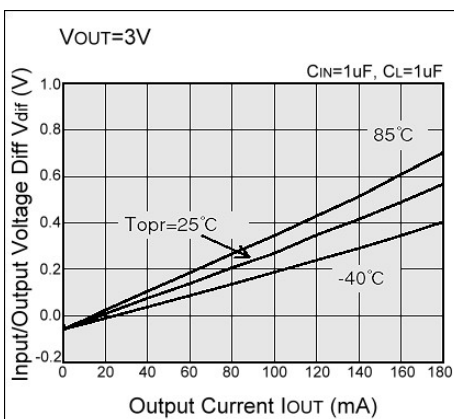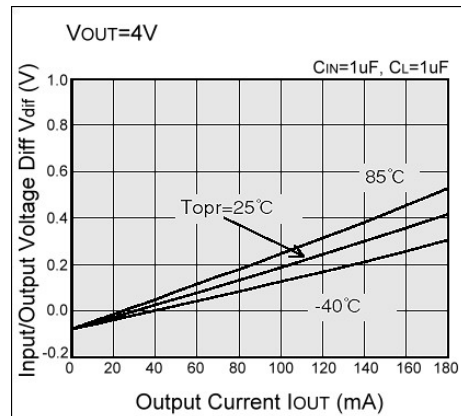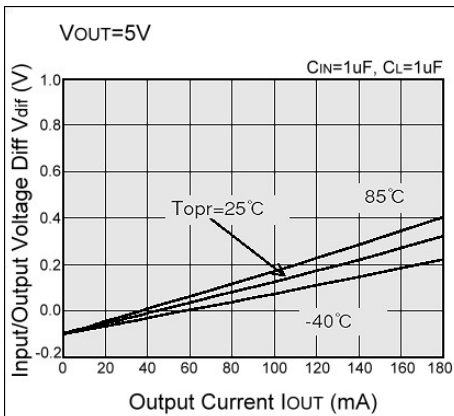





### (4) Supply Current vs. Input Voltage

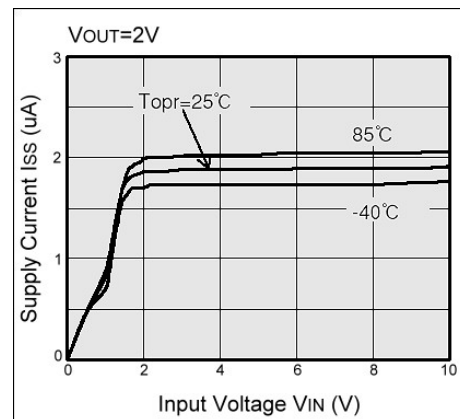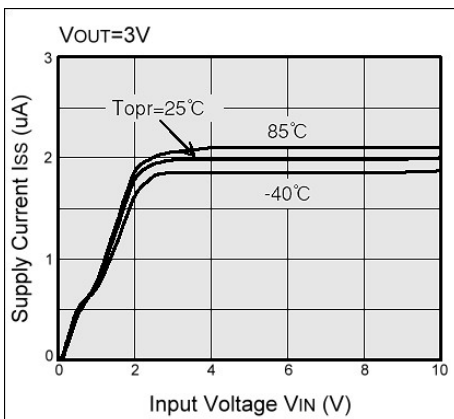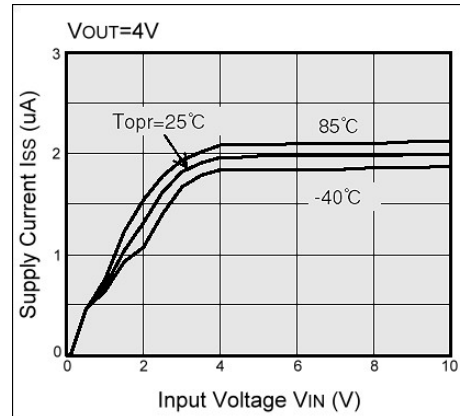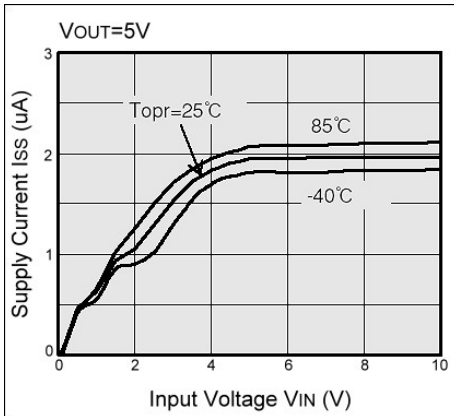

### (5) Supply Current vs. Ambient Temperature

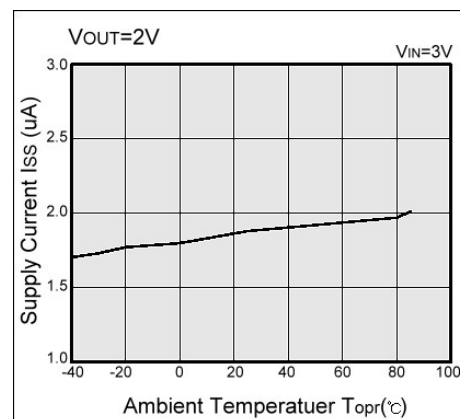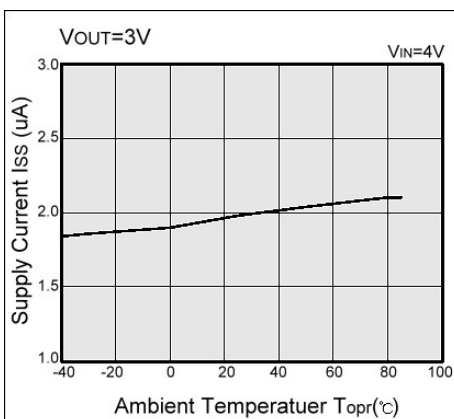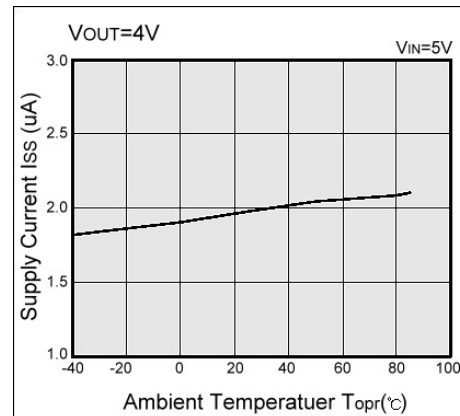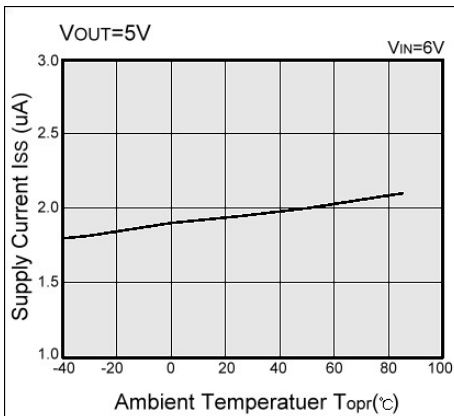

## (6) Output Voltage vs. Ambient Temperature

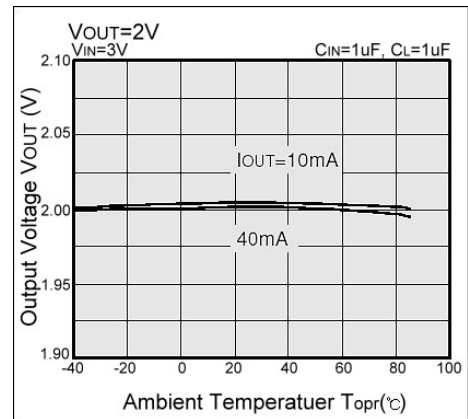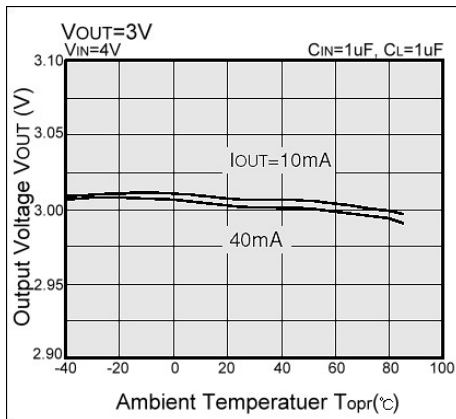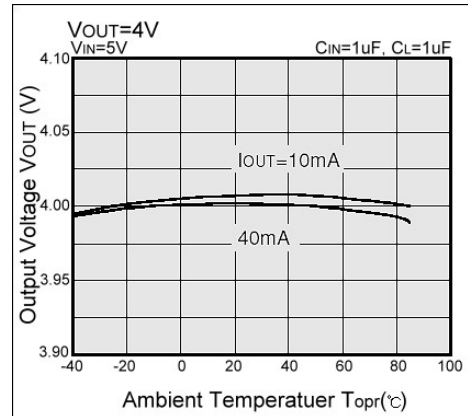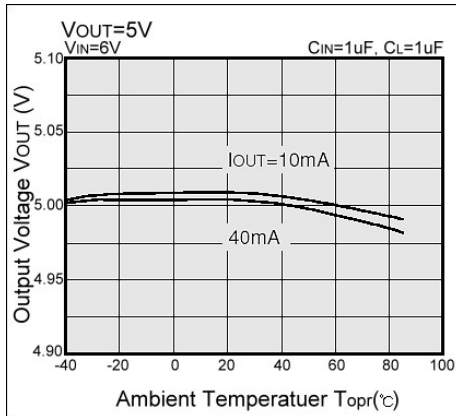

### Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

### Head Office And Factory:

- Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
- TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
- TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165