

SPECIFICATION

Device Name : IGBT Module

Type Name : 6MBI75S-120-01

Spec. No. : MS5F 4847

Date : Jun. - 02 - 2000

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Fuji Electric Co., Ltd.
Matsumoto Factory

	DATE	NAME	APPROVED	Fuji Electric Co., Ltd.		
DRAWN	Jun. - 2 - '00	<i>T. Kobayashi</i>	<i>T. Miyada</i>	DWG. NO.	MS5F 4847	1 / 8
CHECKED	Jun. - 2 - '00	<i>S. Nitta</i>				

Revised Records

Date	Classi- fication	Ind.	Content	Applied date	Drawn	Checked	Approved
Jun.-2-'00	enactment	—	—————	Issued date	—	S. Nishida	T. Miyazaki

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

Fuji Electric Co., Ltd.


DWG. NO.

MS5F 4847

2/8


1. Outline Drawing (Unit : mm)

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever, for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

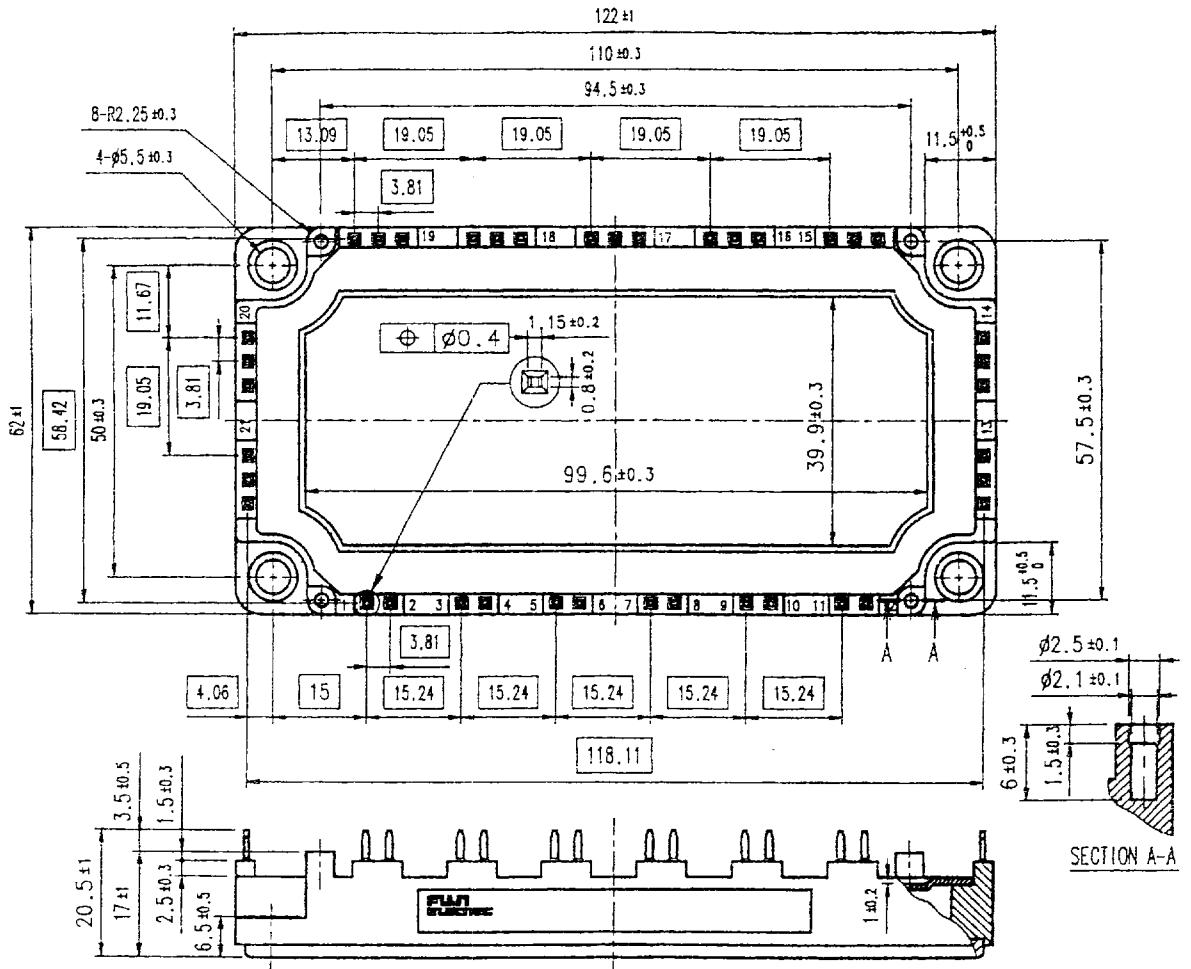

□ shows theoretical dimension.

2. Equivalent circuit

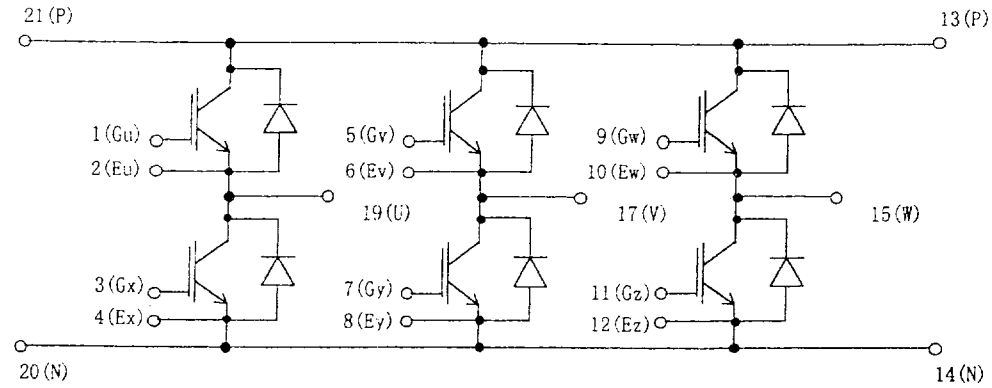

3. Absolute Maximum Ratings (at Tc= 25C unless otherwise specified)

Items	Symbols	Conditions	Maximum Ratings		Units
Collector-Emitter voltage	VCES		120		V
Gate-Emitter voltage	VGES		+20		V
Collector current	Ic	Continuous	Tc=25C	100	A
			Tc=80C	75	
	Ic pulse	1ms	Tc=25C	200	
			Tc=80C	150	
	-Ic			75	
-Ic pulse	1ms		150		
Collector Power Dissipation	Pc	1 device	520		W
Junction temperature	Tj		150		C
Storage temperature	Tstg		-40~ +125		C
Isolation voltage ^(*)	Viso	AC : 1min.	2500		V
Mounting Screw Torque ^(**)			3.5		Nm

(*1) All terminals should be connected together when isolation test will be done.

(*2) Recommendable Value : 2.5~3.5 Nm (M5)

4. Electrical characteristics (at Tj= 25C unless otherwise specified)

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	Max.	
Zero gate voltage Collector current	ICES	VGE = 0 V, VCE = 1200 V			1.0	mA
Gate-Emitter leakage current	IGES	VCE = 0 V, VGE = +20 V			200	nA
Gate-Emitter threshold voltage	VGE(th)	VCE = 20 V, Ic = 75 mA	5.5	7.2	8.5	V
Collector-Emitter saturation voltage	VCE(sat)	VGE = 15 V Ic = 75 A	Tj = 25 C	2.3	2.6	V
			Tj = 125 C	2.8		
Input capacitance	Cies	VGE = 0 V		9000		pF
Output capacitance	Coes	VCE = 10 V		1875		
Reverse transfer capacitance	Cres	f = 1 MHz		1650		
Turn-on time	ton	Vcc = 600 V		0.35	1.2	us
	tr	Ic = 75 A		0.25	0.6	
	tr ₍₀₎	VGE = +15 V		0.1		
Turn-off time	toff	RG = 16 ohm		0.45	1.0	us
	tf			0.08	0.3	
Forward on voltage	VF	IF = 75 A	Tj = 25 C	2.5	3.3	V
			Tj = 125 C	2.0		
Reverse recovery time	trr	IF = 75 A			0.35	us

5. Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	Max.	
Thermal resistance (1 device)	Rth(j-c)	IGBT			0.24	C/W
		FWD			0.50	
Contact Thermal resistance	Rth(c-f)	with Thermal Compound ^(*)		0.05		

* This is the value which is defined mounting on the additional cooling fin with thermal compound.

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.


Fuji Electric Co.,Ltd.

DWG.NO.

MS5F 4847

4/8

6. Indication on module

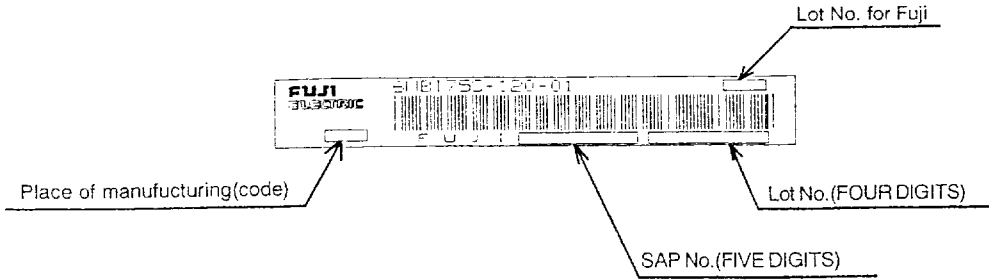

7. Applicable category


This specification is applied to IGBT Module named 6MBI75S-120-01.

8. Storage and transportation notes







- The module should be stored at a standard temperature of 5 to 35°C and humidity of 45 to 75% .
- Store modules in a place with few temperature changes in order to avoid condensation on the module surface.
- Avoid exposure to corrosive gases and dust.
- Avoid excessive external force on the module.
- Store modules with unprocessed terminals.
- Do not drop or otherwise shock the modules when transporting.
- Please connect adequate fuse or protector of circuit between three-phase line and this product to prevent the equipment from causing secondary destruction.

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

9. Definitions of switching time

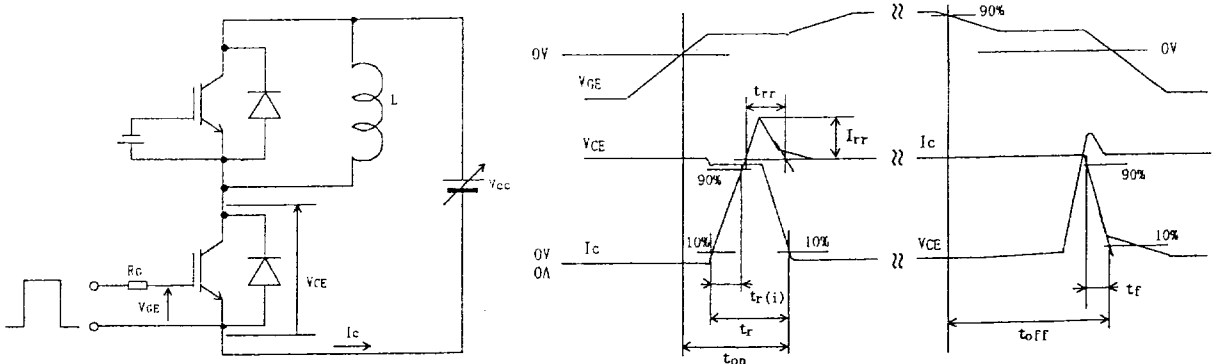

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

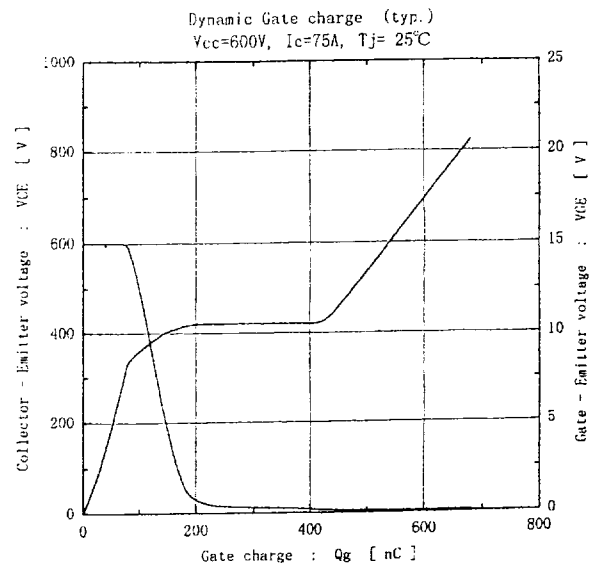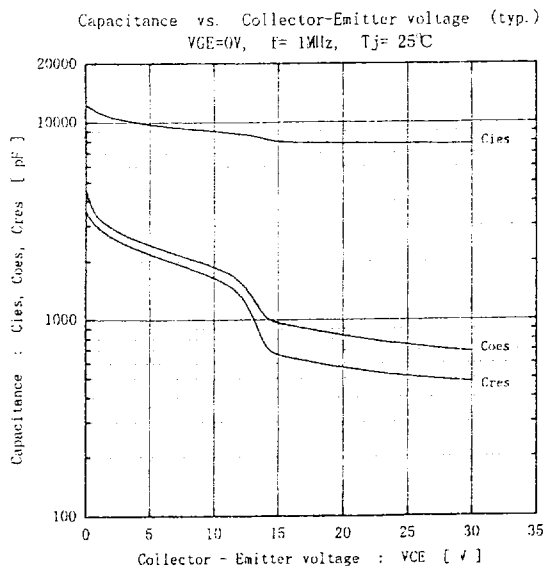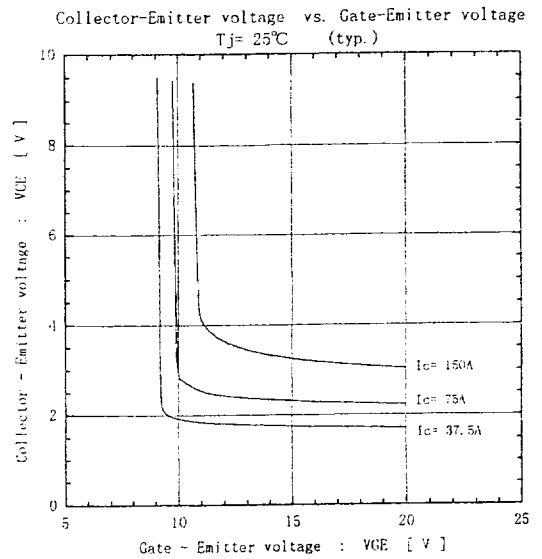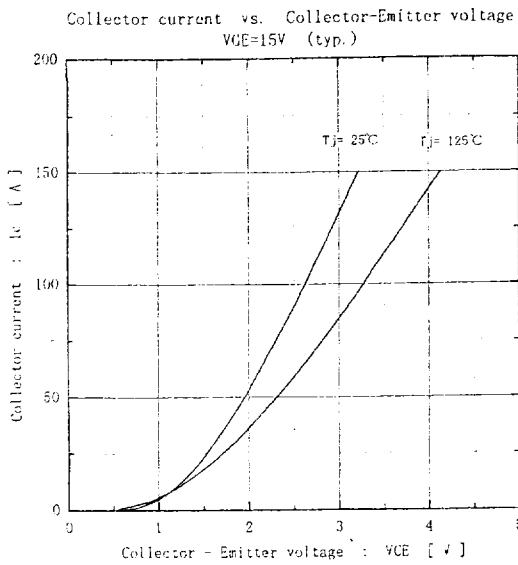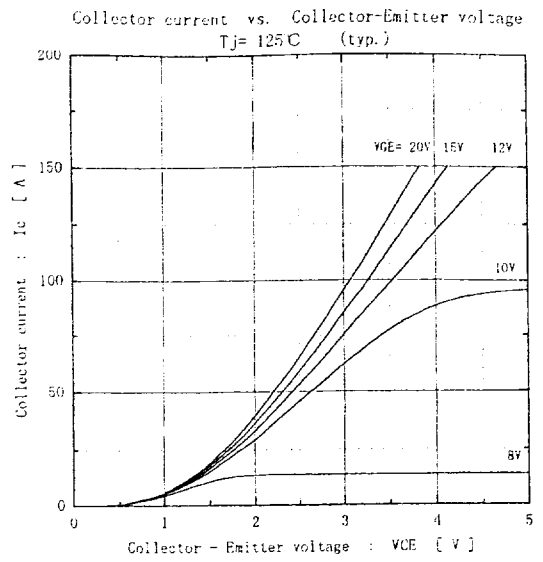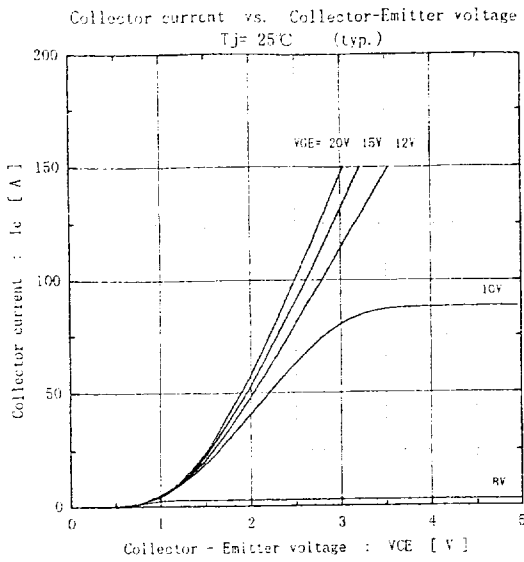

Fuji Electric Co., Ltd.







DWG. NO.

MS5F 4847

6/8

H04-004-03

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

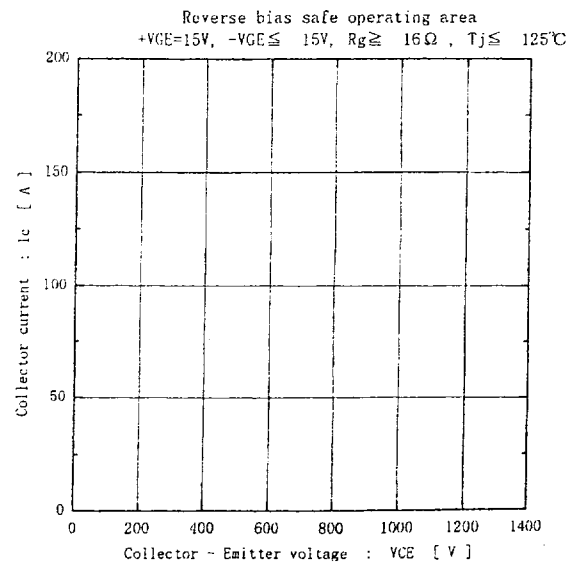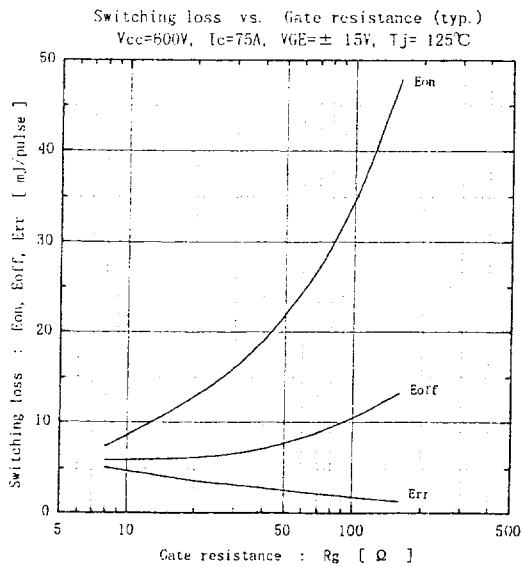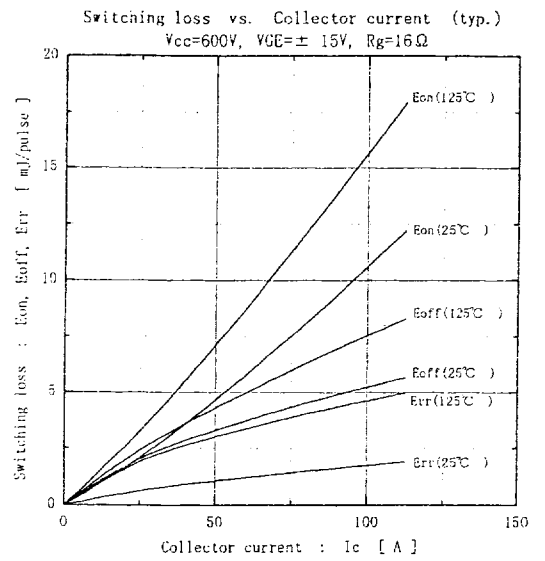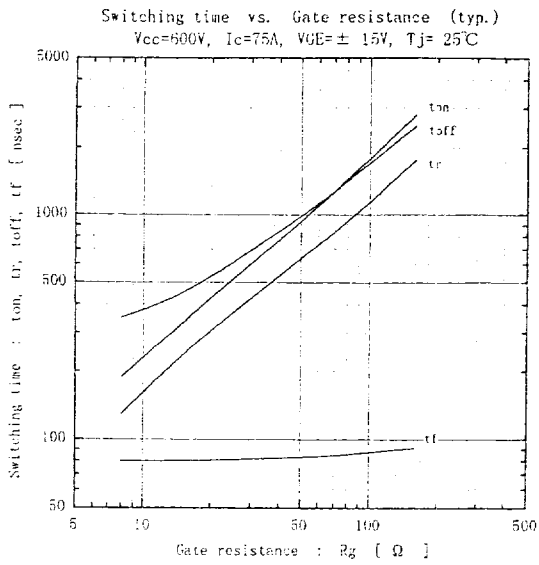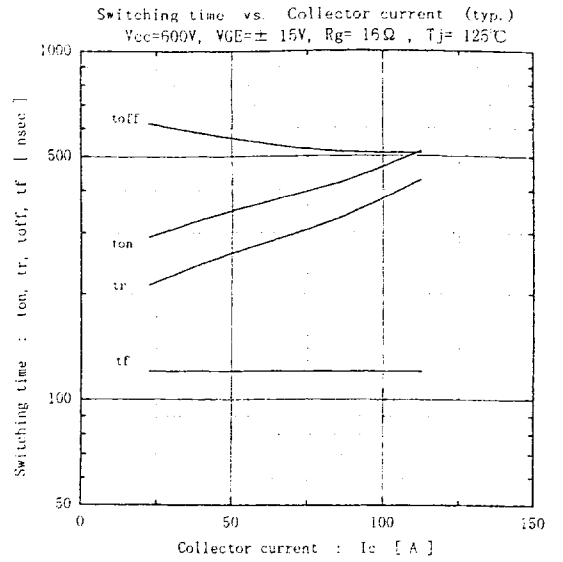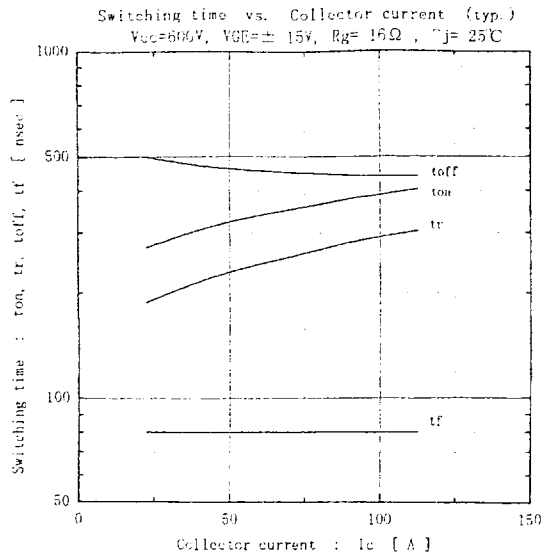

Fuji Electric Co., Ltd.

DWGNO.


MS5F 4847

7/8

H04-004-03


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Forward current vs. Forward on voltage (typ.)

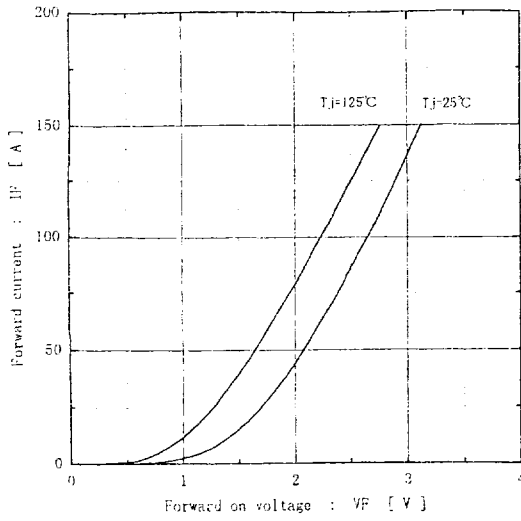


Reverse recovery characteristics (typ.)

V_{CC}=600V, V_{GE}=±15V, R_G=16Ω

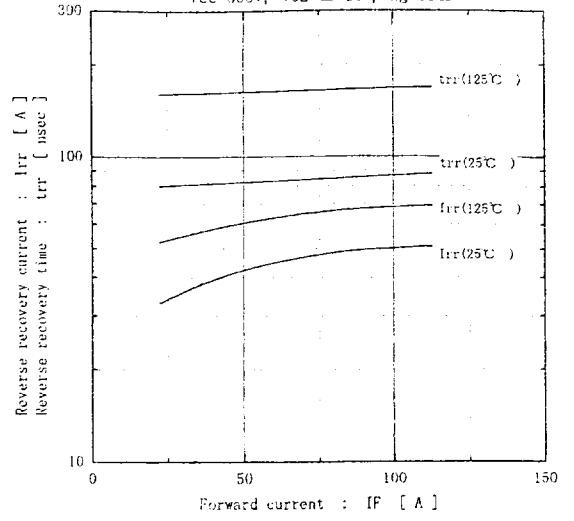

Transient thermal resistance

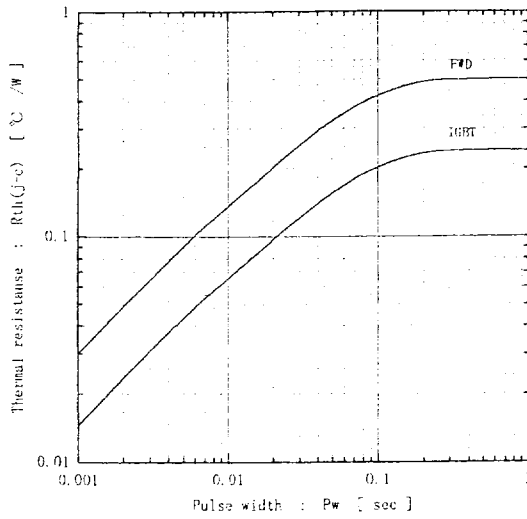

Fuji Electric Co., Ltd.

DWG. NO.

MS5F 4847

8/8

H04-004-03