

MOS FIELD EFFECT TRANSISTOR NP82N055CLE, NP82N055DLE, NP82N055ELE

SWITCHING N-CHANNEL POWER MOS FET INDUSTRIAL USE

55

±20

±82

±300

1.8

163

72 / 50 / 17

51 / 250 / 289

175

-55 to +175

W

W

mJ

°C

°C

DESCRIPTION

These products are N-channel MOS Field Effect Transistor designed for high current switching applications.

FEATURES

- Channel temperature 175 degree rated
- Super low on-state resistance

 $R_{DS(on)1} = 8.4 \text{ m}\Omega$ MAX. (Vgs = 10 V, ID = 41A)

 $R_{DS(on)2} = 11 \text{ m}\Omega$ MAX. (Vgs = 5.0 V, ID = 41 A)

ABSOLUTE MAXIMUM RATINGS (TA = 25°C)

- Low Ciss: Ciss = 4400 pF TYP.
- Built-in gate protection diode

Drain to Source Voltage

Gate to Source Voltage

Drain Current (DC) Note1

Drain Current (Pulse) Note2

Total Power Dissipation (T_A = 25°C)

Total Power Dissipation (Tc = 25°C)

Single Avalanche Current Note3

Single Avalanche Energy Note3

Channel Temperature

Storage Temperature

ORDERING INFORMATION

PART NUMBER	PACKAGE
NP82N055CLE	TO-220AB
NP82N055DLE	TO-262
NP82N055ELE	TO-263

(TO-220AB)



(TO-262)



Notes 1. Calculated constant current according to MAX. allowable channel temperature.

- **2.** PW \leq 10 μ s, Duty cycle \leq 1%
- 3. Starting T_{ch} = 25°C, R_G = 25 Ω , V_{GS} = 20 V \rightarrow 0 V (see Figure 4.)

Voss

Vgss

I_{D(DC)}

ID(pulse)

Рт

Рт

las

Eas

Tch

 T_{stg}

THERMAL RESISTANCE

Channel to Case	Rth(ch-C)	0.92	°C/W	
Channel to Ambient	Rth(ch-A)	83.3	°C/W	


The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version. Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.




ELECTRICAL CHARACTERISTICS (TA = 25°C)

CHARACTERISTICS	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Drain to Source On-state Resistance	RDS(on)1	Vgs = 10 V, ID = 41 A		6.7	8.4	mΩ
	RDS(on)2	Vgs = 5.0 V, ID = 41 A		7.9	11	mΩ
	RDS(on)3	Vgs = 4.5 V, ID = 41 A		8.4	12	mΩ
Gate to Source Threshold Voltage	V _{GS(th)}	$V_{DS} = V_{GS}$, $I_D = 250 \mu\text{A}$	1.5	2.0	2.5	V
Forward Transfer Admittance	yfs	V _{DS} = 10 V, I _D = 41 A	25	50		S
Drain Leakage Current	Ipss	Vps = 55 V, Vgs = 0 V			10	μΑ
Gate to Source Leakage Current	lgss	V _{GS} = ±20 V, V _{DS} = 0 V			±10	μΑ
Input Capacitance	Ciss	Vps = 25 V		4400	6600	pF
Output Capacitance	Coss	V _G S = 0 V		550	830	pF
Reverse Transfer Capacitance	Crss	f = 1 MHz		270	490	pF
Turn-on Delay Time	td(on)	ID = 41 A		28	61	ns
Rise Time	t r	$V_{GS(on)} = 10 V$		16	39	ns
Turn-off Delay Time	td(off)	VDD = 28 V		92	180	ns
Fall Time	t f	$R_G = 1 \Omega$		18	45	ns
Total Gate Charge 1	Q _{G1}	ID = 82 A, VDD = 44 V, VGS = 10 V		80	120	nC
Total Gate Charge 2	Q _{G2}	ID = 82 A		45	68	nC
Gate to Source Charge	Qgs	V _{DD} = 44 V		15		nC
Gate to Drain Charge	Q _{GD}	V _G S = 5.0 V		24		nC
Body Diode Forward Voltage	V _{F(S-D)}	IF = 82 A, VGS = 0 V		1.0		V
Reverse Recovery Time	trr	IF = 82 A, VGS = 0 V		47		ns
Reverse Recovery Charge	Qrr	di/dt = 100 A/μs		66		nC


TEST CIRCUIT 1 AVALANCHE CAPABILITY



TEST CIRCUIT 2 SWITCHING TIME

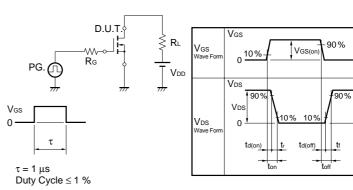



TEST CIRCUIT 3 GATE CHARGE



TYPICAL CHARACTERISTICS (TA = 25°C)







VDS - Drain to Source Voltage - V

10

0.1

Figure 2. TOTAL POWER DISSIPATION vs. CASE TEMPERATURE




Figure4. SINGLE AVALANCHE ENERGY DERATING FACTOR


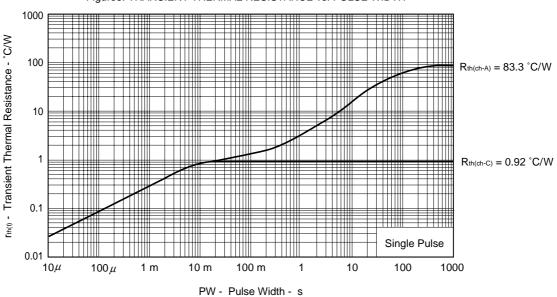





Figure 5. TRANSIENT THERMAL RESISTANCE vs. PULSE WIDTH


100
























Figure 14. CAPACITANCE vs. DRAIN TO SOURCE VOLTAGE



V_{DS} - Drain to Source Voltage - V




Figure 13. SOURCE TO DRAIN DIODE FORWARD VOLTAGE




Figure 15. SWITCHING CHARACTERISTICS






Figure 17. DYNAMIC INPUT/OUTPUT CHARACTERISTICS






PACKAGE DRAWINGS (Unit: mm)


1) TO-220AB (MP-25)

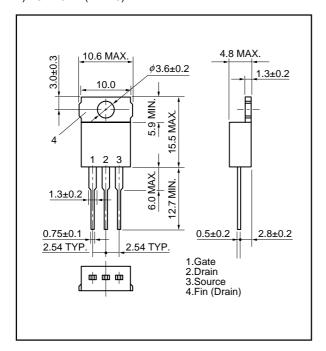


2) TO-262 (MP-25 Fin Cut)



3) TO-263 (MP-25ZJ)

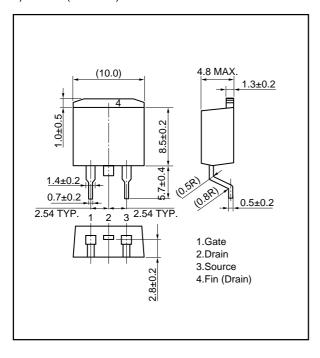

EQUIVALENT CIRCUIT



Remark The diode connected between the gate and source of the transistor serves as a protector against ESD. When this device actually used, an additional protection circuit is externally required if a voltage exceeding the rated voltage may be applied to this device.

[MEMO]

- The information in this document is current as of March, 2001. The information is subject to change
 without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data
 books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products
 and/or types are available in every country. Please check with an NEC sales representative for
 availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of
 third parties by or arising from the use of NEC semiconductor products listed in this document or any other
 liability arising from the use of such products. No license, express, implied or otherwise, is granted under any
 patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers
 agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize
 risks of damage to property or injury (including death) to persons arising from defects in NEC
 semiconductor products, customers must incorporate sufficient safety measures in their design, such as
 redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
 - "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
 - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

- (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4