

BXB100 Series

Single output

- Industry standard footprint
- High power density (36.5 W/in³)
- MTBF >1.4 million hours (Bellcore 332)
- Input voltage to ETS300-132-2
- Adjustable output voltage
- No minimum load required
- Separate case ground pin
- Undervoltage lockout (UVLO)
- UL, VDE and CSA safety approvals
- Available RoHS Compliant



2 YEAR WARRANTY

The BXB100 Series are high power density dc-dc converters packaged in the industry standard footprint (2.40 x 2.28 x 0.50 inches) to give designers optimum choices when specifying for both new and replacement designs. Suitable for a wide range of applications in nearly any industry, the BXB100 was particularly designed with communication and distributed power applications in mind. Using Bellcore 332, the MTBF is greater than 1,400,000 hours. Aluminum baseplate technology with four threaded M3 inserts makes heatsink attachment and optimum thermal management easy. The BXB100 series are approved to IEC950 by UL, CSA and VDE.

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Voltage adjustability	60% to 110%	
Set point accuracy	±1.0%	
Line regulation	Low line to high line	±0.05%
Load regulation	Full load to min. load	±0.10%
Minimum load	0%	
Overshoot	At turn-on and turn-off	None
Undershoot	None	
Ripple and noise (5 Hz to 20 MHz) (See Note 1)	3.3 V and 5 V 12 V and 15 V	75 mV pk-pk, 20 mV rms 100 mV pk-pk, 30 mV rms
Temperature coefficient	±0.01%/°C	
Transient response (See Note 2)	±2.0% max. deviation 170 µs recovery to within ±1.0%	
Remote sense	0.5 Vdc transmission line drop compensation	

INPUT SPECIFICATIONS

Input voltage range	24 Vin nominal 48 Vin nominal	18-36 Vdc 36-75 Vdc
Input current	No load Remote OFF	100 mA max. 20 mA max.
Input current (max.) (See Note 4)	48 V models	4 A max. @ Io max. and Vin = 0-75 V
Input reflected ripple (See Note 6)	5 mA pk-pk	
Active low remote ON/OFF Logic compatibility ON OFF	(See Note 7) Open collector ref to -input 1.2 Vdc max. Open circuit	

INPUT SPECIFICATIONS (continued)

Undervoltage lockout	24 Vin: power up 24 Vin: power down 48 Vin: power up 48 Vin: power down	17 V 16 V 34 V 32.5 V
Start-up time (See Note 8)	Power up Remote ON/OFF	20 ms 20 ms

EMC CHARACTERISTICS

Conducted emissions (See Note 3)	EN55022 (See Note 3) FCC part 15 EN55022, CISPR22	Level A Level A Level A
-------------------------------------	---	-------------------------------

GENERAL SPECIFICATIONS

Efficiency	See table	
Isolation voltage	Input/case Input/output Output/case	1500 Vdc 1500 Vdc 1500 Vdc
Switching frequency	Fixed	500 kHz typ.
Approvals and standards (See Note 5)	VDE0805, EN60950, IEC950 UL1950, CSA C22.2 No. 950	
Case material	Aluminum baseplate with plastic case	
Material flammability	UL94V-0	
Weight	110 g (3.88 oz)	
MTBF	Bellcore 332 MIL-HDBK-217F @ 40 °C, 100% load	1,400,000 hours 580,000 hours min.

ENVIRONMENTAL SPECIFICATIONS

Thermal performance	Operating case temp. Non-operating	-40 °C to +100 °C -55 °C to +125 °C
Altitude	Operating Non-operating	10,000 feet max. 40,000 feet max.
Vibration	5 Hz to 500 Hz	2.4G rms (approx.)

BXB100 Series

Single output

DC-DC CONVERTERS | 66-100 W Wide Input DC-DC Converters

2

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OVP	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.)	EFFICIENCY (TYP.)	REGULATION		MODEL NUMBER (7, 9, 10)
							LINE	LOAD	
66 W	18-36 Vdc	4.3 Vdc	3.3 V	0 A	20 A	77%	±0.05%	±0.1%	BXB100-24S3V3FLTJ
100 W	18-36 Vdc	14.5 Vdc	12 V	0 A	8.33 A	85%	±0.05%	±0.1%	BXB100-24S12FLTJ
66 W	36-75 Vdc	4.3 Vdc	3.3 V	0 A	20 A	78%	±0.05%	±0.1%	BXB100-48S3V3FLTJ
100 W	36-75 Vdc	6.5 Vdc	5 V	0 A	20 A	83%	±0.05%	±0.1%	BXB100-48S05FLTJ
100 W	36-75 Vdc	14.5 Vdc	12 V	0 A	8.33 A	86%	±0.05%	±0.1%	BXB100-48S12FLTJ
100 W	36-75 Vdc	17.5 Vdc	15 V	0 A	6.67 A	86%	±0.05%	±0.1%	BXB100-48S15FLTJ

Notes

- 1 Measured with 10 μ F tantalum capacitor and 1 μ F ceramic capacitor across output.
- 2 $di/dt = 0.1$ A/1 μ s, $V_{in} = 48$ Vdc, $T_c = 25$ °C, load change = 0.5 I_o max. to 0.75 I_o max. and 0.75 I_o max. to 0.5 I_o max.
- 3 Units should be characterised within systems. External components required.
- 4 Input fusing is recommended based on surge current and maximum input current.
- 5 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 6 Simulated source impedance of 12 μ H. 12 μ H inductor in series with +Vin.
- 7 Active high remote on/off option is available (standard product is active low), designate with the suffix 'FHT' e.g. **BXB100-48S05FHTJ**. Consult factory for further details and options.
- 8 Start-up into resistive load.
- 9 The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 10 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

PROTECTION

Short circuit	Continuous, automatic recovery
Overvoltage	Non-latching
Undervoltage	Non-latching
Thermal	110 °C baseplate, automatic recovery

TELECOM SPECIFICATION


Central office interface A	ETS300-132-2
----------------------------	--------------

PIN CONNECTIONS

PIN NUMBER	FUNCTION
1	+ Vin
2	Remote ON/OFF
3	Case
4	- Vin
5	- Vout
6	- Sense
7	Trim
8	+ Sense
9	+ Vout


EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown.



BXB100 Series

Single output

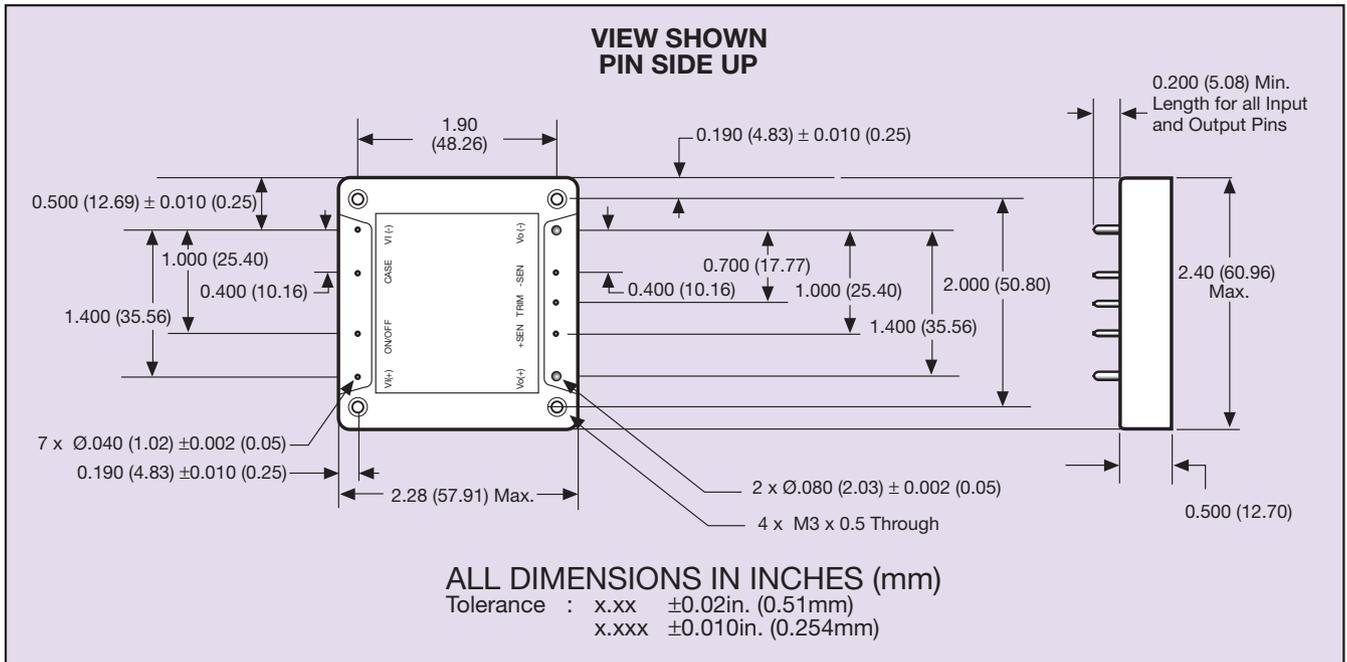

International Safety Standard Approvals

 VDE0805/EN60950/IEC950 File No. 10401-3336-1095

 UL1950 File No. E136005

 CSA C22.2 No. 950 File No. LR41062C

Datasheet © Artesyn Technologies® 2005

The information and specifications contained in this datasheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.