


SINGLE SUPPLY QUAD OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION


The **NJM13403** is single-supply quad operational amplifier, which can operate from 2V supply. The features are low offset voltage, low bias current, high slew-rate, free cross-over distortion through the AB class output stage.

The package lineup is DIP, DMP and others compact, which is SON, so that the **NJM13403** is suitable for audio for low voltage operation and any other kind of signal amplifier.


■ PACKAGE OUTLINE



NJM13403D1



NJM13403M



NJM13403E




NJM13403V

■ FEATURES

- Operating Voltage (+2V to 14V)
- Slew Rate (1.2V/μs typ.)
- Operating Current (3.0mA typ.)
- Bipolar Technology
- Package Outline DIP14,DMP14,EMP14,SSOP14

■ PIN CONFIGURATION




NJM13403D1/13403M
NJM13403E/13403V

PIN FUNCTION

- | | |
|-------------------|--------------|
| 1. A OUTPUT | 8. C OUTPUT |
| 2. A -INPUT | 9. C -INPUT |
| 3. A +INPUT | 10. C +INPUT |
| 4. V ⁺ | 11. GND |
| 5. B +INPUT | 12. D +INPUT |
| 6. B -INPUT | 13. D -INPUT |
| 7. B OUTPUT | 14. D OUTPUT |

■ EQUIVALENT CIRCUIT (1/4Shown)

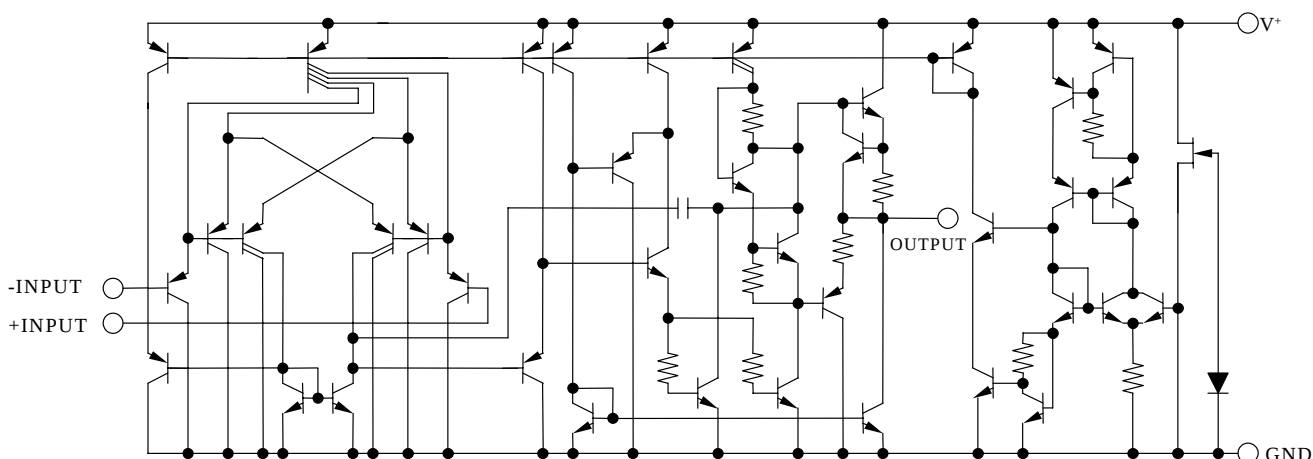

■ ABSOLUTE MAXIMUM RATINGS


(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	15	V
Differential Input Voltage	V_{ID}	14	V
Input Voltage	V_{IC}	- 0.3 to +14	V
Power Dissipation	P_D	(DIP8) 700 (DMP8) 300 (EMP8) 300 (SSOP8) 300	mW
Operating Temperature Range	T_{opr}	- 40 to +85	°C
Storage Temperature Range	T_{stg}	- 40 to +125	°C


■ ELECTRICAL CHARACTERISTICS ($V^+=5V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V_{opr}		2	-	14	V
Input Offset Voltage	V_{IO}	$R_S=0\Omega$	-	0.5	4	mV
Input Offset Current	I_{IO}		-	5	50	nA
Input Bias Current	I_B		-	25	150	nA
Large Signal Voltage Gain	A_V	$R_L \geq 2k\Omega$	88	100	-	dB
Maximum Output Voltage Swing	V_{OM}	$R_L=2k\Omega$	4.0	4.2	-	V
Input Common Mode Voltage Range	V_{ICM}		0 to 3.5	-	-	V
Common Mode Rejection Ratio	CMR		70	90	-	dB
Supply Voltage Rejection Ratio	SVR		80	94	-	dB
Output Source Current	I_{SOURCE}	$V_{IN}^+=1V, V_{IN}^-=0V$	20	35	-	mA
Output Sink Current	I_{SINK}	$V_{IN}^+=0V, V_{IN}^-=1V$	10	30	-	mA
Operating Current	I_{CC}	$R_L=\infty$	-	3.0	5.0	mA
Slew Rate	SR	$V^+/V^-=\pm 2.5V, R_L=2k\Omega$, $A_V=0dB, f=1kHz$	-	1.2	-	V/ μs
Unity Gain Bandwidth	f_T	$R_L=2k\Omega$	-	2.0	-	MHz
Total Harmonic Distortion	THD	$R_L=2k\Omega, A_V=40dB$, $f=20kHz, V_O=1.0V_{rms}$	-	0.2	-	%


NJM13403 Operating Current vs. Operating Voltage

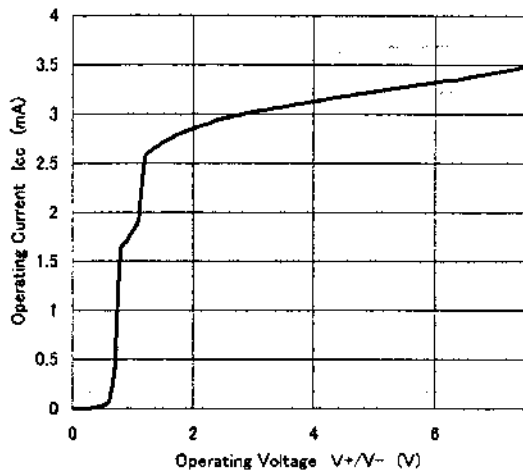


NJM13403 Input Offset Voltage vs. Operating Voltage

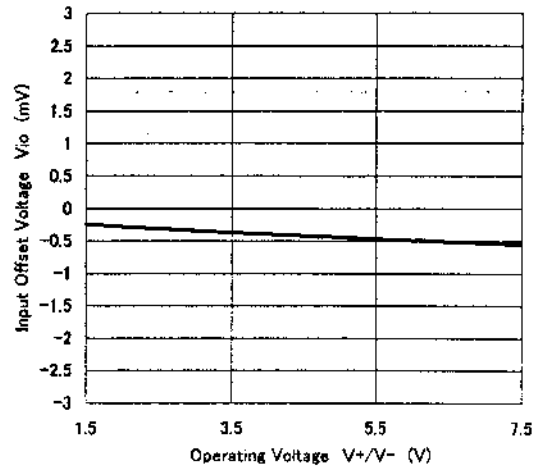


NJM13403 Input Bias Current vs. Operating Voltage

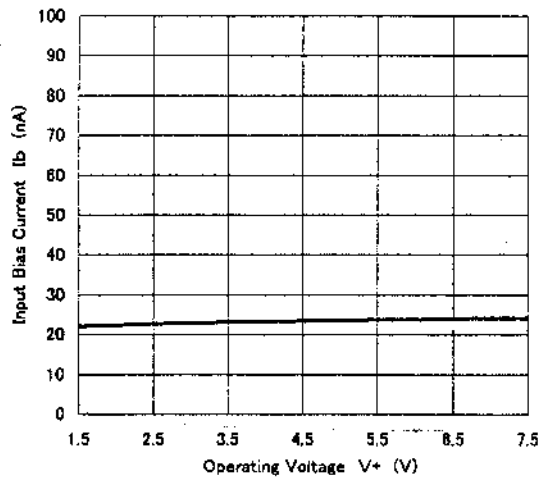


NJM13403 Maximum Output Voltage Swing vs. Operating Voltage

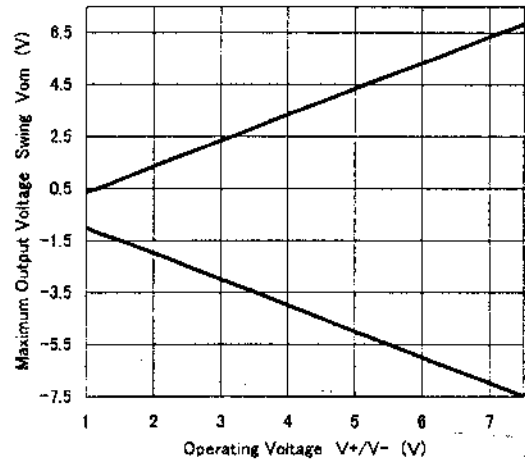

NJM13403 Input CommonMode Voltage Range

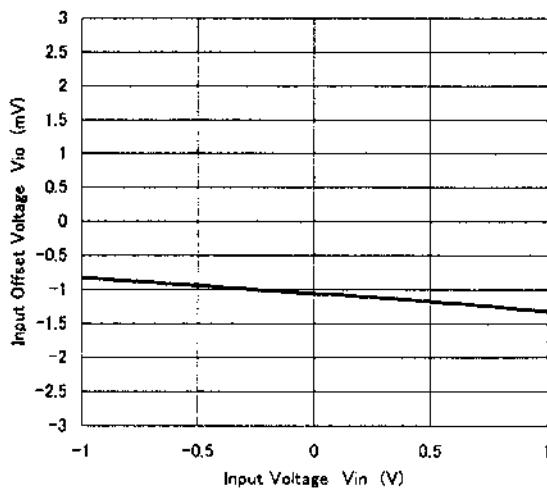


NJM13403 Large Signal Voltage Gain vs. Operating Voltage

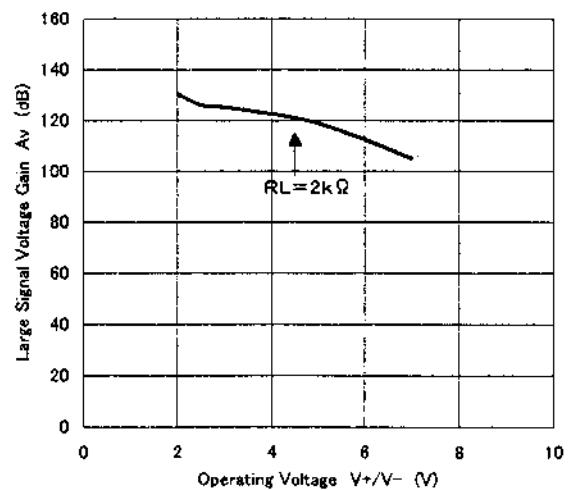


NJM13403


NJM13403 Maximum Output Voltage Swing vs Frequency

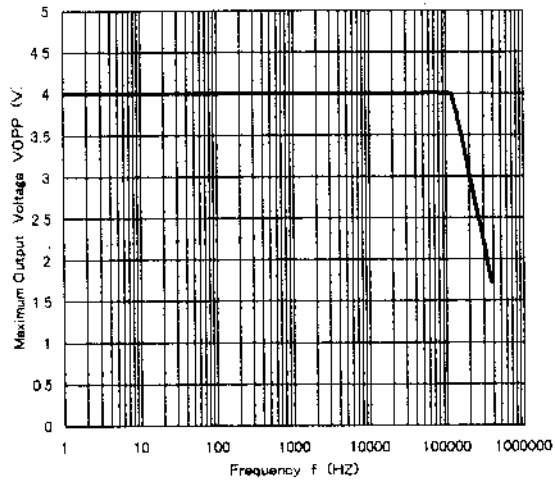


NJM13403 Open Loop Voltage Gain vs Frequency

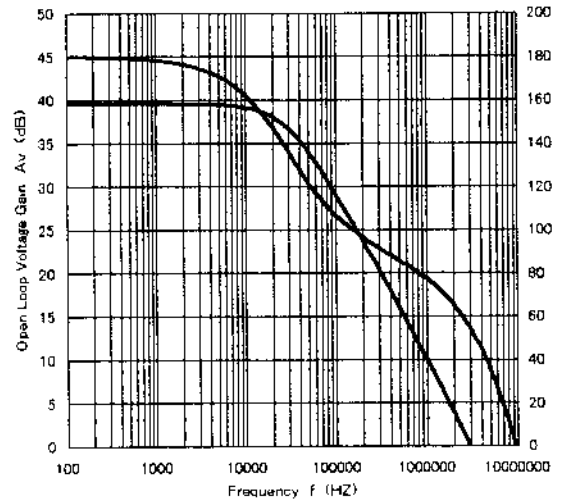


NJM13403 Output Voltage vs. Output Sink Current

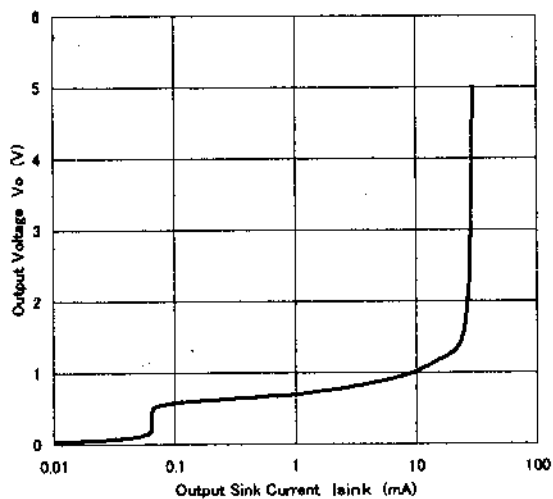


NJM13403 Output Voltage vs. Output Source Current

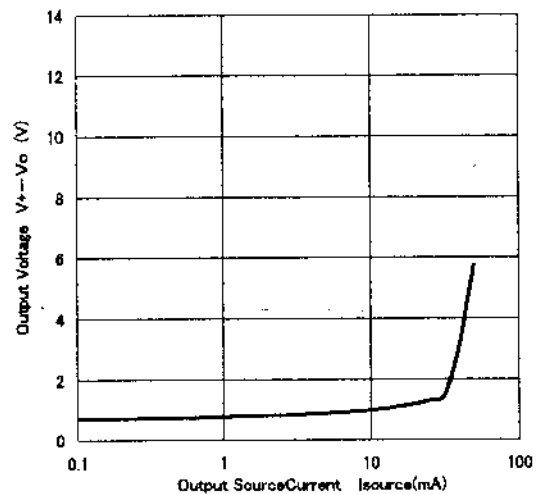


NJM13403 Maximum Output Voltage vs Load Resistance

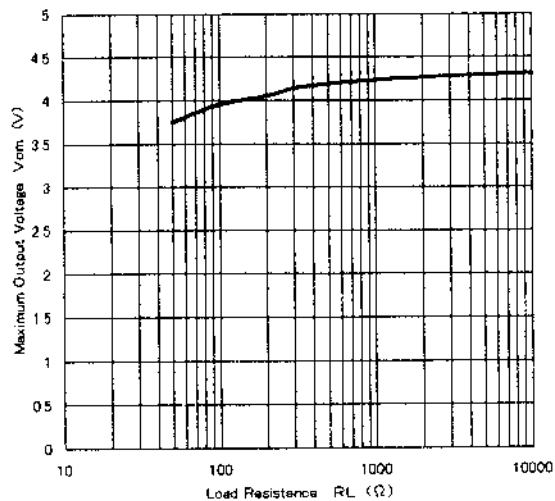


NJM13403 Slew Rate (Rise)

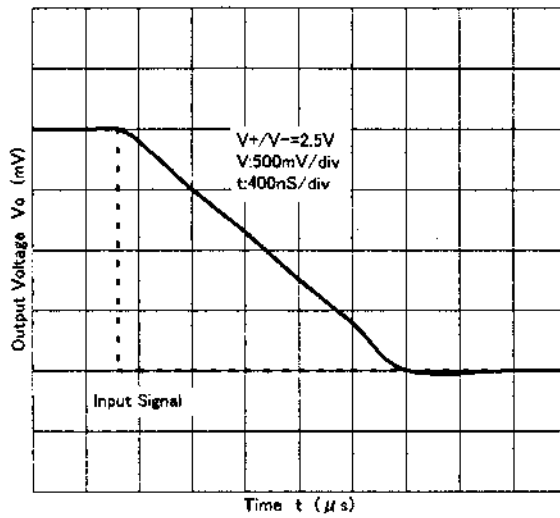


NJM13403 Slew Rate (Fall)

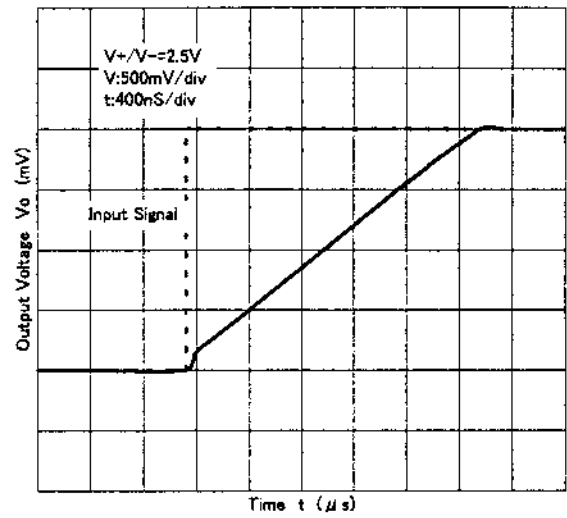

NJM13403 Total Harmonic Distortion

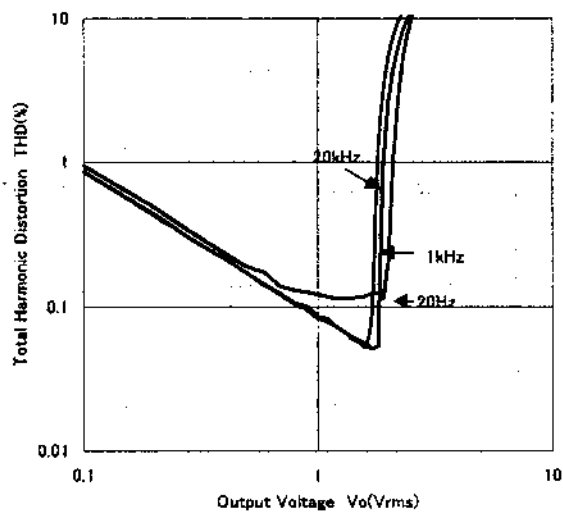


NJM13403 Equivalent Noise Voltage vs. Frequency

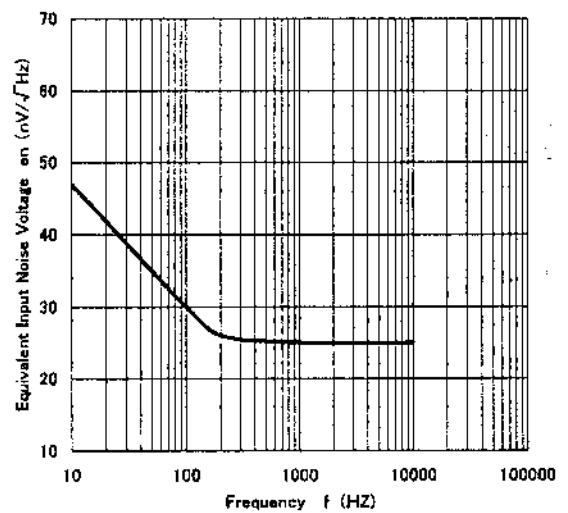


NJM13403


NJM13403 Operating Voltage vs. Temperature

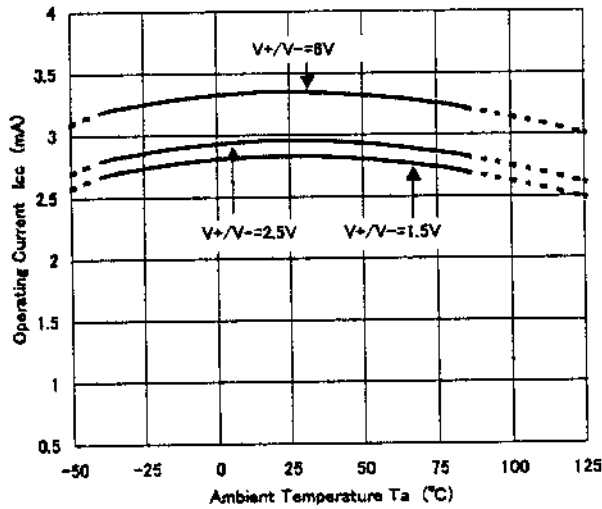


NJM13403 Input Offset Voltage vs. Temperature

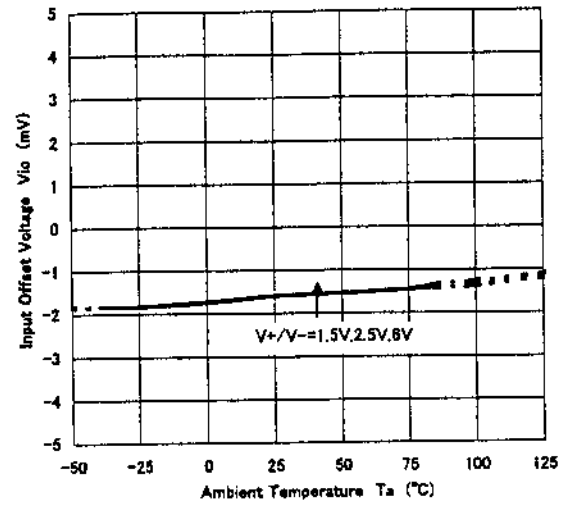


NJM13403 Input Bias Current vs. Temperature

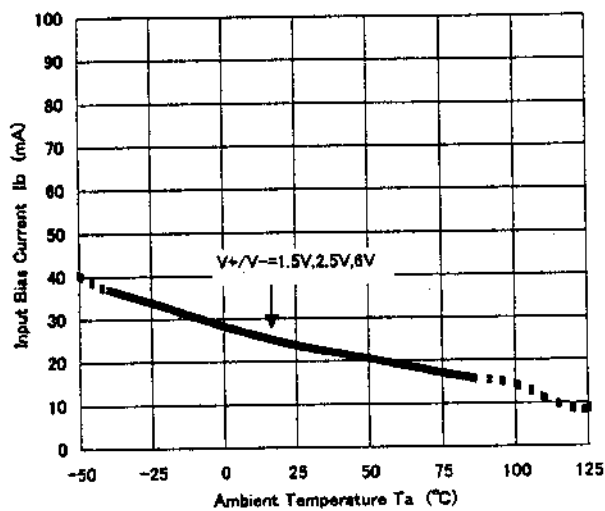


NJM13403 Maximum Output Voltage Swing vs. Temperature

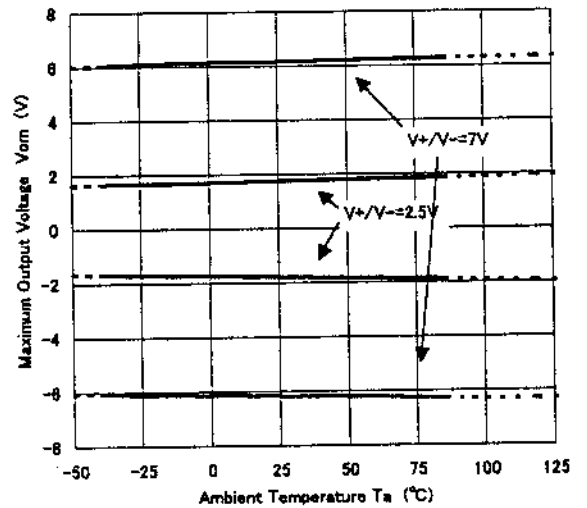


NJM13404 Output Sink Current vs. Temperature

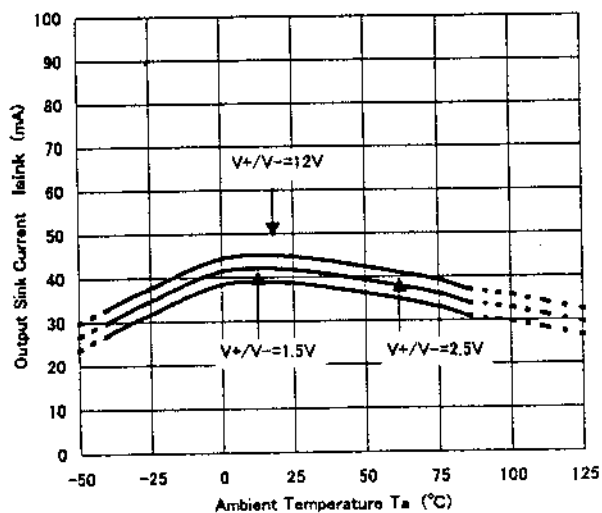


NJM13404 Output Source Current vs. Temperature

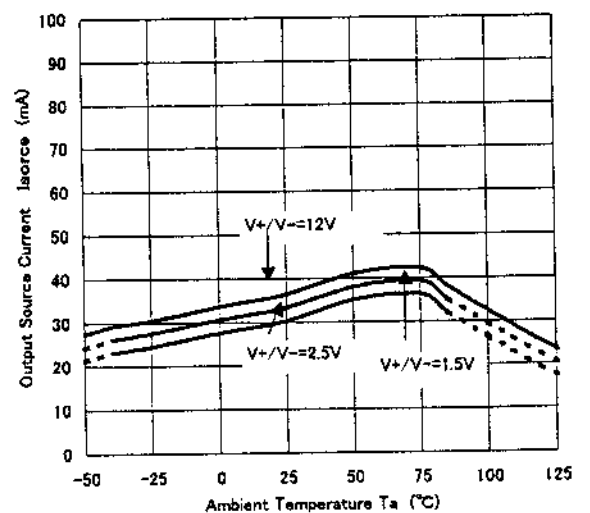


NJM13403 Open Loop Voltage Gain vs. Temperature

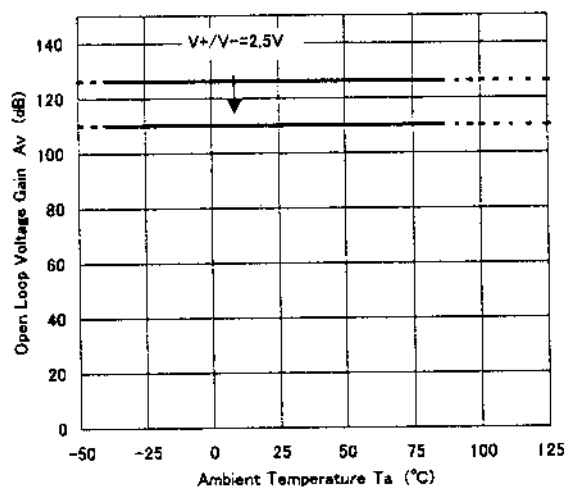

NJM13403 Common Mode Rejection Ratio vs. Temperature

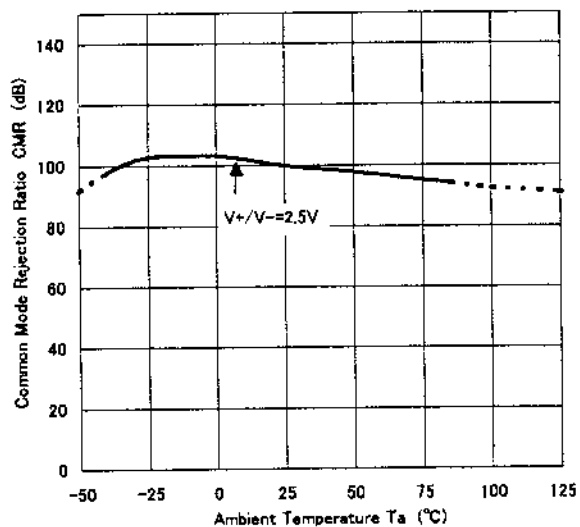

NJM13403 Supply Voltage Rejection Ratio vs. Temperature

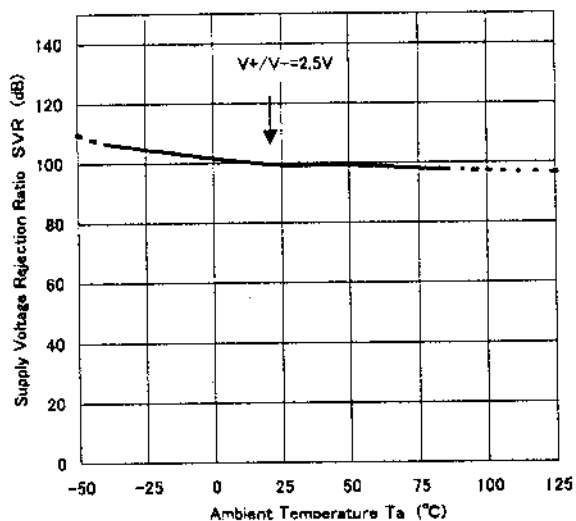

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.