

SAW Filters for Infrastructure Systems

Series/Type: B3867

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39301B3867H510		2008-02-07	2008-07-31	2008-10-31

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.



SAW Components B3867
Low-Loss Filter 300,0 MHz


Data Sheet

Features


- Low-loss IF filter for WLL
- Temperature stable
- High nearby selectivity
- Ceramic SMD package

Terminals

Gold plated



Ceramic package DCC12A




Dimensions in mm, approx. weight 0,5 g

Pin configuration

10	Input				
1	Input ground				
5	Output				
6	Output ground				
3, 8	Ground				

2, 4, 7, 9 Case Ground



Туре	Ordering code	Marking and Package according to	Packing according to
B3867	B39301-B3867-H510	C61157-A7-A94	F61074-V8163-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_{A}	- 40/ + 85	°C
Storage temperature range	$T_{\rm stg}$	- 40/+ 85	°C
DC voltage	$V_{\rm DC}$	0	V
Source power	P_{s}	0	dBm



SAW Components B3867

300,0 MHz **Low-Loss Filter**

Data Sheet

Characteristics

Operating temperature:

 $T_{\rm A} = -30 \dots +70 \,^{\circ}{\rm C}$ $Z_{\rm S} = 50 \,\Omega$ and matching network $Z_{\rm L} = 50 \,\Omega$ and matching network Terminating source impedance: Terminating load impedance:

			min.	typ.	max.	
Center frequency		$f_{\mathbb{C}}$	299,910	300,015	300,090	MHz
(center between 3dB points)						
Minimum insertion attenuation		α_{min}	_	18,0	19,0	dB
(including matching network)						
Passband width ¹⁾						
$lpha_{\sf rel} \le 3$		$B_{3,0dB}$	3,3	3,35	_	MHz
$\alpha_{rel} \leq 2$	10 dB	$B_{40\mathrm{dB}}$		4,75	4,8	MHz
Absolute group delay (at $f_{\mathbb{C}}$)		τ	_	1,75	1,8	μs
Amplitude ripple (p-p)		$\Delta \alpha$				
$f_{\rm C}\pm 1,2$	2 MHz		_	0,8	1,1	dB
Group delay ripple (p-p)		Δau				
$f_{\rm C}\pm 1.6$	6 MHz			125	200	ns
Phase ripple (p-p)		Δφ				
$f_{\rm C} \pm 1.6$	6 MHz		_	5	10	۰
Return loss (Input and Output	t)					
$f_{\rm C} \pm 1.6$	6 MHz		10	12		dB
Triple Transit Suppression			37	38	_	dB
Relative attenuation (relative	to α_{min}) ²⁾	$lpha_{\sf rel}$				
$f_{\rm C} \pm 6 {\rm MHz} \dots f_{\rm C} \pm 40$			45	50	_	dB
Temperature coefficient of fro	equency ³⁾	TC _f	_	- 0,036	_	ppm/K ²
Turnover temperature		T_0	_	20	_	°C

¹⁾ all bandwidths are centered at fc

²⁾ apart from two peaks at or around $f_{\rm C}$ + 21 MHz with typically 45 dB attenuation




SAW Components B3867

Low-Loss Filter 300,0 MHz

Data Sheet

Matching network (Element values depend upon PCB layout):

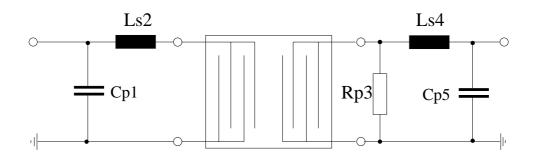

$$C_{p1} = 22 \text{ pF}$$

 $L_{s2} = 33 \text{ nH}$

$$R_{p3} = 150 \text{ Ohm}$$


 $L_{s4} = 18 \text{ nH}$
 $C_{p5} = 22 \text{ pF}$




SAW Components B3867
Low-Loss Filter 300,0 MHz

Data Sheet

Transfer function

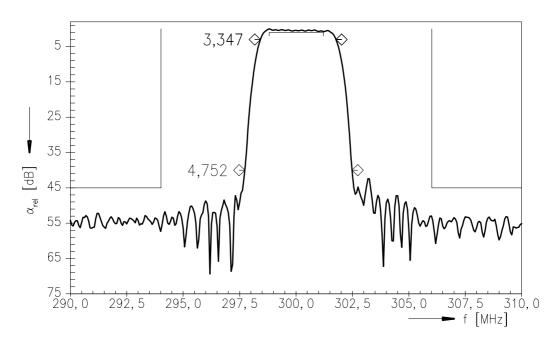

Transfer function (pass band)

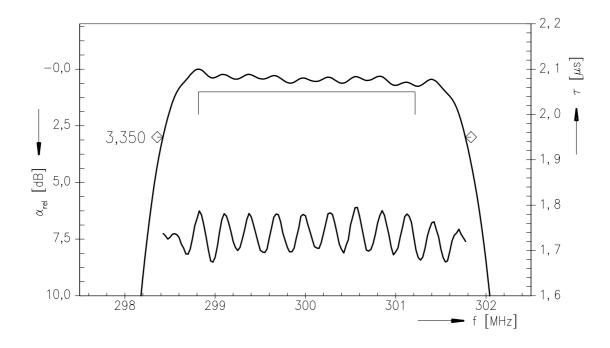



SAW Components B3867
Low-Loss Filter 300,0 MHz

Data Sheet

Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC IS P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.