

Surface Mount EMI Filters Ferrite Chip Beads




Ferrite Chip Beads

Features

- Multilayer design
- Available in standard EIA/EIAJ chip sizes (0402/1005, 0603/1608, 0805/2012, 1206/3216, etc.)
- Excellent solderability is achieved from a nickel barrier with a solder overplate
- Provides EMI attenuation without grounding
- Broad range of impedance values available (standard line has values of 5 Ω to 2,000 Ω at 100 MHz)
- Closed magnetic circuit
- Parts are suitable for flow or re-flow soldering
- Available in tape and reel for easy placement
- Operational temperature range of -55°C to +125°C

Applications

- Telecommunications equipment (cellular phones, cordless phones, faxes and ISDN's)
- Digital audio/visual equipment (TV, HDTV, VTR, DVD, CATV tuners and etc.)
- GPS and car navigation equipment
- High speed clocks
- Consumer electronics
- Signal lines
- LAN and WAN hardware

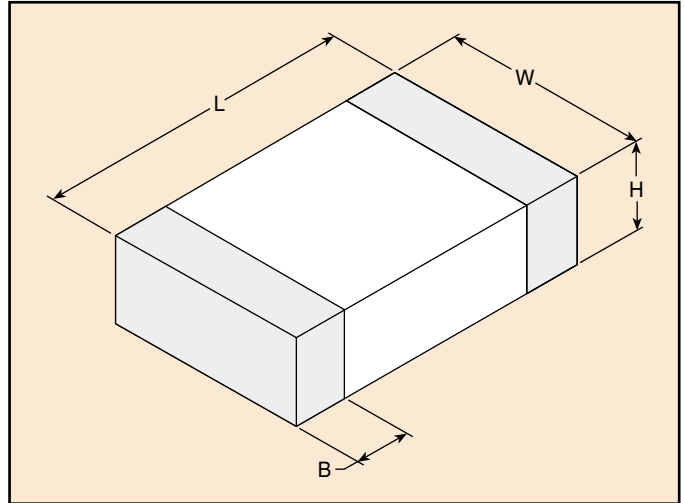

Part Numbering System

Example: **FCB-0603-B102P7**

FCB	-	0603	-	B	102	P	7
Series Ferrite Chip Beads		Part Size EIA Size (Length x Width)		Material Characteristic Determined by the desired electrical characteristic	Impedance Value 10(2) (2) = the # of zeros that will follow the first two digits Example: 10(2) = 10 followed by 2 zeros = 1,000 Ohms	Tolerance Code Standard Value is P P = $\pm 25\%$ M = $\pm 20\%$ K = $\pm 10\%$ J = $\pm 5\%$	Packaging 7 = 7 inch reel 3 = 13 inch reel B = Bulk

Land Patterns and Soldering Temperature Profiles

- See page 33.

Packaging Specifications and Storage Requirements

- See page 34.

Surface Mount EMI Filters Ferrite Chip Beads

Physical Characteristics

Size		Physical Dimensions			
EIA	EIAJ	Length (L)	Width (W)	Height (H)	Termination Band (B)
0402	1005	0.039 ± 0.004 (1.00 ± 0.10)	0.020 ± 0.004 (0.50 ± 0.10)	0.020 ± 0.004 (0.50 ± 0.10)	0.010 ± .004 (0.25 ± 0.10)
0603	1608	0.063 ± 0.006 (1.60 ± 0.15)	0.031 ± 0.006 (0.80 ± 0.15)	0.031 ± 0.006 (0.80 ± 0.15)	0.014 ± 0.006 (0.36 ± 0.15)
0805	2012	0.079 ± 0.008 (2.00 ± 0.20)	0.049 ± 0.008 (1.25 ± 0.20)	0.035 ± 0.008 (0.90 ± 0.20)	0.020 ± 0.010 (0.51 ± 0.25)
1206	3216	0.126 ± 0.008 (3.20 ± 0.20)	0.063 ± 0.008 (1.60 ± 0.20)	0.043 ± 0.008 (1.10 ± 0.20)	0.020 ± 0.010 (0.51 ± 0.25)
1806	4516	0.177 ± 0.010 (4.50 ± 0.25)	0.063 ± 0.008 (1.60 ± 0.20)	0.055 ± 0.010 (1.40 ± 0.25)	0.020 ± 0.010 (0.51 ± 0.25)
1812	4532	0.177 ± 0.010 (4.50 ± 0.25)	0.126 ± 0.010 (3.20 ± 0.25)	0.055 ± 0.010 (1.40 ± 0.25)	0.020 ± 0.010 (0.51 ± 0.25)

Dimensions in inches (mm)

Electrical Characteristics

Standard FCB-0402 Sizes

Part Number	Impedance Ω at 100 MHz	Max. DCR Ω	Max. Current mA
FCB-0402-B100P*	10	0.05	500
FCB-0402-B150P*	15	0.07	300
FCB-0402-B700P*	70	0.40	200
FCB-0402-B121P*	120	0.50	200
FCB-0402-B221P*	220	0.70	100
FCB-0402-B601P*	600	1.10	50
FCB-0402-B102P*	1,000	1.50	50

Notes: * Please add packaging code at the end of part.
To change Tolerance Code, replace P with other tolerance values.

FCB-0603 High Speed Beads

Part Number	Impedance Ω at 100 MHz	Max. DCR Ω	Max. Current mA
FCB-0603-H180P*	18	0.10	400
FCB-0603-H121P*	120	0.40	200
FCB-0603-H141P*	140	0.30	200
FCB-0603-H421P*	420	0.50	200
FCB-0603-H601P*	600	0.65	150
FCB-0603-H721P*	720	0.70	150
FCB-0603-H102P*	1,000	0.60	50

Notes: * Please add packaging code at the end of part.
To change Tolerance Code, replace P with other tolerance values.

Standard FCB-0603 Sizes

Part Number	Impedance Ω at 100 MHz	Max. DCR Ω	Max. Current mA
FCB-0603-B300P*	30	0.10	400
FCB-0603-B400P*	40	0.10	400
FCB-0603-B600P*	60	0.20	300
FCB-0603-B750P*	75	0.20	300
FCB-0603-B800P*	80	0.20	300
FCB-0603-B900P*	90	0.20	300
FCB-0603-B101P*	100	0.30	250
FCB-0603-B121P*	120	0.30	250
FCB-0603-B141P*	140	0.30	250
FCB-0603-B151P*	150	0.30	250
FCB-0603-B181P*	180	0.30	250
FCB-0603-B221P*	220	0.35	230
FCB-0603-B301P*	300	0.35	230
FCB-0603-B421P*	420	0.40	210
FCB-0603-B601P*	600	0.45	210
FCB-0603-B102P*	1,000	0.60	190

Notes: * Please add packaging code at the end of part.
To change Tolerance Code, replace P with other tolerance values.



Surface Mount EMI Filters

Ferrite Chip Beads

Ferrite Chip Beads

Electrical Characteristics *continued*

Standard FCB-0805 Sizes

Part Number	Impedance Ω at 100 MHz	Max. DCR Ω	Max. Current mA
FCB-0805-A050P*	5	0.07	800
FCB-0805-A070P*	7		
FCB-0805-A100P*	10		
FCB-0805-A110P*	11		
FCB-0805-A300P*	30	0.10	800
FCB-0805-A400P*	40		
FCB-0805-A500P*	50		
FCB-0805-A600P*	60		
FCB-0805-A750P*	75		
FCB-0805-A800P*	80		
FCB-0805-B900P*	90	0.15	400
FCB-0805-B101P*	100		
FCB-0805-B121P*	120		
FCB-0805-B151P*	150		
FCB-0805-B181P*	180		
FCB-0805-B201P*	200		
FCB-0805-B301P*	300	0.30	200
FCB-0805-B401P*	400		
FCB-0805-B421P*	420		
FCB-0805-B601P*	600		
FCB-0805-B751P*	750	0.40	200
FCB-0805-B102P*	1,000		
FCB-0805-B152P*	1,500	0.55	200
FCB-0805-B202P*	2,000	0.70	200
FCB-0805-E202P*	2,000	0.30	100

FCB-0805 High Speed Beads

Part Number	Impedance Ω at 100 MHz	Max. DCR Ω	Max. Current mA
FCB-0805-H180P*	18	0.10	600
FCB-0805-H201P*	200	0.40	
FCB-0805-H601P*	600	0.40	200
FCB-0805-H751P*	750	0.70	
FCB-0805-H102P*	1,000	0.75	100

Notes: * Please add packaging code at the end of part.
To change Tolerance Code, replace P with other tolerance values.
Consult factory for other impedance values of the 0805 footprint that are available from Spectrum Control.

Standard FCB-1206 Sizes

Part Number	Impedance Ω at 100 MHz	Max. DCR Ω	Max. Current mA
FCB-1206-A190P*	19		
FCB-1206-A260P*	26		
FCB-1206-A300P*	30	0.10	600
FCB-1206-A310P*	31		
FCB-1206-A500P*	50		
FCB-1206-A600P*	60		
FCB-1206-A700P*	70		
FCB-1206-A800P*	80		
FCB-1206-A900P*	90	0.20	400
FCB-1206-A101P*	100		
FCB-1206-A121P*	120		
FCB-1206-A201P*	200	0.30	
FCB-1206-A301P*	300	0.40	300
FCB-1206-A601P*	600	0.50	200
FCB-1206-B102P*	1,000	0.70	150
FCB-1206-B152P*	1,500 @ 50 MHz	0.90	
FCB-1206-B202P*	2,000 @ 30 MHz	0.60	100

FCB-1206 High Speed Beads

Part Number	Impedance Ω at 100 MHz	Max. DCR Ω	Max. Current mA
FCB-1206-H300P*	30	0.10	600
FCB-1206-H181P*	180	0.30	300
FCB-1206-H601P*	600	0.30	200

Notes: * Please add packaging code at the end of part.
To change Tolerance Code, replace P with other tolerance values.
Consult factory for other impedance values of the 1206 footprint that are available from Spectrum Control.

Standard FCB-1806 and FCB-1812 Sizes

Part Number	Impedance Ω at 100 MHz	Max. DCR Ω	Max. Current mA
FCB-1806-A800P*	80	0.30	300
FCB-1806-A101P*	100	0.30	200
FCB-1812-B121P*	120	0.30	300

Notes: * Please add packaging code at the end of part.
To change Tolerance Code, replace P with other tolerance values.
Consult factory for other impedance values of the 1806 and 1812 footprint that are available from Spectrum Control.


Surface Mount EMI Filters Ferrite Chip Beads

Typical Impedance Characteristics (Curves not listed are available upon request or at our website.)




0402 Size

FCB-0402-B150

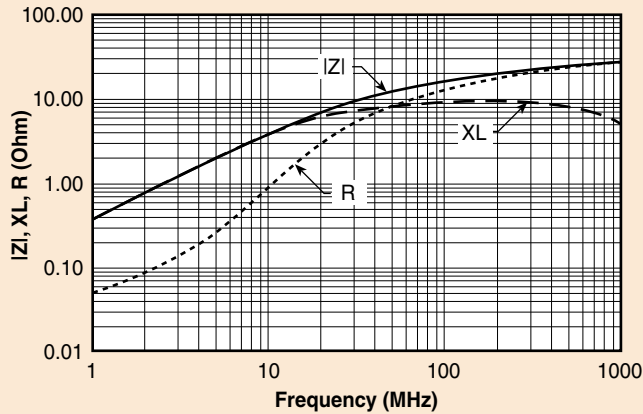


FCB-0402-B221

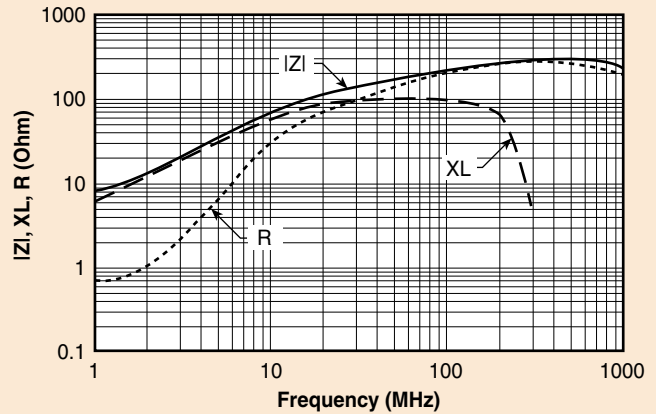


0603 Size


FCB-0603-B300

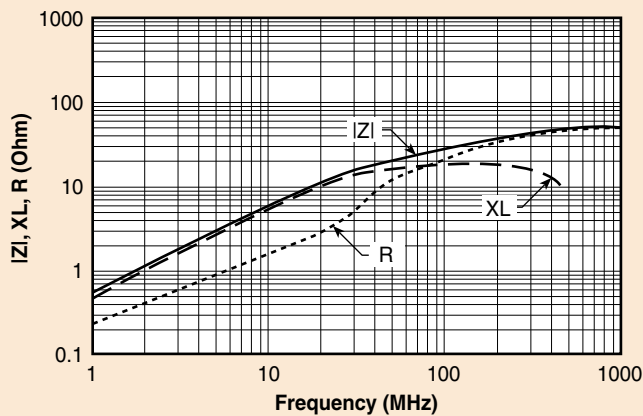


FCB-0603-B600

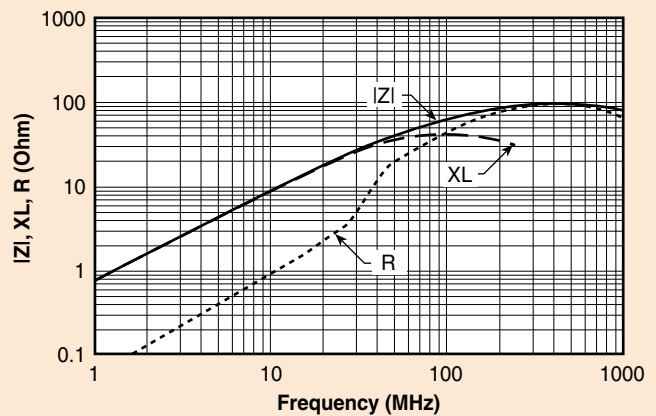

FCB-0603-B800

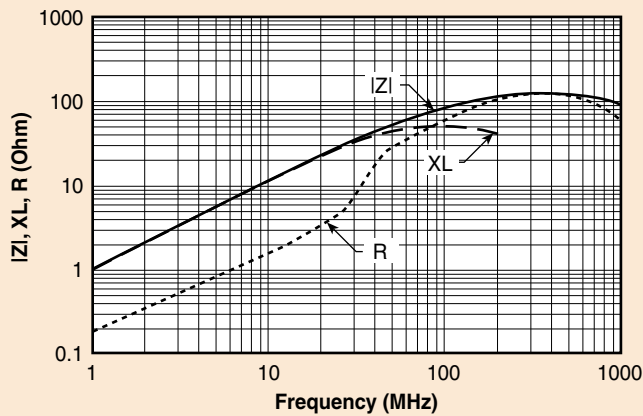

FCB-0603-B900

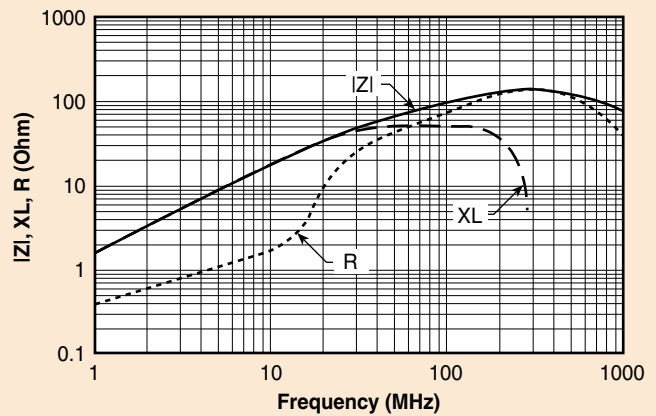


Surface Mount EMI Filters

Ferrite Chip Beads


Typical Impedance Characteristics (Curves not listed are available upon request or at our website.)

0603 Size *continued*


FCB-0603-B101

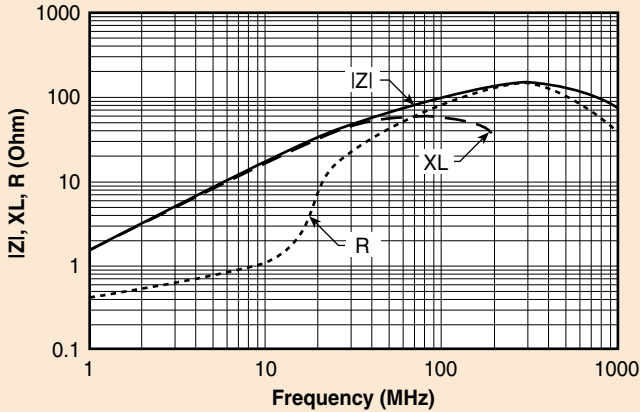


FCB-0603-B121

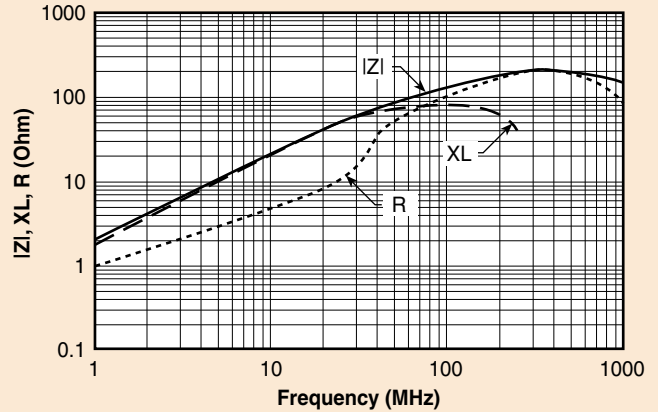


FCB-0603-B151

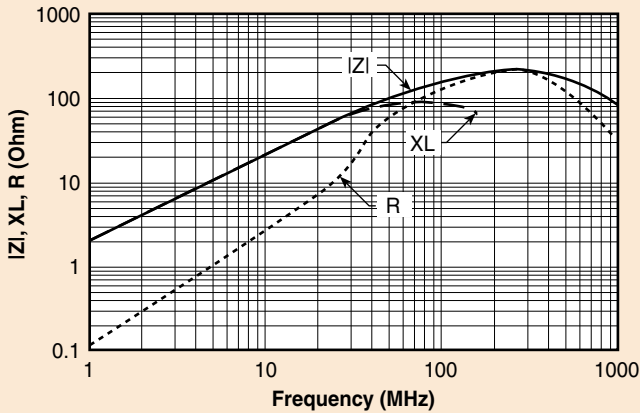


FCB-0603-B301

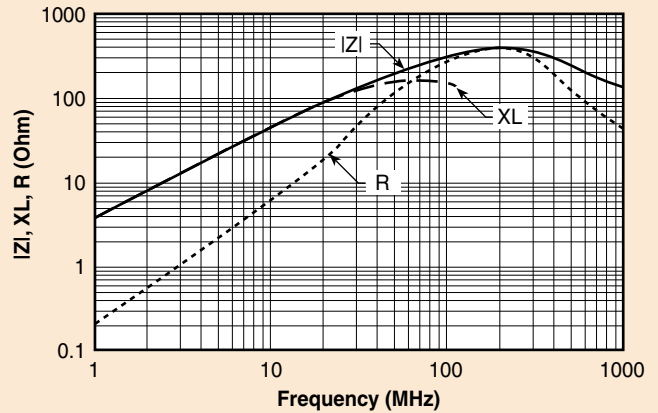

FCB-0603-B601

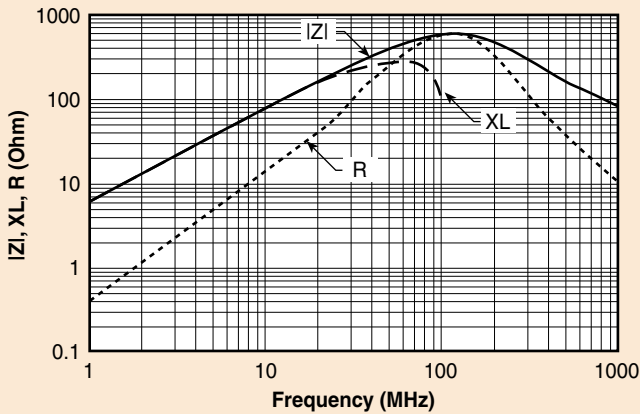

FCB-0603-B102








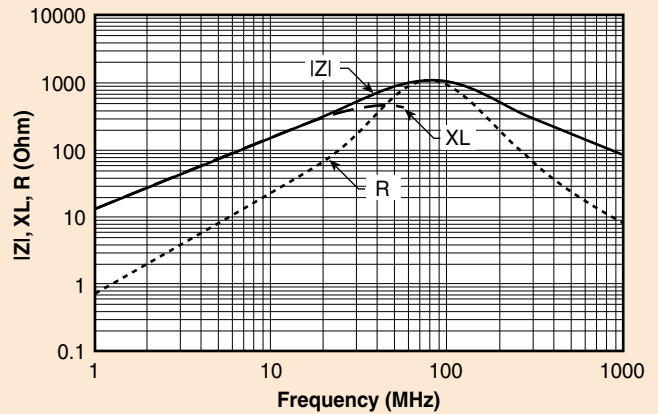


Surface Mount EMI Filters Ferrite Chip Beads

Typical Impedance Characteristics (Curves not listed are available upon request or at our website.)



0805 Size

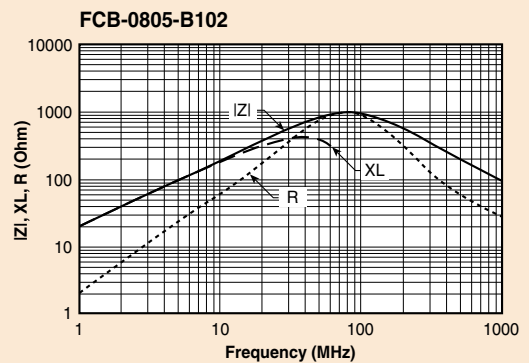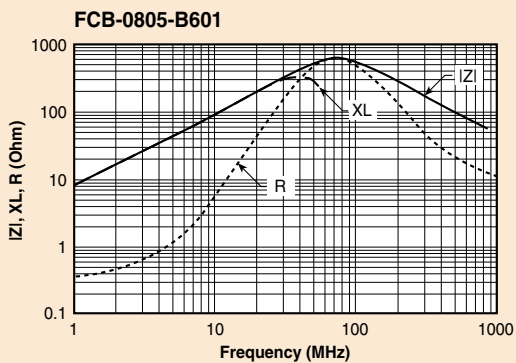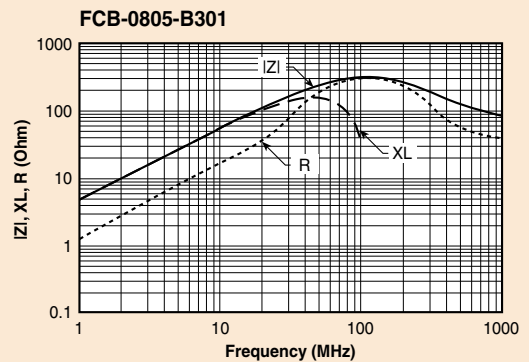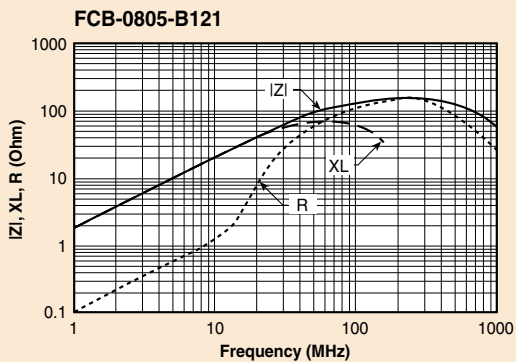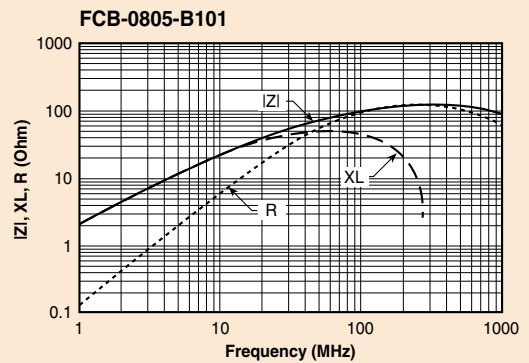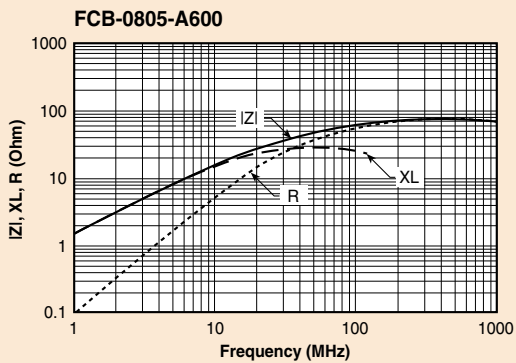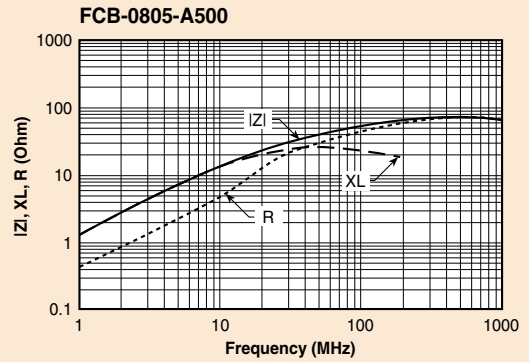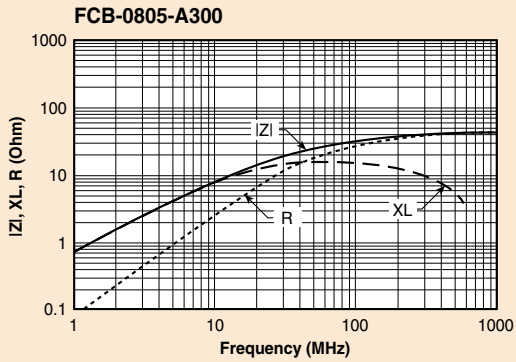


Surface Mount EMI Filters

Ferrite Chip Beads


Typical Impedance Characteristics (Curves not listed are available upon request or at our website.)

1206 Size


FCB-1206-A300

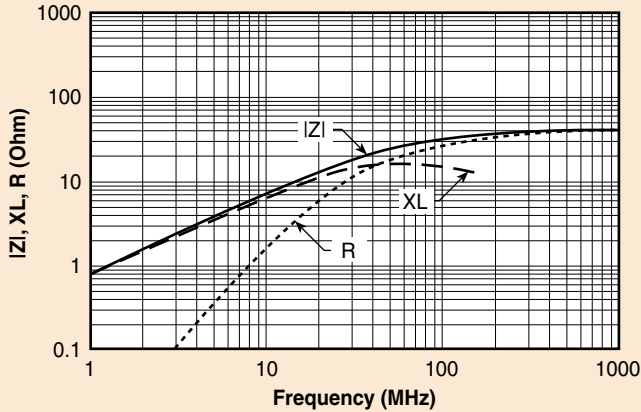


FCB-1206-A500

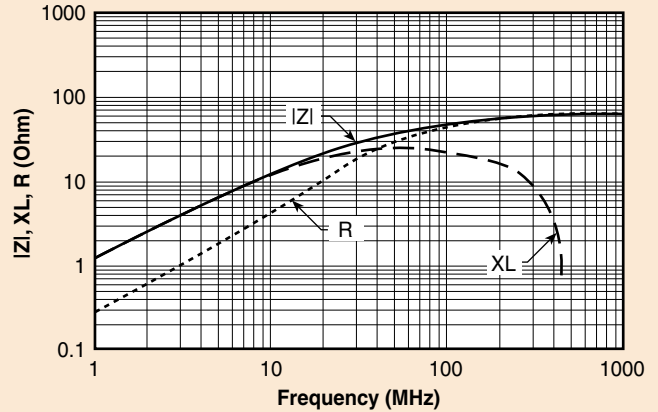


FCB-1206-A600

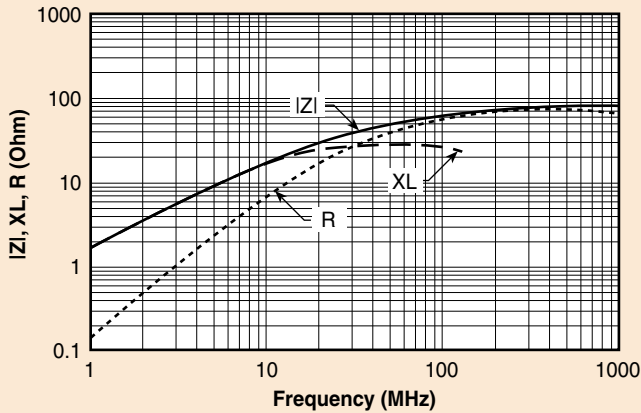


FCB-1206-A700

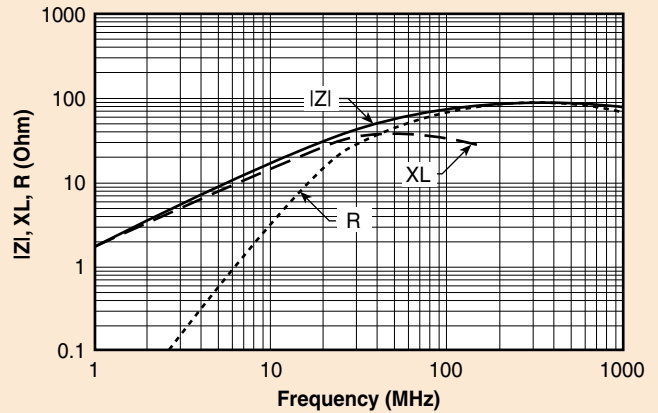

FCB-1206-A800

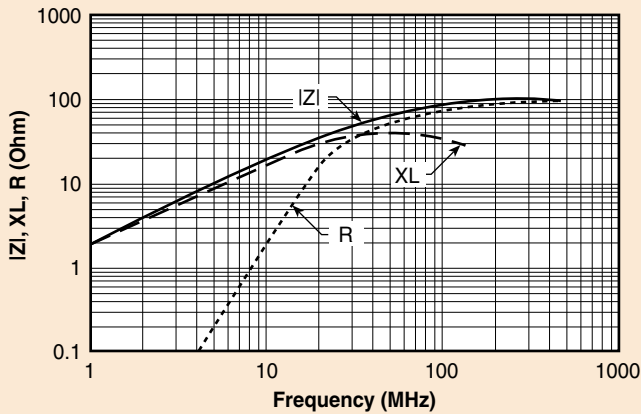

FCB-1206-A900

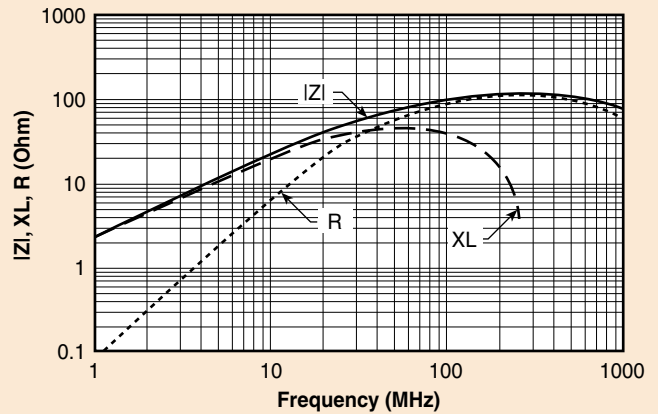


Surface Mount EMI Filters Ferrite Chip Beads

Typical Impedance Characteristics (Curves not listed are available upon request or at our website.)




1206 Size *continued*


FCB-1206-A101

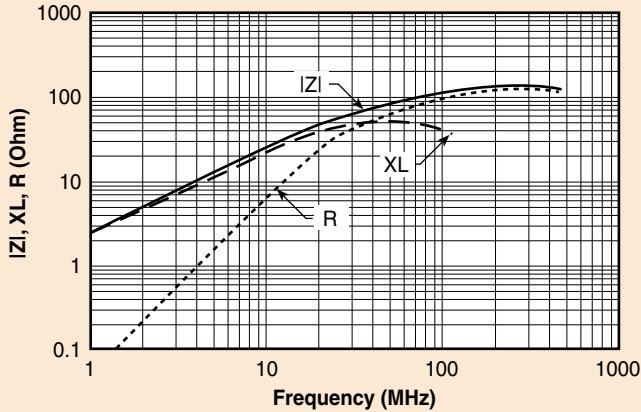


FCB-1206-A121

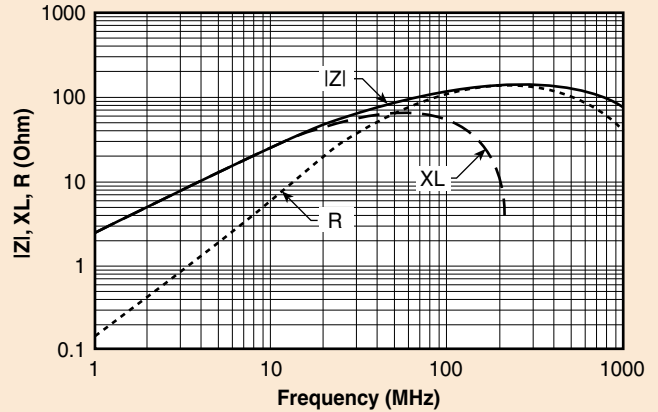


FCB-1206-A201

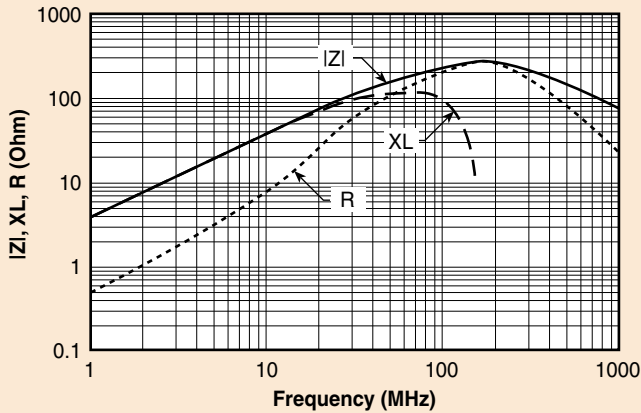

FCB-1206-A301

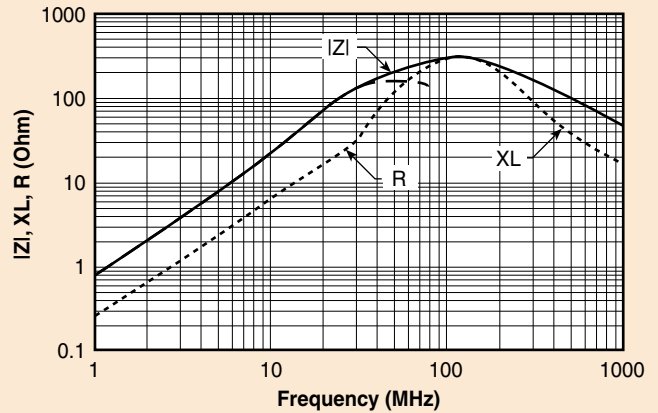

FCB-1206-A601

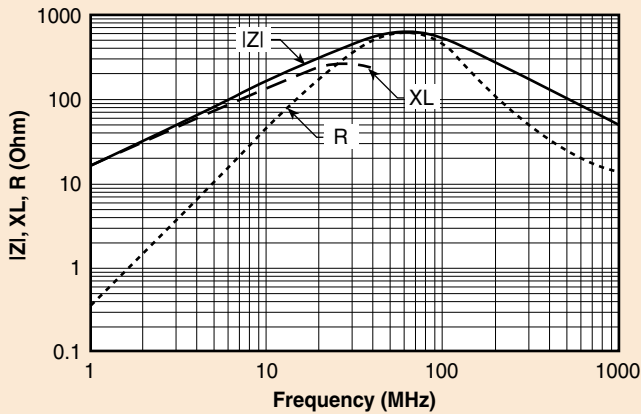

FCB-1206-B102

