

NFS110 Medical Series

Single and quad output




LOW TO MEDIUM POWER AC/DC POWER SUPPLIES

80-110W AC/DC Universal Input Switch Mode Power Supplies

1

- 7.0 x 4.25 x 1.8 inch package
- Medical, dental and laboratory applications
- Overvoltage and short circuit protection
- 110W with 20CFM
- UL, VDE and CSA safety approvals
- EN60601-1 and UL2601 medical approvals

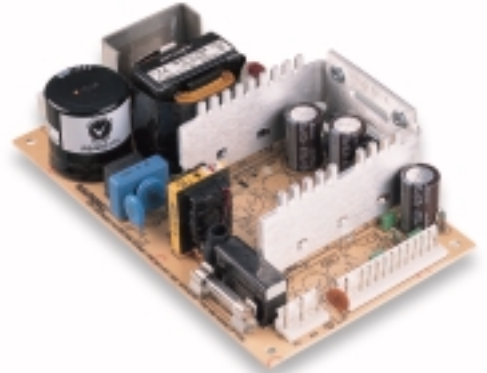

The NFS110 medical series is a 80 to 110W universal input AC/DC power supply on a 7 x 4.25 inch card with a maximum component height of 1.8 inches for use in medical applications. The NFS110 medical series has the same generic feature set as the standard NFS110 series but have been designed with lower safety ground leakage and higher isolation as required for medical safety approval. The NFS110 provides 80W of output power with free air convection cooling which can be boosted to 110W with 20CFM of air. Standard features include overvoltage and short-circuit protection. The series, with full medical safety approval to EN60601 and UL2601, meets conducted emissions EN55022 level A. The NFS110 medical series is designed for use in low power medical, dental and laboratory applications such as dialysis machines, monitoring equipment, instrumentation and infusion pump controls.

CE (LVD)

2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Voltage adjustability	+5.1V output on multi's	±3.0%
	5.1V single	±3.0%
	12V single	12V to 14V
	15V single	15V to 18V
	24V single	24V to 30V
Line regulation	LL to HL, FL All outputs on all units	±0.1% max.
Overshoot/undershoot	At turn-on no load	0%
Temperature coefficient	All outputs	±0.02%/°C
Overvoltage protection	Multi output 5.1V only	6.25V±0.75V
	5.1V single	6.25V±0.75V
	12V single	15.75V±1.0V
	15V single	22V±1.5V
	24V single	33V±2.5V
Output power limit	Primary power limited	Pin max. 160W Pout min. 110W
Short circuit protection	Burst mode operation	

INPUT SPECIFICATIONS

Input voltage range	90 to 253VAC 127 to 357VDC	
Input frequency range	47Hz to 440Hz	
Input surge current	110VAC, 50Hz	17A
	230VAC, 50Hz	35A
Safety ground leakage current	132VAC	50µA
	264VAC	100µA

EMC CHARACTERISTICS

Conducted emissions	EN55022, FCC part 15	Level A
Radiated emissions	EN55022, FCC part 15	Level A
ESD air	EN61000-4-2, level 3	Perf. criteria 1
ESD contact	EN61000-4-2, level 4	Perf. criteria 1
Surge	EN61000-4-5, level 3	Perf. criteria 1
Fast transients	EN61000-4-4, level 3	Perf. criteria 1
Radiated immunity	EN61000-4-3, level 3	Perf. criteria 2
Conducted immunity	EN61000-4-6, level 3	Perf. criteria 2

GENERAL SPECIFICATIONS

Hold-up time	110VAC @ 80W	35ms
	110VAC @ 110W	17ms
	230VAC @ 80W	140ms
	230VAC @ 110W	100ms
Efficiency	Multiple outputs	70% typ.
	+5.1V single	70% typ.
	12V and 15V singles	72% typ.
	24V single	75% typ.
Isolation voltage	Input/output	4000VAC
	Input/chassis	1500VAC
Switching frequency	At 100 Watts output	20 to 70kHz
	At zero load	100 to 250kHz
Approvals and standards (See Note 12)	VDE0750, IEC60601 IEC1010, UL2601 CSA C22.2 No. 125	
Weight	Singles	550g (19.4oz)
	Multiple outputs	600g (21.2oz)
MTBF	MIL-HDBK-217E	125,000 hours

ENVIRONMENTAL SPECIFICATIONS

Thermal performance	Operating, see curve	0°C to +70°C
	Non-operating	-40°C to +85°C
	0°C to +50°C, amb. convection cooled	80W
	+50°C to +70°C, amb. convection cooled	Derate 2W/°C
	0°C to +50°C, 20CFM forced air	110W
	+50°C to +70°C, 20CFM forced air	Derate 2.75W/°C
	Peak, 0°C to +50°C, max. 60 seconds	110W
	Relative humidity	Non-condensing 5% to 95% RH
	Altitude	Operating 10,000 feet max. Non-operating 40,000 feet max.
	Vibration (See Note 11)	5Hz to 500Hz 2.4G approx.

NFS110 Medical Series

Single and quad output



LOW TO MEDIUM POWER AC/DC POWER SUPPLIES

80-110W AC/DC Universal Input Switch Mode Power Supplies

2

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

OUTPUT VOLTAGE	OUTPUT CURRENTS			RIPPLE (4)	TOTAL REGULATION (5)	MODEL NUMBERS
	MAX (1)	PEAK (2)	FAN (3)			
+5.1V	8.0A	20.0A	10.0A	50mV	±2.0%	NFS110-7901P
+12.0V	4.5A	9.0A	5.0A	120mV	±3.0%	
-12.0V	0.5A	1.5A	1.0A	120mV	±3.0%	
-5.0V	0.5A	1.5A	1.0A	50mV	±3.0%	
+5.1V (V _A)	8.0A	20.0A	10.0A	50mV	±2.0%	NFS110-7902P
+24.0V (V _B)	3.5A	4.5A	4.5A	240mV	+10/-5.0%	
+12.0V	4.5A	9.0A	5.0A	120mV	±3.0%	
-12V	0.5A	1.5A	1.0A	120mV	±3.0%	
+5.1V	8.0A	20.0A	10.0A	50mV	±2.0%	NFS110-7904P
+15.0V	4.0A	7.5A	5.0A	150mV	±3.0%	
-15V	0.5A	1.5A	1.0A	150mV	±3.0%	
-5V	0.5A	1.5A	1.0A	50mV	±3.0%	
+5.1V (6)	16.0A	22.0A	20.0A	50mV	±2.0%	NFS110-7905 (6,7)
12V (6)	7.0A	9.0A	9.0A	120mV	±2.0%	NFS110-7912 (6,7)
15V (6)	5.0A	7.3A	7.3A	150mV	±2.0%	NFS110-7915 (6,7)
24V (6)	3.5A	4.5A	4.5A	240mV	±2.0%	NFS110-7924 (6,7)

Notes

- 1 Convection cooled, 80W maximum.
- 2 Peak outputs lasting less than 60 seconds with duty cycle less than 10%. Total peak power must not exceed 110W.
- 3 Forced air, 20CFM at 1 atmosphere, 110W maximum.
- 4 Figure is peak-to-peak. Output ripple is measured across a 50MHz bandwidth using a 12 inch twisted pair terminated with a 47µF capacitor.
- 5 Total regulation is defined at the static output regulation at 25°C, including initial tolerance, line voltage within stated limits and output voltages adjusted to their factory settings. Also for NFS110-7902P, for 24V output stated regulation $I_A / I_B \leq 5$. This output will maintain ±5.0% regulation if $I_A \leq 5A$, where $I_A = +5.1V$ output current and $I_B = +24V$ output current.
- 6 Single output models have floating outputs which may be referenced as either positive or negative. Higher voltage supplies, may be adjusted over a wide output voltage range, as long as the total output power does not exceed 80 Watts (natural convection) or 110 Watts (forced air).
- 7 Power fail detect not available on single output models.
- 8 Derating curve is application specific for ambient temperatures > 50°C, for optimum reliability no part of the heatsink should exceed 90°C and no semiconductor case temperature should exceed 100°C.
- 9 Caution: Allow a minimum of 1 second after disconnecting the power when making thermal measurements.
- 10 The user should read the PSU installation instructions in conjunction with the relevant national safety regulations in order to ensure compliance.
- 11 Three orthogonal axes, random vibration, 10 minute test for each axis.
- 12 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

TRANSIENT RESPONSE

NFS110-7901P	+5.1V (7.5A to 10A)	150mV peak, 1ms recovery
	+12V (2.5A to 5A)	100mV peak, 0.5ms recovery
	-12V (0.5A to 1A)	100mV peak, 0.5ms recovery
	-5V (0.5A to 1A)	100mV peak, 0.5ms recovery
NFS110-7902P	+5.1V (7.5A to 10A)	150mV peak, 1ms recovery
	+12V (2.5A to 5A)	100mV peak, 0.5ms recovery
	-12V (0.5A to 1A)	100mV peak, 0.5ms recovery
	24V (1.5A to 3A)	300mV peak, 1ms recovery
NFS110-7904P	+5.1V (7.5A to 10A)	150mV peak, 1ms recovery
	+15V (2.5A to 5A)	100mV peak, 0.5ms recovery
	-15V (0.5A to 1A)	100mV peak, 0.5ms recovery
	-5V (0.5A to 1A)	100mV peak, 0.5ms recovery
NFS110-7905	+5.1V (10A to 20A)	250mV peak, 1ms recovery
NFS110-7912	+12V (4.5A to 9A)	360mV peak, 1ms recovery
NFS110-7915	+15V (3.65A to 7.3A)	450mV peak, 1ms recovery
NFS110-7924	+24V (2.25A to 4.5A)	720mV peak, 1ms recovery

NFS110 Medical Series

Single and quad output



LOW TO MEDIUM POWER AC/DC POWER SUPPLIES

80-110W AC/DC Universal Input Switch Mode Power Supplies

3


For the most current data and application support visit www.artesyn.com/powergroup/products.htm

AC (J1) mating connector

Molex 09-50-3051 or Molex 09-91-0500 mating connector with 2478 or equivalent crimp terminals.

DC (J2) mating connector

Molex 09-50-3131 or Molex 09-91-1300 mating connector with 2478 or equivalent crimp terminals.



Power fail detect signal (See Note 7)



50ms ≤ T1 ≤ 200ms

T2 will vary with line and load

T3 ≥ 3ms

Pout: 110W

PFD output is an open collector which will sink ≤ 40mA in the low state

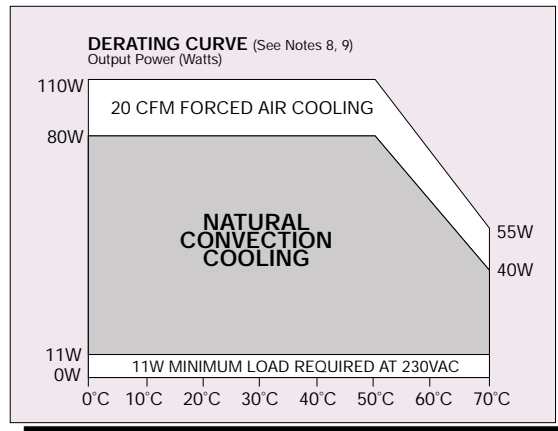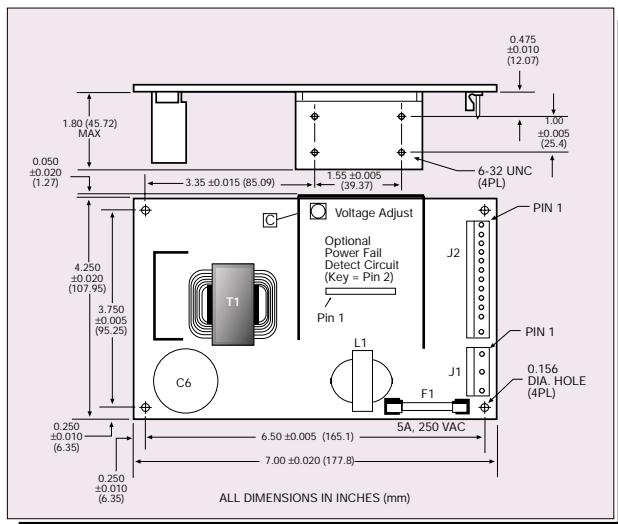

Mechanical Notes

- A Metallic or non-metallic stand-offs (maximum diameter 5.4mm) can be used in all four mounting holes without affecting safety approval.
- B The ground pad of the mounting hole near J1 allows system grounding through a metal stand-off to the system chassis.
- C The heatsink is grounded, and allows system grounding by mechanical connection to the system chassis.
- D The supply must be mechanically supported using the PCB mounting holes and may be additionally supported by the heatsink mounting holes.
- E It is always advisable to attach the power supply heatsink to another thermal dissipator (such as a chassis or finned heatsink etc). The resulting decrease in heat sink mounted component temperatures will improve power supply lifetime.
- F A standard L-bracket and cover is available for mounting which contains all screws connectors and necessary mounting hardware. Two different kits are available, order part number 'NFS110 COVER KIT' or 'NFS110C'.

International Safety Standard Approvals

VDE0750/EN60601-1/IEC601/IEC1010 File No. 10401-3336-1049
licence No. 2874

UL2601 File No. E147937

CSA C22.2 No. 125 File No. LR41062C

PIN CONNECTIONS

J1	-7901P	-7902P	-7904P	SINGLES
Pin 1	AC Ground	AC Ground	AC Ground	AC Ground
Pin 2	AC Neutral	AC Neutral	AC Neutral	AC Neutral
Pin 3	AC Line	AC Line	AC Line	AC Line
J2				
Pin 1	+5.1V	+5.1V	+5.1V	V _{out}
Pin 2	+5.1V	+5.1V	+5.1V	V _{out}
Pin 3	+5.1V	+5.1V	+5.1V	V _{out}
Pin 4	Return	Return	Return	Return
Pin 5	Return	Return	Return	Return
Pin 6	Return	Return	Return	Return
Pin 7	Return	Return	Return	Return
Pin 8	+12V	+12V	+15V	V _{out}
Pin 9	+12V	+12V	+15V	V _{out}
Pin 10	PFD	PFD	PFD	N/C
Pin 11	-12V	-12V	-15V	N/C
Pin 12	Removed for Key			
Pin 13	-5V	+24V	-5V	N/C

N/C = no connection.

Data Sheet © Artesyn Technologies® 2002

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

www.artesyn.com

File Name: NFS110M.PDF Rev: 01 Jan 2000