


MODEL EBT156 Edgeboard Connectors

Single Readout

Dip Solder, Eyelet and Wire Wrap™ Termination

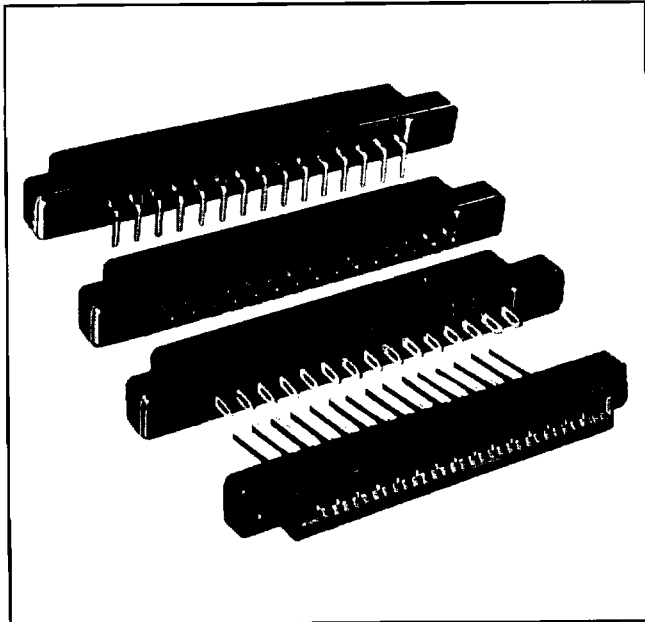

FEATURES

- .156" [3.96mm] C-C
- Modified tuning fork contacts have chamfered lead-in to reduce wear on printed circuit board contacts without sacrificing contact pressure and wiping action
- Accepts PC board thickness of .054" to .070" [1.37mm to 1.78mm]
- Polarization on or between contact position in all sizes. Between contact polarization permits polarizing without loss of a contact position.
- Polarizing key is reinforced nylon, may be inserted by hand, requires no adhesive
- Protected entry, provided by recessed leading edge of contact, permits the card slot to straighten and align the board before electrical contact is made. Prevents damage to contacts which might be caused by warped or out of tolerance boards.
- Optional terminal configurations, including eyelet (Type A), dip-solder (Types B, C, D, R), Wire Wrap™ (Types E, F)
- Connectors with Type A, B, C, D or R contacts are recognized under the Component Program of Underwriters Laboratories, Inc. Listed under File 65524, Project 77CH3889.

ELECTRICAL SPECIFICATIONS

Current Rating: 5 amps.

Test Voltage Between Contacts:

At Sea Level: 1800 V RMS.

At 70,000 feet [21,336 meters]: 450 V RMS.

Insulation Resistance: 5000 Megohm minimum.

Contact Resistance: (Voltage Drop) 30 millivolts maximum at rated current with gold flash.

PHYSICAL SPECIFICATIONS

Number of Contacts: 6, 10, 12, 15, 18 or 22.

Contact Spacing: .156" [3.96mm].

Card Thickness: .054" to .070" [1.37mm to 1.78mm].

Card Slot Depth: .330" [8.38mm].

APPLICATIONS

For use with .062" [1.57mm] printed circuit boards requiring an edgeboard type connector on .156" [3.96mm] centers.

MATERIAL SPECIFICATIONS

Body: Glass-filled phenolic per MIL-M-14, Type MFH, black, flame retardant (UL 94V-0).

Contacts: Copper alloy.

Finish: 1 = Electro tin plated. 2 = Gold flash.

Polarizing Key: Glass-filled nylon.



Optional Threaded Mounting Insert: Nickel plated brass (Type Y).

Optional Floating Mounting Bushing: Cadmium plated brass (Type Z).



MOUNTING VARIATIONS [Numbers in brackets indicate millimeters]

Type "W" No Mounting Flange	Type "X" Clearance Hole	Type "Y" Threaded Insert	Type "Z" Floating Bushing

DIMENSIONAL CONFIGURATIONS [Numbers in brackets indicate millimeters]

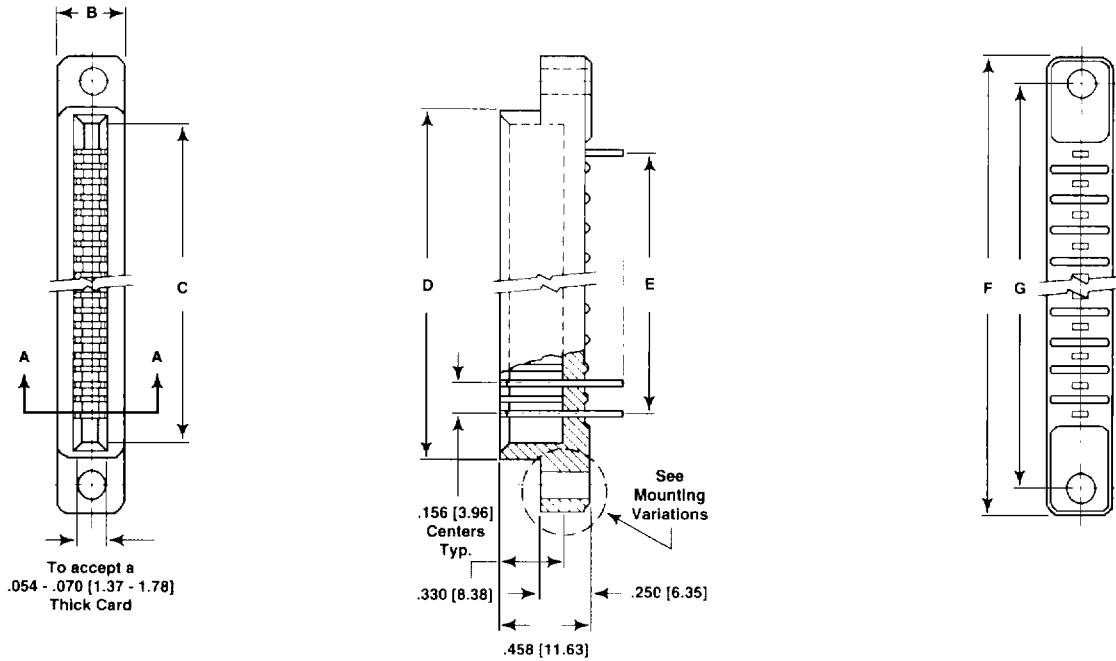

Section A-A

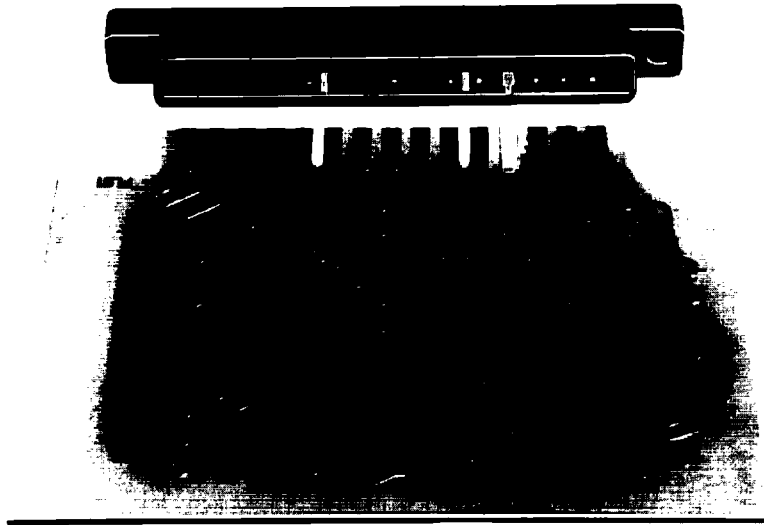



Between contact or on contact polarization available in all sizes for factory or field insertion.

NUMBER OF CONTACT POSITIONS	B	C	D	E	F	G
6	.340 [8.64]	1.10 [27.94]	1.24 [31.50]	.781 [19.84]	1.80 [45.72]	1.53 [38.86]
10	.340 [8.64]	1.72 [43.69]	1.86 [47.24]	1.41 [35.81]	2.43 [61.72]	2.16 [54.86]
12	.340 [8.64]	2.04 [51.82]	2.18 [55.37]	1.72 [43.69]	2.74 [69.60]	2.47 [62.74]
15	.340 [8.64]	2.50 [63.50]	2.65 [67.31]	2.19 [55.63]	3.21 [81.53]	2.94 [74.68]
18	.340 [8.64]	2.97 [75.44]	3.11 [78.99]	2.66 [67.56]	3.68 [93.47]	3.41 [86.61]
22	.340 [8.64]	3.60 [91.44]	3.74 [95.0]	3.28 [83.31]	4.30 [109.22]	4.03 [102.36]








MODEL EBT156

POLARIZING KEYS [Numbers in brackets indicate millimeters]

When ordering polarizing keys individually, specify by Model Number **PK156** or **PKC156**.

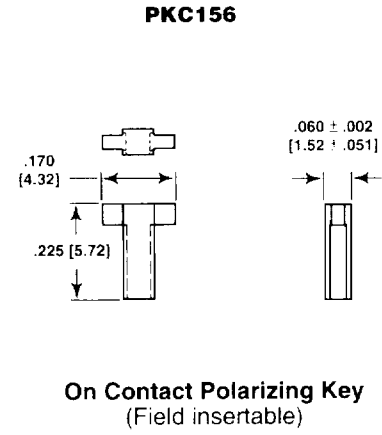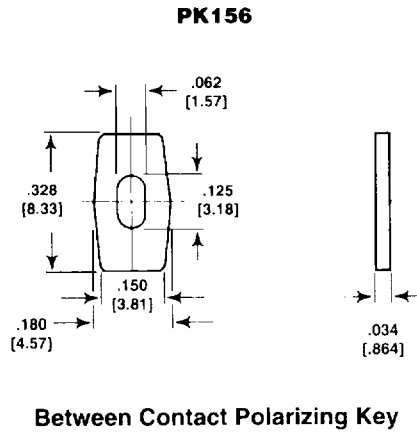

TERMINAL VARIATIONS [Numbers in brackets indicate millimeters]



HOW TO ORDER

EBT156	10	A	1	X	A, J	A9, J9
MODEL	CONTACTS	CONTACT TERMINAL VARIATIONS	CONTACT FINISH	MOUNTING VARIATIONS	BETWEEN CONTACT POLARIZATION	ON CONTACT POLARIZATION

6, 10, 12,
15, 18, 22

A, B, C, D
E, F, R

1 = Electro Tin Plated
2 = Gold Flash

W, X,
Y, Z

Required **only** when polarizing key(s) are to be **factory installed**.
Polarization key positions: Between contact polarization key(s) are located to the right of the contact position(s) desired. Example: **A, J** means keys between **A** and **B**, and **J** and **K**.

Required **only** when polarizing key(s) are to be **factory installed**. Polarization key replaces contact. When polarizing key(s) replaces contact(s), indicate by adding suffix "9" to contact position(s) desired. Example: **A9, J9** means keys replace terminals **A** and **J**.