

Low Current LED Lamps

Technical Data

HLMP-4700, -4719, -4740
HLMP-1700, -1719, -1790
HLMP-7000, -7019, -7040

Features

- Low Power
- High Efficiency
- CMOS-MOS Compatible
- TTL Compatible
- Wide Viewing Angle
- Choice of Package Styles
- Choice of Colors


Applications

- Low Power DC Circuits
- Telecommunications Indicators


- Portable Equipment
- Keyboard Indicators

Description


These tinted diffused LED lamps were designed and optimized specifically for low DC current operation. Luminous intensity and forward voltage are tested at 2 mA to assure consistent brightness at TTL output current levels.




Package Dimensions

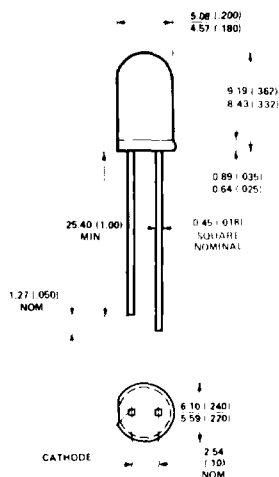

HLMP-4700, -4719, -4740

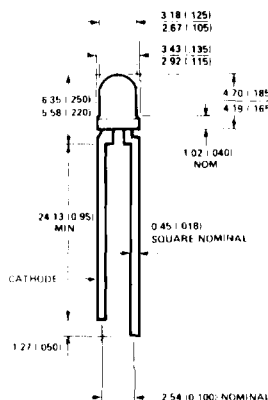

HLMP-1700, -1719, -1790

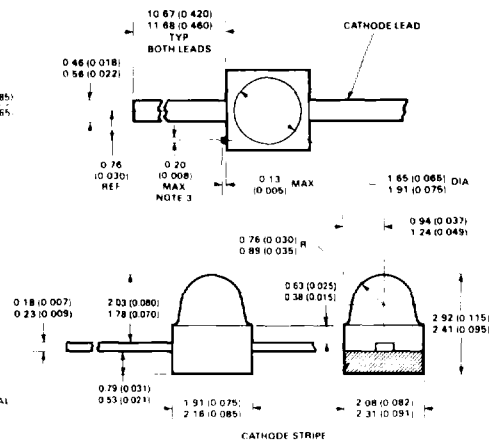

HLMP-7000, -7019, -7040

- NOTES:**
1. ALL DIMENSIONS ARE IN MILLIMETRES (INCHES)
 2. AN EPOXY MINISCUS MAY EXTEND ABOUT 1 mm (0.040") DOWN THE LEADS
 3. PROTRUDING SUPPORT TAB IS CONNECTED TO CATHODE LEAD

Low Current Lamp Selection Guide

Size	Color		
	Red HLMP-	Yellow HLMP-	Green HLMP-
T-1 ^{3/4}	4700	4719	4740
T-1	1700	1719	1790
Subminiature	7000	7019	7040

Axial Luminous Intensity and Viewing Angle @ 25°C

Part Number HLMP-	Package Description	Color	I _v (mcd) @ 2 mA DC		2θ _{1/2} ⁽¹⁾	Package Outline
			Min.	Typ.		
4700	T-1 ^{3/4} Tinted Diffused	Red	1.2	2.0	50°	A
4719		Yellow	1.2	1.8		
4740		Green	1.2	1.8		
1700	T-1 Tinted Diffused	Red	1.0	1.8	50°	B
1719		Yellow	1.0	1.6		
1790		Green	1.0	1.6		
7000	Subminiature Tinted Diffused	Red	0.4	0.8	90°	C
7019		Yellow	0.4	0.6		
7040		Green	0.4	0.6		

Note:

1. θ_{1/2} is the typical off-axis angle at which the luminous intensity is half the axial luminous intensity.

Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

Symbol	Description	T-1 ^{3/4}	T-1	Sub-miniature	Min.	Typ.	Max.	Units	Test Conditions
V_F	Forward Voltage	4700 4719 4740	1700 1719 1790	7000 7019 7040		1.8 1.9 1.8	2.0 2.5 2.2	V	2 mA
V_R	Reverse Breakdown Voltage	4700 4719 4740	1700 1719 1790	7000 7019 7040	5.0 5.0 5.0			V	$I_R = 50 \mu\text{A}$
λ_d	Dominant Wavelength	4700 4719 4740	1700 1719 1790	7000 7019 7040		626 585 569		nm	Note 1
$\Delta\lambda_{1/2}$	Spectral Line Halfwidth	4700 4719 4740	1700 1719 1790	7000 7019 7040		40 36 28		nm	
τ_s	Speed of Response	4700 4719 4740	1700 1719 1790	7000 7019 7040		90 90 500		ns	
C	Capacitance	4700 4719 4740	1700 1719 1790	7000 7019 7040		11 15 18		pF	$V_F = 0$, $f = 1 \text{ MHz}$
$R\theta_{J-PIN}$	Thermal Resistance	4700 4719 4740	1700 1719 1790	7000 7019 7040		260 ^[3] 290 ^[4] 170 ^[5]		$^\circ\text{C/W}$	Junction to Cathode Lead
λ_{PEAK}	Peak Wavelength	4700 4719 4740	1700 1719 1790	7000 7019 7040		635 583 565		nm	Measurement at peak
η_V	Luminous Efficacy	4700 4719 4740	1700 1719 1790	7000 7019 7040		145 500 595		<u>lumens</u> watt	Note 2

Notes:

1. The dominant wavelength, λ_d , is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
2. The radiant intensity, I_e , in watts per steradian, may be found from the equation $I_e = I_v/\eta_V$, where I_v is the luminous intensity in candelas and η_V is luminous efficacy in lumens/watt.
3. T-1^{3/4}.
4. T-1.
5. Subminiature.

Absolute Maximum Ratings

Parameter	Maximum Rating		Units
Power Dissipation (Derate linearly from 92°C at 1.0 mA/°C)	Red Yellow Green	24 36 24	mW
DC and Peak Forward Current	7		mA
Transient Forward Current (10 μ s Pulse) ^[1]	500		mA
Reverse Voltage ($I_R = 50 \mu$ A)	5.0		V
Operating Temperature Range	Red/Yellow Green	-55°C to 100°C -20°C to 100°C	
Storage Temperature Range	-55°C to +100°C		
Lead Soldering Temperature [1.6 mm (0.063 in.) from body]	260°C for 5 seconds (T-1, T-1 $\frac{3}{4}$) 260°C for 5 seconds (Subminiature)		

Note:

1. The transient peak current is the maximum non-recurring peak current the devices can withstand without damaging the LED die and wire bonds. It is not recommended that the device be operated at peak currents beyond the Absolute Maximum Peak Forward Current.

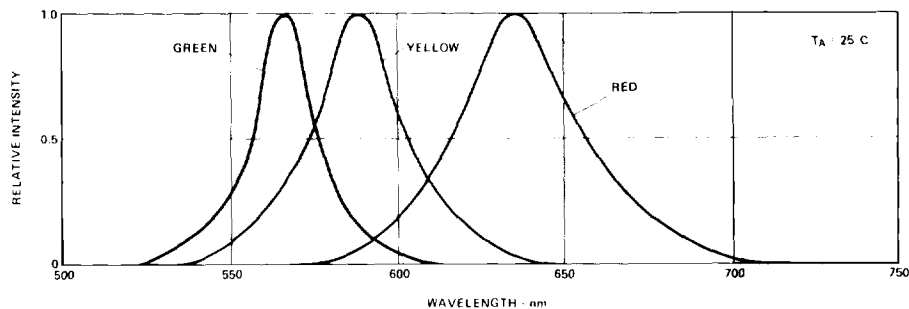


Figure 1. Relative Intensity vs. Wavelength.

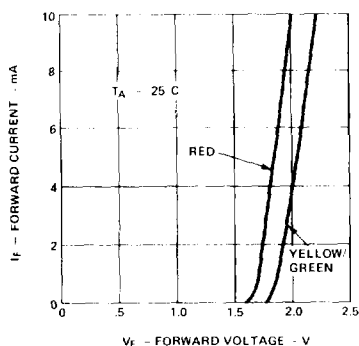


Figure 2. Forward Current vs. Forward Voltage.

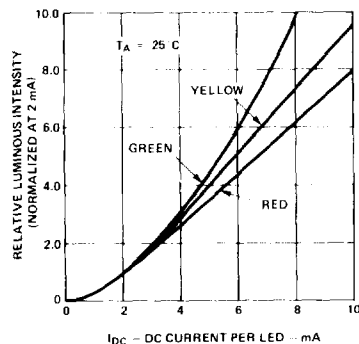


Figure 3. Relative Luminous Intensity vs. Forward Current.

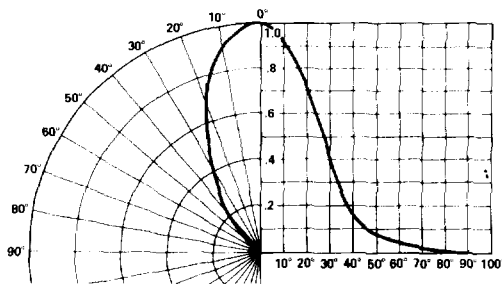


Figure 4. Relative Luminous Intensity vs. Angular Displacement for T-1^{3/4} Lamp.

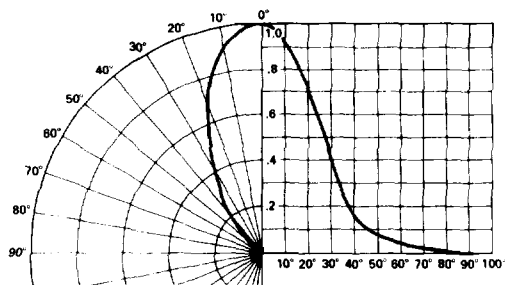


Figure 5. Relative Luminous Intensity vs. Angular Displacement for T-1 Lamp.

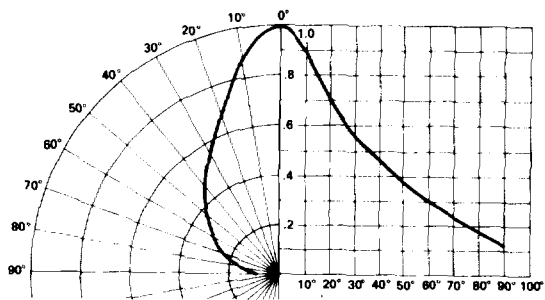


Figure 6. Relative Luminous Intensity vs. Angular Displacement for Subminiature Lamp.