

FEATURES

- ◆ RoHS compliant
- ◆ Efficiency up to 84%
- ◆ SIP7 Package
- ◆ Wide temperature performance at full 2 Watt load, -40°C ~ 85°C
- ◆ UL 94V-0 package material
- ◆ No heat sink required
- ◆ Small Footprint
- ◆ Industry standard pin out
- ◆ Power sharing on output
- ◆ 1KVDC isolation
- ◆ Continuous Short Circuit Protection
- ◆ Internal SMD construction
- ◆ No external components required
- ◆ MTTF up to 1.5 million hours

MODEL SELECTION

IB^①05^②05^③X^④S^⑤-2W^⑥

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Fixed Input
- ⑤ SIP7 Package
- ⑥ Rated Power

APPLICATIONS

The IB_XS-2W series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) where the voltage of the input power supply is fixed (voltage variation $\leq \pm 5\%$);
- 2) where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) where the regulation of the output voltage and the output ripple noise are demanded.

SELECTION GUIDE

Order code	Input		Output			Efficiency (% Typ)	Switching Frequency (KHz, Typ)
	Voltage(VDC)		Voltage (VDC)	Current(MA)			
	Nominal	Range		Max	Min		
IB0505XS-2W	5	4.75-5.25	5	400	40	70	100
IB0512XS-2W	5	4.75-5.25	12	167	17	78	96
IB0515XS-1W5	5	4.75-5.25	15	100	10	75	97
IB1205XS-2W	12	11.4-12.6	5	400	40	71	55
IB1215XS-1W5	12	11.4-12.6	15	100	10	76	90
IB1215XS-2W	12	11.4-12.6	15	133	13	76	87
IB1505XS-2W	15	14.25-15.	5	400	40	71	67
IB2405XS-2W	24	22.8-25.2	5	400	40	71	67
IB2415XS-2W	24	22.8-25.2	15	133	13	75	65

ISOLATION SPECIFICATIONS

Parameter	Test conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 minute and 1mA max	1000			VDC
Isolation resistance	Test at Viso=500VDC	1000			MΩ

OUTPUT SPECIFICATIONS

Parameter	Test conditions	Min	Typ.	Max.	Units
Output power		0.2		2	W
Line regulation	For Vin change of $\pm 5\%$			± 0.25	%
Load regulation	10% to 100% full load			± 1.5	%
Output voltage accuracy	100% full load			± 3	%
Temperature drift	100% full load			0.03	%/°C
Output Ripple*	20MHz Bandwidth		20	30	MV p-p
Output Noise*	20MHz Bandwidth		50	100	MV p-p
Switching frequency	Full load, nominal input		100		Khz

* Test ripple and noise by "parallel cable" method.



See detailed operation instructions at Testing of Power Converter section, application notes.



CE REACH
MICRODC RESERVES THE COPYRIGHT

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Storage humidity range				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	°C
Lead temperature	1.5mm from case for 10 seconds		20	30	°C
Temp.rise at full load				300	°C
Cooling	Free air convection				
Case material	Plastic(UL94-V0)				
Short circuit protection	Continuous				
MTBF		3500		1*	S
Weight			2.8		g

*Supply voltage must be discontinued at the end of short circuit duration.

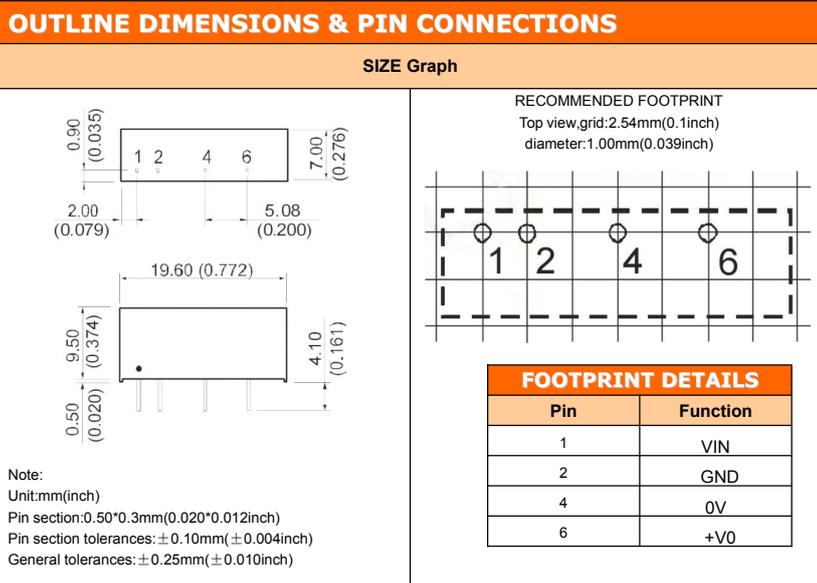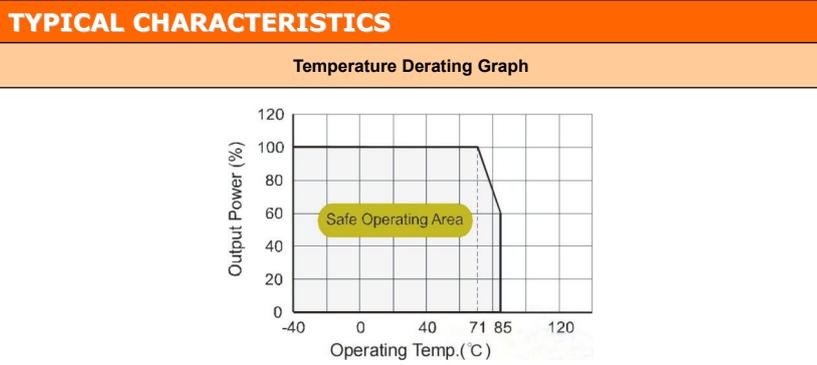


All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified. Another 24V products, please inquire Our technical department!

Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is not less than 10% of the full load, and that this product should never be operated under no load! If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.

Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

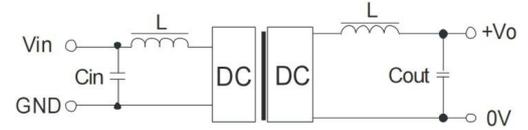

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (μF)	Vout (VDC)	Cout (μF)
5	4.7	5	4.7
12	2.2	-	-
15	1.0	-	-
24	0.47	-	-

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short - circuits . The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series (Figure 2).



(Figure 2)

When the environment temperature is higher than 71°C, the product output power should be less then 60% of the rated power.

No parallel connection or plug and play.

Use dual output simultaneously, forbid opening output pin (0V) to use as single output.