


DELPHI SERIES



FEATURES

- Efficiency up to 80%
- Industry standard form factor and pinout
- Body size:
 - 5V & 12V:
11.5 x6.1 x10.2mm (0.45" x0.24" x0.40")
 - 24V:
11.5 x7.1 x10.2mm (0.45" x0.28" x0.40")
- Input: 5V, 12V, 24V
- Output: 5, 9, 12, 15V
- 1000V isolation
- UL 94V-0 Package Material
- ISO 9001 and ISO14001 certified manufacturing facility

Delphi DBU100 Series DC/DC Power Modules: 5, 12, 24Vin, 1W 4-pin SIP

The Delphi DBU100, 5V, 12V, and 24V input, single output, 4-pin SIP form factor, isolated DC/DC converter is the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc. The DBU100 series operate from 5V, 12V, or 24V ($\pm 10\%$) and provides 5V, 9V, 12V, or 15V of single output in an industrial standard, plastic case encapsulated 4-pin ultra miniature SIP package taking up as little as 0.18 square inches of board space. This series provides up to 1W of output power with 1000V isolation and a typical full-load efficiency up to 80%. With creative design technology and optimization of component placement, these converters possess outstanding electrical and thermal performance, as well as extremely high reliability under highly stressful operating conditions.

OPTIONS

APPLICATIONS

- Industrial
- Transportation
- Process/ Automation

TECHNICAL SPECIFICATIONS

T_A = 25°C, airflow rate = 0 LFM, nominal Vin, nominal Vout, resistive load unless otherwise noted.

PARAMETER	NOTES and CONDITIONS	DBU100 (Standard)			
		Min.	Typ.	Max.	Units
ABSOLUTE MAXIMUM RATINGS					
Input Voltage					
Transient	5V input model, 1000ms	-0.7		9	Vdc
Transient	12V input model, 1000ms	-0.7		18	Vdc
Transient	24V input model, 1000ms	-0.7		30	
Internal Power Dissipation				450	mW
Operating Temperature	Ambient	-40		85	°C
	Case	-40		100	°C
Storage Temperature		-40		125	°C
Humidity				95	%
Lead Temperature in Assembly	1.5mm from case for 10 seconds			260	°C
Input/Output Isolation Voltage		1000			Vdc
INPUT CHARACTERISTICS					
Operating Input Voltage	5V input model	4.5	5	5.5	Vdc
	12V input model	10.8	12	13.2	Vdc
	24V input model	21.6	24	26.4	Vdc
Maximum Input Current	Please see Model List table on page 6				
No-Load Input Current	5V model		30		mA
	12V model		13		mA
	24V model		7		mA
Reverse Polarity Input Current				0.3	A
OUTPUT CHARACTERISTICS					
Output Voltage Set Point Accuracy			±1.0	±3.0	%
Output Voltage Regulation					
Over Load	I _o =20% to 100%, please see page 6				
Over Line	For Vin change of 1%		±1.2	±1.5	%
Over Temperature	T _c =-40°C to 100°C		±0.01	±0.02	%/C
Output Voltage Ripple and Noise	5Hz to 20MHz bandwidth				
Peak-to-Peak	Full Load, 0.33µF ceramic		100	150	mV
Peak-to-Peak, over line, load, temperature	Full Load, 0.33µF ceramic			200	mV
RMS	Full Load, 0.33µF ceramic			5	mV
Output Short Circuit				0.5	Second
Maximum Output Capacitance	Single output models			33	µF
EFFICIENCY					
100% Load	Please see Model List table on page 6				
ISOLATION CHARACTERISTICS					
Isolation Voltage	Input to output, 60 Seconds	1000			Vdc
Isolation Voltage Test	Flash Test for 1 seconds	1100			Vdc
Isolation Resistance	500VDC	1000			MΩ
Isolation Capacitance	100KHz, 1V		60	100	pF
FEATURE CHARACTERISTICS					
Switching Frequency		50	90	110	kHz
GENERAL SPECIFICATIONS					
MTBF	MIL-HDBK-217F; T _A =25°C, Ground Benign	2			M hours
Weight	5V and 12V models		1.3		grams
	24V models		1.7		grams
Case Material	Non-conductive black plastic				
Flammability	UL94V-0				
Input Fuse	5V model, 500mA slow blown type				
	12V model, 200mA slow blown type				
	24V model, 100mA slow blown type				

Notes:

1. These power converters require a minimum output load to maintain specified regulation (please see page 6 for the suggested minimum load). Operation under no-load conditions will not damage these modules; however, they may not meet all specifications listed above.
2. These DC/DC converters should be externally fused at the front end for protection.



ELECTRICAL CHARACTERISTICS CURVES

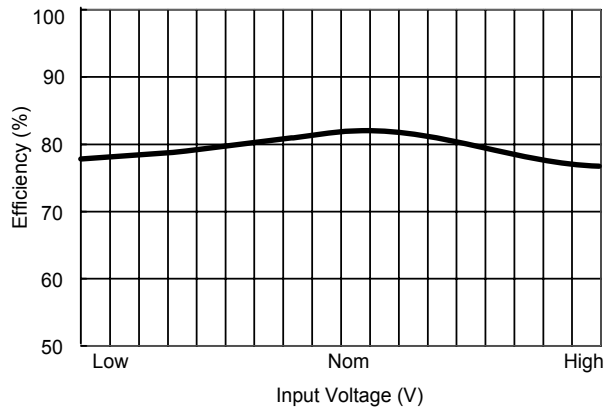


Figure 1: Efficiency vs. Input Voltage (Single Output)

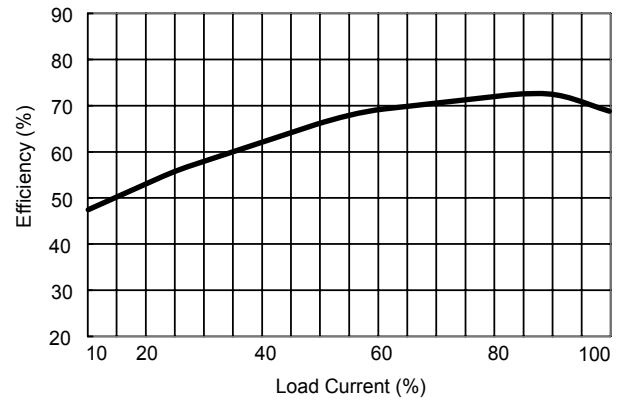


Figure 2: Efficiency vs. Output Load (Single Output)

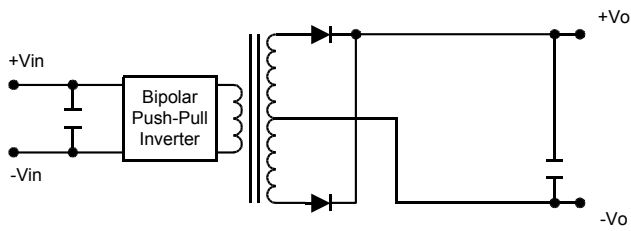



Figure 3: Block diagram of DBU100 single output modules

Design & Feature Considerations

The DBU100 circuit block diagrams are shown in Figure 3.


Peak-to-Peak Output Noise Measurement

Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter. A C_{out} of 0.33 μ F ceramic capacitor is placed between the terminals shown below.

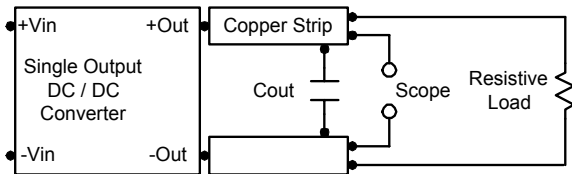

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.

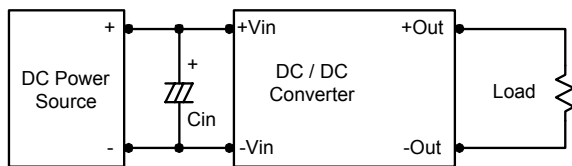

In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the input of the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance ($ESR < 1.0\Omega$ at 100 KHz) capacitor of a 1.5 μ F for the 5V input devices, a 1.0 μ F for the 12V input devices, and a 0.47 μ F for the 24V devices.


Maximum Capacitive Load

The DAU100 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 33 μ F maximum capacitive load for DBU100 series.

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance.

To reduce output ripple, it is recommended to use 1.0 μ F capacitors at the output.

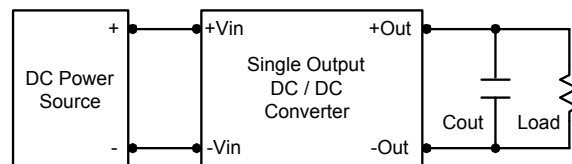

Soldering and Cleaning Considerations

Post solder cleaning is usually the final board assembly process before the board or system undergoes electrical testing. Inadequate cleaning and/or drying may lower the reliability of a power module and severely affect the finished circuit board assembly test. Adequate cleaning and/or drying is especially important for un-encapsulated and/or open frame type power modules. For assistance on appropriate soldering and cleaning procedures, please contact Delta's technical support team.



THERMAL CONSIDERATIONS


Thermal management is an important part of the system design. To ensure proper, reliable operation, sufficient cooling of the power module is needed over the entire temperature range of the module. Convection cooling is usually the dominant mode of heat transfer.

Hence, the choice of equipment to characterize the thermal performance of the power module is a wind tunnel.

Thermal Testing Setup

Delta's DC/DC power modules are characterized in heated vertical wind tunnels that simulate the thermal environments encountered in most electronics equipment. This type of equipment commonly uses vertically mounted circuit cards in cabinet racks in which the power modules are mounted.

The following figure shows the wind tunnel characterization setup. The power module is mounted on a test PWB and is vertically positioned within the wind tunnel. The space between the facing PWB and PWB is constantly kept at 25.4mm (1").

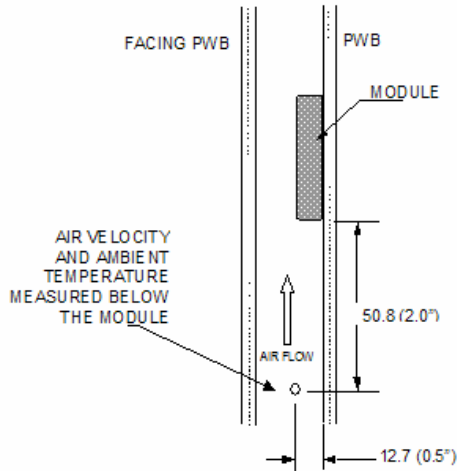

Note: Wind Tunnel Test Setup Figure Dimensions are in millimeters and (Inches)

Figure 4: Wind tunnel test setup

Thermal Derating

Heat can be removed by increasing airflow over the module. To enhance system reliability, the power module should always be operated below the maximum operating temperature. If the temperature exceeds the maximum module temperature, reliability of the unit may be affected.

THERMAL CURVES

DBU100series Output Current vs. Ambient Temperature and Air Velocity (Either Orientation)

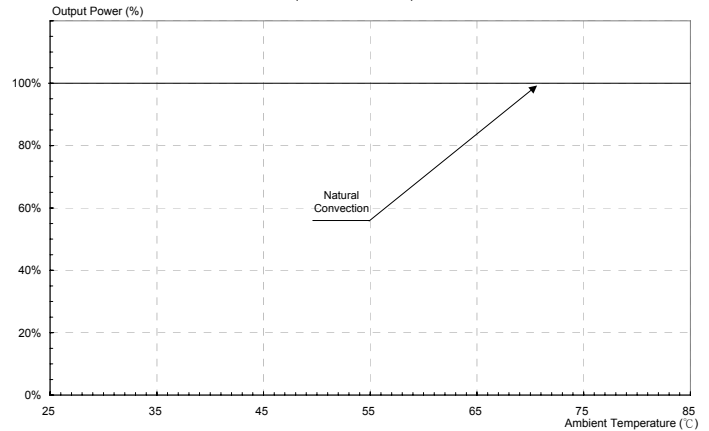



Figure 5: Derating Curve




MODEL LIST

	INPUT		OUTPUT			Full Load Efficiency	Load Regulation
	Vdc (V)	Max (mA)	Vdc (V)	Max (mA)	Min (mA)	%	%
DBU101	5 (4.5 ~ 5.5)	290	5	200	4	69	11
DBU102		260	9	110	2	76	8
DBU103		262	12	84	1.5	77	7
DBU104		258	15	67	1	78	6
DBU111	12 (10.8 ~ 13.2)	117	5	200	4	71	9
DBU112		107	9	110	2	77	5
DBU113		106	12	84	1.5	79	5
DBU114		105	15	67	1	80	4
DBU121	24 (21.6 ~ 26.4)	60	5	200	4	70	8
DBU122		54	9	110	2	76	5
DBU123		53	12	84	1.5	79	4
DBU124		53	15	67	1	79	4

MECHANICAL DRAWING

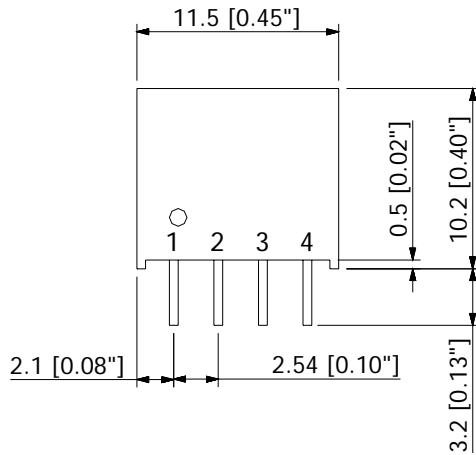

SIDE VIEW

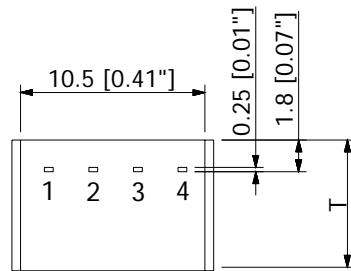

BOTTOM VIEW

NOTES:
 DIMENSIONS ARE IN MILLIMETERS AND (INCHES)
 TOLERANCES: X.Xmm±0.5mm(X.XX in.±0.02 in.)
 X.XXmm±0.25mm(X.XXX in.±0.010 in.)

Pin	Function
1	-Vin
2	+Vin
3	-Vout
4	+Vout

Case Size:

(5 & 12V Input)
 11.5x6.1x10.2mm
 0.45x0.24x0.40inches

(24V Input)
 11.5x7.1x10.2mm
 0.45x0.28x0.40inches

CONTACT: www.delta.com.tw/dcdc

USA:

Telephone:
 East Coast: (888) 335 8201
 West Coast: (888) 335 8208
 Fax: (978) 656 3964
 Email: DCDC@delta-corp.com

Europe:

Phone: +41 31 998 53 11
 Fax: +41 31 998 53 53
 Email: DCDC@delta-es.com

Asia & the rest of world:

Telephone: +886 3 4526107 ext 6220~6224
 Fax: +886 3 4513485
 Email: DCDC@delta.com.tw

WARRANTY

Delta offers a two (2) year limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta. Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.