


FL7M Series

Rigid structure, highly waterproof DC 2-wire sensors with improved visibility of indicator lamps.

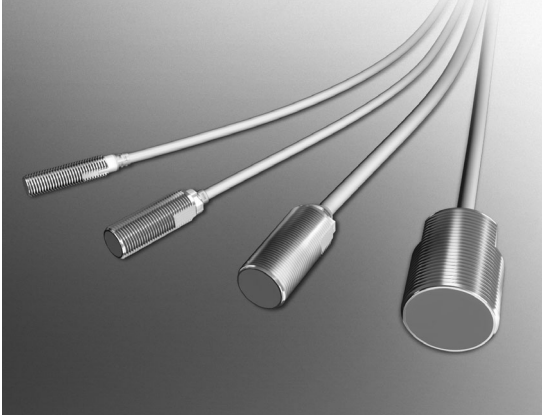

- DC 2-wire, for reduced wiring costs.
- Stable sensing area is shown by the setting indicator
- Rigid housing allows higher mounting torque.
- Firefly glow indicator lamp can be seen from any direction
- Lowest current consumption in the industry: 0.55mA
- Sealed to IP67G
- Fastest response time in the industry: 2kHz

ORDER GUIDE

● Polarity type


Preleaded types

Exterior		Sensing distance	Operation mode	Setting indicator	Oil-resistant cable	Catalog listing
Appearance	Size(O.D.)					
(cable length 2m) 	M8	2mm	N.O.	●	●	FL7M-2J6HD
			N.C.	●	●	FL7M-2K6H
	M12	3mm	N.O.	●	●	FL7M-3J6HD
			N.C.	●	●	FL7M-3K6H FL7M-3K6HG (long body)
	M18	7mm	N.O.	●	●	FL7M-7J6HD
			N.C.	●	●	FL7M-7K6H
	M30	10mm	N.O.	●	●	FL7M-10J6D
			N.C.	●	●	FL7M-10K6

Preleaded connector types


Exterior		Sensing distance	Operation mode	Setting indicator	Oil resistant, flexible cable	Connector		Catalog listing
Appearance	Size(O.D.)					+	-	
(cable length 30cm) 	M8	2mm	N.O.	●	●	1	4	FL7M-2J6HD-CN03
			N.O.	●	●	4	3	FL7M-2J6HD-CN03A
			N.C.	●	●	1	2	FL7M-2K6H-CN03
	M12	3mm	N.O.	●	●	1	4	FL7M-3J6HD-CN03
			N.O.	●	●	4	3	FL7M-3J6HD-CN03A
			N.C.	●	●	1	2	FL7M-3K6H-CN03
	M18	7mm	N.O.	●	●	1	4	FL7M-7J6HD-CN03
			N.O.	●	●	4	3	FL7M-7J6HD-CN03A
			N.C.	●	●	1	2	FL7M-7K6H-CN03
	M30	10mm	N.O.	●	●	1	4	FL7M-10J6D-CN03
			N.O.	●	●	4	3	FL7M-10J6D-CN03A
			N.C.	●	●	1	2	FL7M-10K6-CN03

Connector types


Exterior		Sensing distance	Operation mode	Setting indicator	Connector		Catalog listing
Appearance	Size(O.D.)				+	-	
	M12	3mm	N.O.	●	1	4	FL7M-3J6HD-CN
			N.O.	●	4	3	FL7M-3J6HD-CNA
			N.C.		1	2	FL7M-3K6H-CN
	M18	7mm	N.O.	●	1	4	FL7M-7J6HD-CN
			N.O.	●	4	3	FL7M-7J6HD-CNA
			N.C.		1	2	FL7M-7K6H-CN
	M30	10mm	N.O.	●	1	4	FL7M-10J6D-CN
			N.O.	●	4	3	FL7M-10J6D-CNA
			N.C.		1	2	FL7M-10K6-CN

● No-polarity type




Preleaded types

Exterior		Sensing distance	Operation mode	Setting indicator	Oil-resistant cable	Catalog listing
Appearance	Size(O.D.)					
	M12	3mm	N.O.	●	●	FL7M-3W6HDT
	M18	7mm	N.O.	●	●	FL7M-7W6HDT
	M30	10mm	N.O.	●	●	FL7M-10W6DT

Preleaded connector types

Exterior		Sensing distance	Operation mode	Setting indicator	Oil resistant, flexible cable	Connector		Catalog listing
Appearance	Size(O.D.)					No-polarity		
	M12	3mm	N.O.	●	●	3 - 4	FL7M-3W6HDT-CN03	
	M18	7mm	N.O.	●	●	3 - 4	FL7M-7W6HDT-CN03	
	M30	10mm	N.O.	●	●	3 - 4	FL7M-10W6DT-CN03	

● Accessories (sold separately)

Name	Appearance	O.D.	Catalog listing
Mounting bracket		For M12	FL-PA112
		For M18	FL-PA118
		For M30	FL-PA130
Protective cover		For M12	FL-PA12
		For M18	FL-PA18
		For M30	FL-PA30
Spatter-guarded protective cover		For M8	FL-PA08W
		For M12	FL-PA12W
		For M18	FL-PA18W
		For M30	FL-PA30W

SPECIFICATIONS

● Preleaded and preleaded connector types


Catalog listing		FL7M-2□6H(D) (-CN03)	FL7M-3□6H(D)(T) (-CN03)	FL7M-7□6H(D)(T) (-CN03)	FL7M-10□6(D)(T) (-CN03)
Actuation method		High-frequency oscillation			
Rated sensing distance		2 ±0.2mm	3 ±0.3mm	7 ±0.7mm	10 ±1mm
Usable sensing distance		0 to 1.4mm	0 to 2.1mm	0 to 4.9mm	0 to 7.0mm
Standard target object		8 x 8 x 1mm iron	12 x 12 x 1mm iron	18 x 18 x 1mm iron	30 x 30 x 1mm iron
Differential travel		15% max. of sensing distance			
Rated supply voltage		12/24Vdc			
Operating voltage range		10 to 30Vdc			
Leakage current		0.55mA max.			
Control output	Switching current	3 to 100mA			
	Voltage drop	polarity type: 3V max. (with 100mA switching current, 2m cable). No-polarity type: 5V max. (with 100mA switching current, 2m cable)			
	Output dielectric strength	30Vdc.			
Operating frequency		2kHz	1.5kHz	500Hz	
Temperature drift		±15% max. of sensing distance for the -25 to +70°C range, taking +25°C as the standard temp.	±10% max. of sensing distance for the -25 to +70°C range, taking +25°C as the standard temp.		
Supply voltage drift		±1% max. of sensing distance with ±15% voltage fluctuation, taking rated supply voltage as standard voltage			
Indicator lamps		N.O. type: Operation indication: lights up (orange or green) upon output Setting indication: lights up (green) in stable sensing area N.C. type: Operation indication: orange light goes out in sensing area			
Operating temperature		-25 to +70°C			
Insulation resistance		50MΩmin. (by 500Vdc megger)			
Dielectric strength		1,000Vac, 50/60Hz for 1 minute			
Vibration resistance		10 to 55Hz, 1.5mm peak-to-peak amplitude, 2 hrs each in X, Y and Z directions			
Shock resistance		980m/s ² 10 times each in X, Y and Z directions			
Protective structure		IP67 (IEC standard), IP67G (JEM standard)			
Weight (main unit with 2 m preleaded cable)		Approx. 50g	Approx. 60g	Approx. 130g	Approx. 230g
Circuit protection		Surge absorption, load short-circuit protection, reverse connection protection circuit			
Wiring method		Preleaded connector (30cm cable standard), preleaded (2m cable standard)			
Material	Sensor	Case	SUS	Ni-plated brass	
		Sensing face	PBT		
	Connector	Housing	Polyester elastomer		
		Holder	Glass-lined polyester resin		
		Contacts	Gold-plated brass		

● Connector type (Polarity type only)

Catalog listing		FL7M-3□6H(D)-CN	FL7M-7□6H(D)-CN	FL7M-10□6(D)-CN
Actuation method		High-frequency oscillation		
Rated sensing distance		3 ±0.3mm	7 ±0.7mm	10 ±1mm
Usable sensing distance		0 to 2.1mm	0 to 4.9mm	0 to 7.0mm
Standard target object		12 x 12 x 1mm iron	18 x 18 x 1mm iron	30 x 30 x 1mm iron
Differential travel		15% max. of sensing distance		
Rated supply voltage		12/24Vdc		
Operating voltage range		10 to 30Vdc		
Leakage current		0.55mA max.		
Control output	Switching current	3 to 100mA		
	Voltage drop	3V max. (with 100mA switching current, 2m cable)		
	Output dielectric strength	30Vdc.		
Operating frequency		1.5kHz		500Hz
Temperature drift		±10% max. of sensing distance for the -25 to +70°C range, taking +25°C as the standard temp. (in the -10 to +60°C range for the FL7M-7□6H□(D)-CN only)		
Supply voltage drift		±1% max. of sensing distance with ±15% voltage fluctuation, taking rated supply voltage as standard voltage		
Indicator lamps		N.O. type: Operation indication: lights up (orange or green) upon output Setting indication: lights up (green) in stable sensing area N.C. type: Operation indication: orange light goes out in sensing area		
Operating temperature		-25 to +70°C		-10 to +60°C
Insulation resistance		50MΩmin. (by 500Vdc megger)		
Dielectric strength		1,000Vac, 50/60Hz for 1 minute		
Vibration resistance		10 to 55Hz, 1.5mm peak-to-peak amplitude, 2 hrs each in X, Y and Z directions		
Shock resistance		980m/s ² 10 times each in X, Y and Z directions	490m/s ² 10 times each in X, Y and Z directions	
Protective structure		IP67 (IEC standard)		
Weight		Approx. 20g(main unit only)	Approx. 50g(main unit only)	Approx. 170g(main unit only)
Circuit protection		Surge absorption, load short-circuit protection, reverse connection protection circuit		
Wiring method		Connector		
Material	Sensor	Case	Ni-plated brass	
		Sensing face	PBT	
	Connector	Housing	Ni-plated brass	
		Holder	Glass-lined polyester resin	
		Contacts	Tin-plated brass	


■ USING THE SETTING INDICATOR

The proximity sensor can be set up to detect objects reliably by bringing the sensor progressively closer to the target object and installing the sensor at the point where the indicator lamp (N.O. indication) changes from red to green.

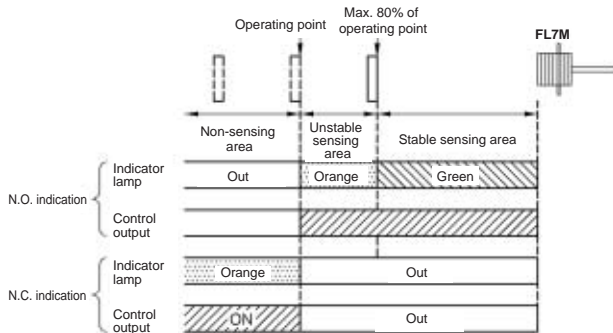


*When the target object is made of a different material (such as aluminum, copper or stainless steel) from the standard target object (iron), the distance at which the indicator lamp changes color is shorter than the 80% maximum.

SENSING AREA (typical)

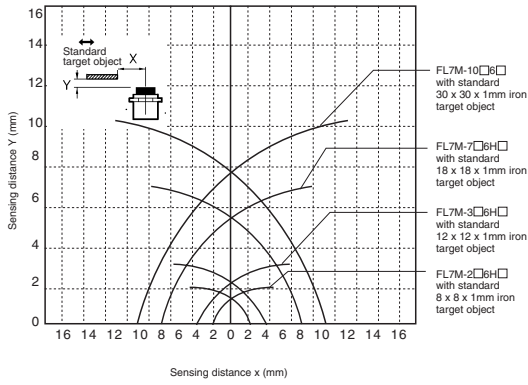


SENSING DISTANCE ACCORDING TO MATERIAL AND SIZE OF OBJECT (typical)


FL7M-2□6H□

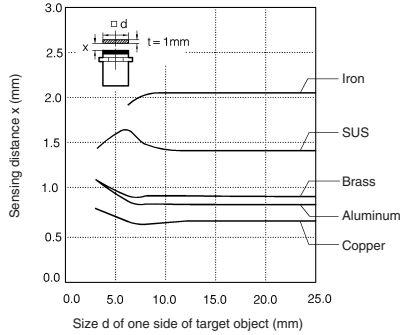


FL7M-3□6H□

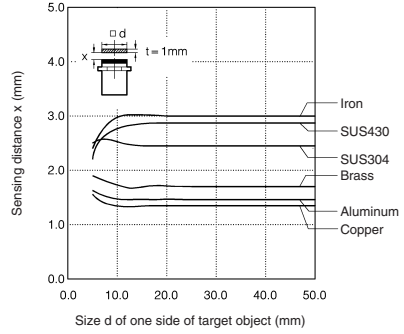

FL7M-7□6H□

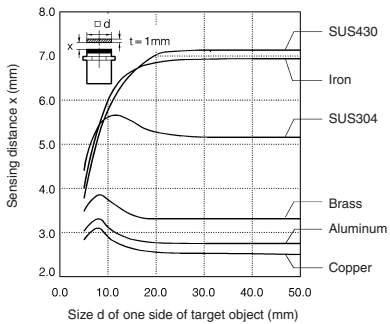


FL7M-10□6□

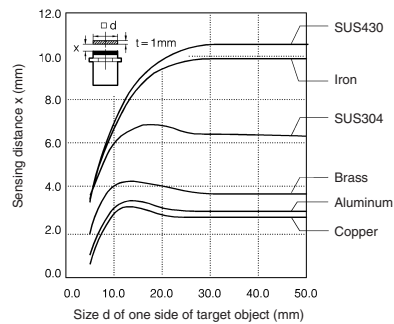


VOLTAGE DROP (typical)


Polarity type

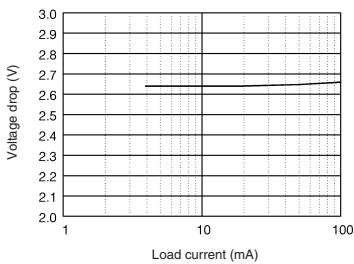

No-polarity type

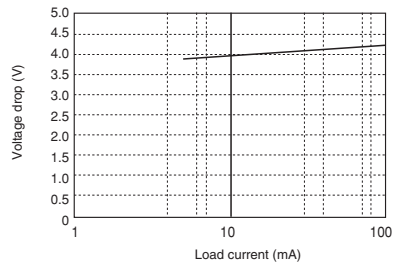

LEAKAGE CURRENT (typical)




EXTERNAL DIMENSIONS

(unit: mm)


Preleaded type

FL7M-2□6H□

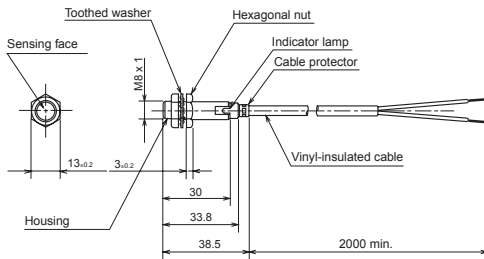


Vinyl-insulated cable (oil-resistant: 0.3mm², 27/0.12, 2-core), dia. 4.1.
Cap color: blue.

FL7M-3□6H□

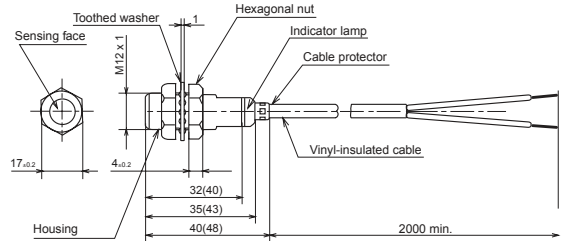


Numbers in parentheses indicate dimensions for the G type.
Vinyl-insulated cable (oil-resistant: 0.3mm², 27/0.12, 2-core), dia. 4.1.
Cap color: blue.

FL7M-7□6H□

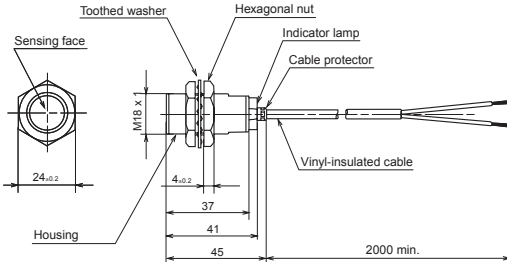

Vinyl-insulated cable (oil-resistant: 0.5mm², 20/0.18, 2-core), dia. 5.7.
Cap color: blue.


FL7M-10□6□

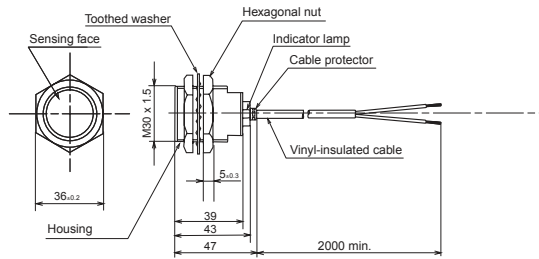

Vinyl-insulated cable (oil-resistant: 0.5mm², 20/0.18, 2-core), dia. 5.7.
Cap color: blue.


Preleaded connector type

FL7M-2□6H□-CN03

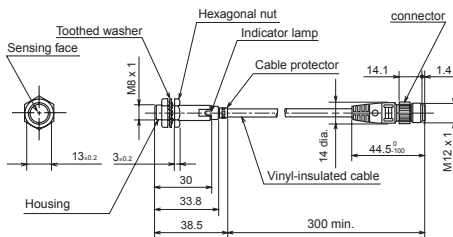


Vinyl-insulated cable (vibration- and oil-resistant:
0.3mm², 27/0.12, 2-core), dia. 4.1.
Cap color: blue.

FL7M-3□6H□-CN03

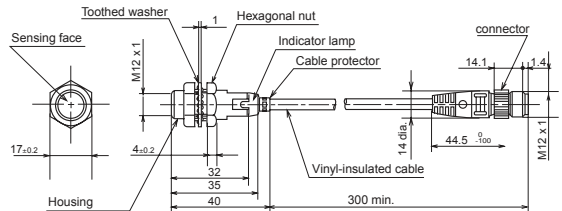


Vinyl-insulated cable (vibration- and oil-resistant:
0.3mm², 27/0.12, 2-core), dia. 4.1.
Cap color: blue.

FL7M-7□6H□-CN03

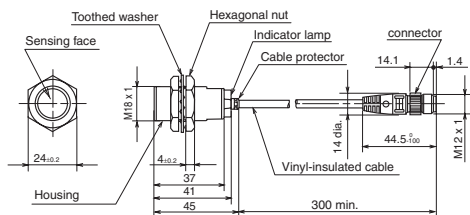

Vinyl-insulated cable (vibration- and oil-resistant):
0.5mm², 20/0.18, 2-core, dia. 5.7.
Cap color: blue.


FL7M-10□6□-CN03

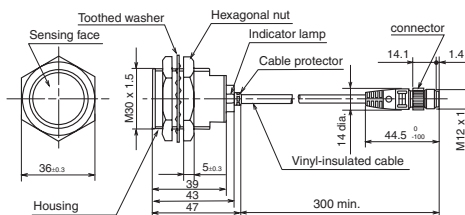

Vinyl-insulated cable (vibration- and oil-resistant):
0.5mm², 20/0.18, 2-core, dia. 5.7.
Cap color: blue.


Connector type (regular type only)

FL7M-3□6H□-CN




Cap color: blue.

FL7M-7□6H□-CN



Cap color: blue.


FL7M-10□6□-CN



Cap color: blue.

MOUNTING BRACKET (sold separately)

Mounting brackets are made of polyacetal resin.
Two screws and two washers are provided for each bracket.

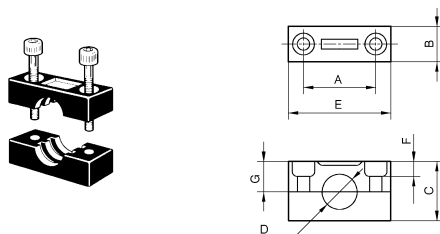

FL-PA118 and FL-PA130 screw holes are oblong.


Catalog listing	Dimensions (mm)							Screw size	
	A	B	C	D	E	F	G	Dia.	Neck
FL-PA112	25	12	20	12dia.	36	6	9.5	M4	25
FL-PA118	30/32	15	30	18dia.	45	7.5	14.5	M5	35
FL-PA130	40/45	15	50	30dia.	60	10	24.5	M5	55

Allowable tightening torque of bracket screws

Catalog listing	Max. torque (N-m)
FL-PA112	0.98
FL-PA118	1.5
FL-PA130	1.5

PROTECTIVE COVER (sold separately)


Protective covers made of polyacetal resin are available for shielded models.
Select a model according to the sensor's external dimensions.



Catalog listing	Dimensions (mm)			
	A	B	C	D
FL-PA12	14dia.	5	0.5	M12 x 1
FL-PA18	21dia.	6	0.5	M18 x 1
FL-PA30	33dia.	8	1.5	M30 x 1.5

SPATTER-GUARDED PROTECTIVE COVER (sold separately)

Spatter-guarded protective covers made of fluorine resin and designed especially for shielded sensors are available.
Select a model according to the sensor's external dimensions.




Catalog listing	Dimensions (mm)			
	A	B	C	D
FL-PA08W	10dia.	5	0.5	M8 x 1
FL-PA12W	15dia.	5	0.7	M12 x 1
FL-PA18W	22dia.	6	0.7	M18 x 1
FL-PA30W	34dia.	8	1.5	M30 x 1.5


WIRING DIAGRAMS

● Polarity type


Preleaded type

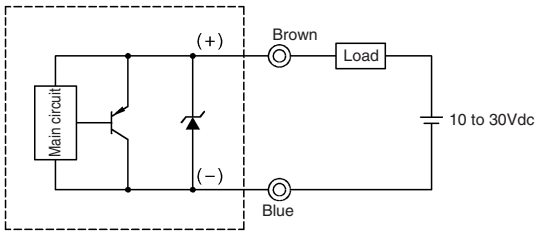


(Preleaded connector / Connector) type (N.C.)

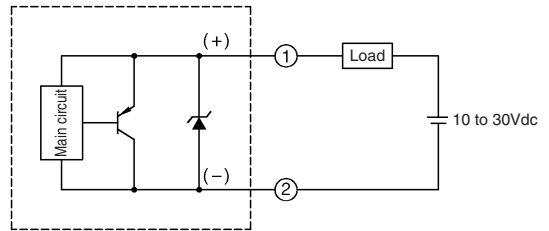

(Preleaded connector / Connector) type (N.O. : CN03, CN)

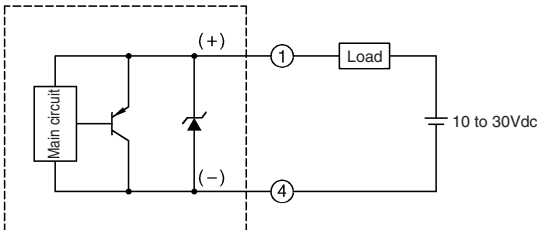


(Preleaded connector / Connector) type (N.O. : CN03A, CNA)

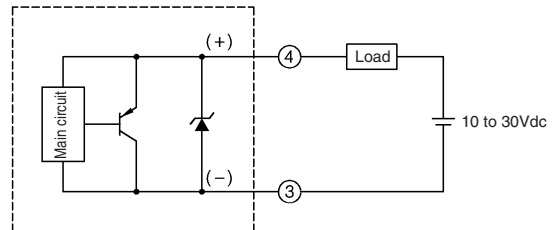


● No-polarity type


Preleaded type

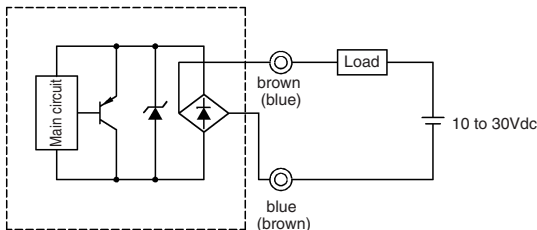

Preleaded connector type

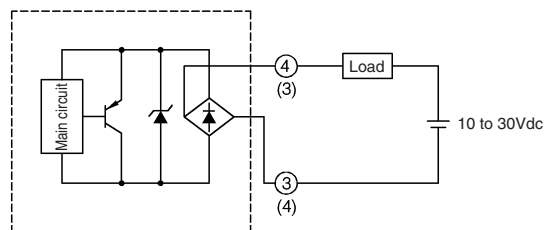

- The load may be connected to either pole.
- A load must be used when power is supplied to the sensor. Although there is short-circuit protection, a combination of a short circuit and wrong wiring can permanently damage the sensor.
- The LED operates normally during a load short circuit, so check the wiring if the output is wrong.
- Fasten connectors tightly by hand.



CONNECTOR SPECIFICATIONS^{*1}

Item	Specifications
Insulation resistance	Max. 100MΩ (by 500Vdc megger)
Dielectric strength	1,500Vac for 1 minute (between contacts, and between contact and connector housing)
Initial contact resistance	Max. 40mΩ (with 3A current to connected male and female connectors. Semiconductor lead-specific resistance not included.)
Mating/unmating force	0.4 to 4.0 N per contact
Mating cycles	50
Connector nut tightening torque	Min. 0.8N·m ²
Cable pullout strength	Min. 100 N
Vibration resistance	10 to 55Hz, 1.5mm peak-to-peak amplitude, for 2 hours each in X, Y and Z directions
Impact resistance	300m/s ² , 3 times each in X, Y and Z directions
Protective structure	IP67
Ambient operating temperature	-10 to +70°C
Ambient storage temperature	-20 to +80°C
Ambient operating humidity	Max. 95% RH
Material	Contacts: Gold-plated brass Contact holder: Glass-lined polyester resin Housing: Polyester elastomer Coupling: Ni-plated brass O-ring: NBR



*1: Specifications assume Yamatake male/female connectors.


*2: The recommended torque is 0.4 to 0.6N·m. If fastened poorly, the IP67 protection is lost, or looseness occurs. Fasten the connector securely by hand.

CABLE WITH CONNECTOR

Be sure to use **PA5** Series cables with connector to connect preleaded type connectors and connector type limit switches.


● PA5 Series cable with connector

Shape	Power supply	Cable properties	Cable length	Catalog listing	Lead colors
	DC	Oil-resistant, flexible; UL2464; flame-resistant; EN-compliant	2m	PA5-4ISX2MK-E	1: brown, 2: white, 3: blue, 4: black
			5m	PA5-4ISX5MK-E	1: brown, 2: white, 3: blue, 4: black
			2m	PA5-4ILX2MK-E	1: brown, 2: white, 3: blue, 4: black
			5m	PA5-4ILX5MK-E	1: brown, 2: white, 3: blue, 4: black

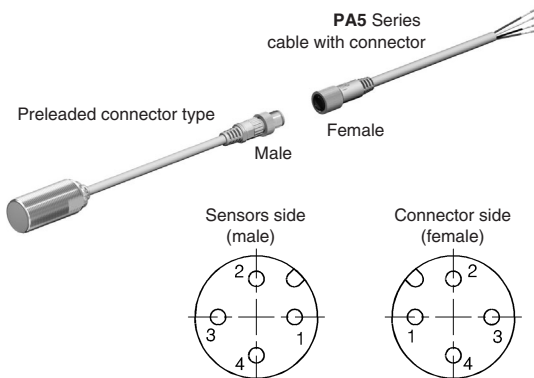

● Tightening the connector


Align the grooves and rotate the fastening nut on the **PA5** connector by hand until it fits tightly with the connector on the sensors side.

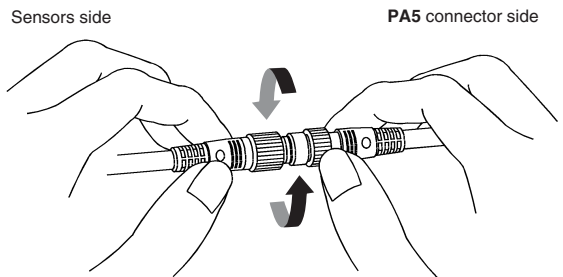

PRECAUTIONS FOR USE

1. Mounting

The allowable tightening torque varies according to the distance from the sensing face.




Catalog listing		Length A (mm)	Max. tightening torque (N·m)	
			A	B
Firefly indicator type	FL7M-2□6□	10	9	12
	FL7M-3□6□	10	20	30
	FL7M-7□6□	0	—	70
	FL7M-10□6□	0	—	150
Window indicator type	FL7M-3□6H□	12	11.8	19.6
	FL7M-7□6H□	15	29.4	49
	FL7M-10□6□	17	49	147

*The table shows the allowable tightening torque when toothed washers (provided) are used.

2. Influence of surrounding metal

Metal other than the target object surrounding the sensor may influence operating characteristics. Leave space between the sensor and surrounding metal as shown below.

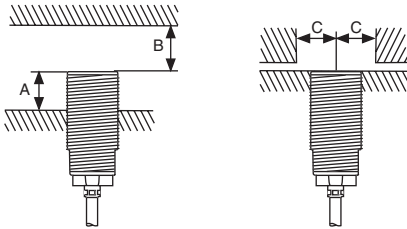

Shaded areas indicate surrounding metal other than the target object.

A: Distance from sensing face of proximity sensor to mounting surface


B: Distance from surface of iron plate to sensing face of proximity sensor.

C: Distance from surface of iron plate to center of proximity switch when A=0

Catalog listing	A(mm)	B(mm)	C(mm)
FL7M-2□6H□	0	8	8
FL7M-3□6H□	0	8	9
FL7M-7□6H□	0	20	13.5
FL7M-10□6□	0	40	22.5

3. Mutual interference prevention

When mounting proximity sensors either parallel to or facing each other, mutual interference may cause the sensor to malfunction. Maintain at least the distances indicated in the figures below.

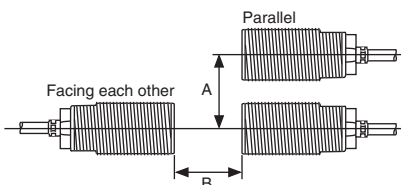

Catalog listing	A(mm)	B(mm)
FL7□-2□6H□	16	20
FL7M-3□6H□	20	30
FL7M-7□6H□	35	50
FL7M-10□6□	70	100

4. Cautions for series or parallel connection

4.1 Series connection (AND switching circuit)


When connecting two or more proximity sensors in series, erroneous output (1 to 3ms) may occur without the rated current being supplied to each of the sensors. For this reason, series connection of proximity sensors is not recommended. However, if proximity sensors must be connected in series, a resistor of 10kΩ must be put in parallel to each of the sensors. Note that the maximum leakage current in a series connection will be 3.5mA. Operation lag also will occur, resulting in increased voltage drop, and the operation indicator lamp will not light.

Operation lag =

$40\text{ms} \times (\text{No. of sensors in series} - 1)$


Voltage drop =

Voltage drop of single sensor \times
No. of sensors in series



4.2 Parallel connection (OR switching circuit)

- If two or more proximity sensors are connected in parallel, total leakage current increases according to the following formula, and may result in the load not turning OFF. (Leakage current = Leakage current of single sensor \times No. of sensors in parallel)
- When two or more sensors in parallel turn ON, one (or more) of



5. Relay loads

The voltage drop of these FL7M sensors is 3.3V. Pay attention to this voltage drop when using a relay load. (With 12Vdc relays, switching is not possible.)

6. Operation upon power ON

After the power is turned ON, it takes at most 40ms until the proximity sensor is ready for sensing. If the load and the proximity sensor use different power supplies, be sure to turn the proximity sensor ON before turning the load ON.

7. Influence of leakage current

A minimal current flows as leakage current for operating the circuits even when the proximity sensor is OFF. Keep this in mind when turning off connected loads.

8. Minimum cable bend radius (R)

The minimum bend radius (R) of the cable is 3 times the cable diameter. Take care not to bend the cable beyond this radius. Also, do not excessively bend the cable within 30mm of the cable lead-in port.