

3. General use FC, FA, FB




■ Features

- General use wire wound, resin molded chip inductor.
- Capable of being Re-flow or flow soldered.
- Wide line-up from 2520 to 4532 case sizes.
- Good for mounting.

■ Recommended Applications

- AV equipment, Wireless communication equipment and various types of general electronic equipment.

■ Explanation of Part Numbers

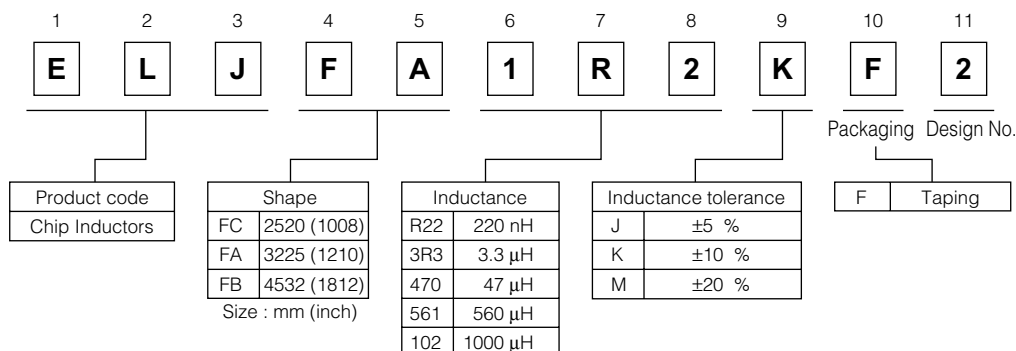

■ Storage Conditions

- Package : Normal temperature (−5 to 35 °C), normal humidity (85 %RH max.), shall not be exposed to direct sunlight and harmful gases and care should be taken so as not to cause dew.
- Operating Temperature : −20 to +85 °C

■ Storage Period

- Solderability may be reduced due to the conditions of high temperature and high humidity which causes the oxidation of tin-plated terminals. Even if storage conditions are within specified limits, solderability may be reduced with the passage of time. Therefore, please control the storage conditions and try to use the product within 6 months of receipt.



■ Packaging Refer 28 ro 29 page.

■ Soldering Conditions Refer 30 page.


■ Safety Precautions Refer 31 page.

FC Type 2520 (1008)

● Dimensions in mm (not to scale)

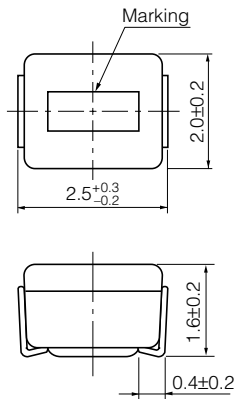

● Recommended Land Pattern in mm (not to scale)

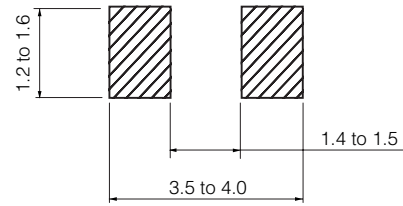

■ Standard Packing Quantity

● 2000 pcs./Reel



Standard Parts

| Part No. | Inductance | | | Q | | SRF *1 (MHz) min. | R _{DC} *2 (Ω) max. | DC Current (mA) max. |
|------------|------------|------------------------------|------------------|-------|------------------|----------------------|--------------------------------|-------------------------|
| | (μH) | Tolerance (%) | Test Freq. (MHz) | min. | Test Freq. (MHz) | | | |
| ELJFCR22□F | 0.22 | M : ±20 % or K : ±10 % | 25.2 | 25 | 25.2 | 230 | 0.70 | 190 |
| ELJFCR27□F | 0.27 | | | | | 210 | 0.75 | 180 |
| ELJFCR33□F | 0.33 | | | | | 190 | 0.85 | 170 |
| ELJFCR39□F | 0.39 | | | | | 175 | 0.95 | 160 |
| ELJFCR47□F | 0.47 | | | | | 160 | 1.00 | 155 |
| ELJFCR56□F | 0.56 | | | | | 155 | 1.10 | 150 |
| ELJFCR68□F | 0.68 | | | | | 135 | 1.25 | 140 |
| ELJFCR82□F | 0.82 | | | | | 125 | 1.40 | 130 |
| ELJFC1R0□F | 1.0 | K : ±10 % or J : ±5 % | 7.96 | 25 | 7.96 | 115 | 0.65 | 195 |
| ELJFC1R2□F | 1.2 | | | | | 100 | 0.75 | 180 |
| ELJFC1R5□F | 1.5 | | | | | 90 | 0.85 | 170 |
| ELJFC1R8□F | 1.8 | | | | | 85 | 0.95 | 160 |
| ELJFC2R2□F | 2.2 | | | | | 80 | 1.05 | 155 |
| ELJFC2R7□F | 2.7 | | | | | 75 | 1.20 | 145 |
| ELJFC3R3□F | 3.3 | | | | | 65 | 1.30 | 135 |
| ELJFC3R9□F | 3.9 | | | | | 60 | 1.40 | 130 |
| ELJFC4R7□F | 4.7 | | | | | 55 | 1.55 | 125 |
| ELJFC5R6□F | 5.6 | | | | | 50 | 1.75 | 120 |
| ELJFC6R8□F | 6.8 | | | | | 45 | 1.95 | 115 |
| ELJFC8R2□F | 8.2 | | | | | 40 | 2.20 | 105 |
| ELJFC100□F | 10 | | | | | 32 | 3.70 | 80 |
| ELJFC120□F | 12 | | | | | 30 | 4.10 | 75 |
| ELJFC150□F | 15 | | | | | 28 | 5.00 | 70 |
| ELJFC180□F | 18 | | | | | 25 | 5.40 | 65 |
| ELJFC220□F | 22 | 22 | 6.00 | 60 | | | | |
| ELJFC270□F | 27 | 21 | 6.30 | 115 | | | | |
| ELJFC330□F | 33 | 20 | 7.10 | 110 | | | | |
| ELJFC390□F | 39 | 18 | 9.50 | 90 | | | | |
| ELJFC470□F | 47 | 17 | 11.0 | 80 | | | | |
| ELJFC560□F | 56 | 16 | 12.1 | 75 | | | | |
| ELJFC680□F | 68 | 15 | 16.6 | 70 | | | | |
| ELJFC820□F | 82 | 13 | 19.0 | 65 | | | | |
| ELJFC101□F | 100 | 0.796 | 15 | 0.796 | 12 | 21.0 | 60 | |


□ : Symbol of Tolerance *1 : Self Resonant Frequency *2 : DC Resistance

FA Type 3225 (1210)

● Dimensions in mm (not to scale)

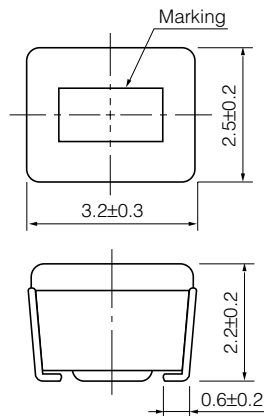

● Recommended Land Pattern in mm (not to scale)

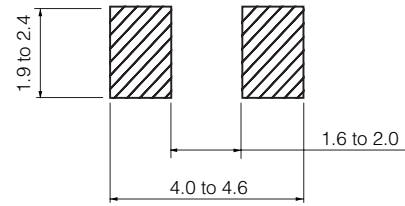

■ Standard Packing Quantity

● 2000 pcs./Reel

Standard Parts


| Part No. | Inductance | | | Q | | SRF *1 (MHz) min. | R _{DC} *2 (Ω) max. | DC Current (mA) max. |
|-------------|------------|------------------------------|------------------|------|------------------|----------------------|--------------------------------|-------------------------|
| | (μH) | Tolerance (%) | Test Freq. (MHz) | min. | Test Freq. (MHz) | | | |
| ELJFAR22□F2 | 0.22 | M : ±20 % or K : ±10 % | 25.2 | 25 | 25.2 | 230 | 0.29 | 360 |
| ELJFAR27□F2 | 0.27 | | | | | 210 | 0.32 | 345 |
| ELJFAR33□F2 | 0.33 | | | | | 190 | 0.35 | 330 |
| ELJFAR39□F2 | 0.39 | | | | | 175 | 0.39 | 305 |
| ELJFAR47□F2 | 0.47 | | | | | 160 | 0.44 | 290 |
| ELJFAR56□F2 | 0.56 | | | | | 150 | 0.49 | 275 |
| ELJFAR68□F2 | 0.68 | | | | | 135 | 0.55 | 260 |
| ELJFAR82□F2 | 0.82 | | | | | 125 | 0.61 | 245 |
| ELJFA1R0□F2 | 1.0 | K : ±10 % or J : ±5 % | 7.96 | 30 | 7.96 | 115 | 0.69 | 230 |
| ELJFA1R2□F2 | 1.2 | | | | | 100 | 0.75 | 215 |
| ELJFA1R5□F | 1.5 | | | | | 90 | 0.75 | 210 |
| ELJFA1R8□F | 1.8 | | | | | 85 | 0.82 | 200 |
| ELJFA2R2□F | 2.2 | | | | | 80 | 0.95 | 190 |
| ELJFA2R7□F | 2.7 | | | | | 75 | 1.1 | 180 |
| ELJFA3R3□F | 3.3 | | | | | 65 | 1.2 | 180 |
| ELJFA3R9□F | 3.9 | | | | | 60 | 1.3 | 175 |
| ELJFA4R7□F | 4.7 | | | | | 55 | 1.5 | 165 |
| ELJFA5R6□F | 5.6 | | | | | 50 | 1.6 | 160 |
| ELJFA6R8□F | 6.8 | | | | | 45 | 1.8 | 150 |
| ELJFA8R2□F | 8.2 | | | | | 40 | 2.0 | 140 |
| ELJFA100□F | 10 | | | | | 36 | 2.1 | 140 |
| ELJFA120□F | 12 | | | | | 33 | 2.5 | 125 |
| ELJFA150□F | 15 | | | | | 30 | 2.8 | 120 |
| ELJFA180□F | 18 | | | | | 27 | 3.3 | 110 |
| ELJFA220□F | 22 | | | | | 25 | 3.7 | 105 |
| ELJFA270□F | 27 | | | | | 22 | 5.0 | 90 |
| ELJFA330□F | 33 | | | | | 20 | 5.6 | 85 |
| ELJFA390□F | 39 | | | | | 20 | 6.4 | 80 |
| ELJFA470□F | 47 | 15 | 7.0 | 75 | | | | |
| ELJFA560□F | 56 | 15 | 8.0 | 70 | | | | |
| ELJFA680□F | 68 | 15 | 9.0 | 65 | | | | |
| ELJFA820□F | 82 | 10 | 10.0 | 60 | | | | |
| ELJFA101□F | 100 | 10 | 10.0 | 60 | | | | |
| ELJFA121□F | 120 | 10 | 11.0 | 55 | | | | |
| ELJFA151□F | 150 | 8 | 15.0 | 50 | | | | |
| ELJFA181□F | 180 | 7 | 17.0 | 50 | | | | |
| ELJFA221□F | 220 | 7 | 21.0 | 45 | | | | |

□ : Symbol of Tolerance *1 : Self Resonant Frequency *2 : DC Resistance


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ FB Type 4532 (1812)

● Dimensions in mm (not to scale)

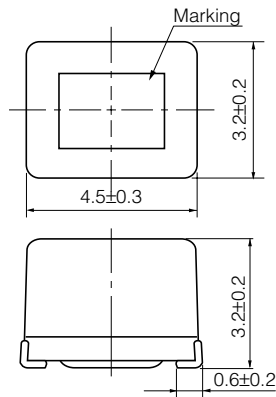

● Recommended Land Pattern in mm (not to scale)

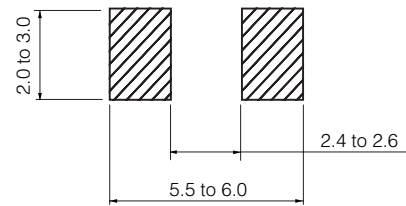

■ Standard Packing Quantity

● 500 pcs./Reel

■ Standard Parts

| Part No. | Inductance | | | Q | | SRF *1 (MHz) min. | R _{DC} *2 (Ω) max. | DC Current (mA) max. |
|------------|------------|-----------------------------|---------------------|------|---------------------|----------------------|--------------------------------|-------------------------|
| | (μH) | Tolerance (%) | Test Freq. (MHz) | min. | Test Freq. (MHz) | | | |
| ELJFBR22□F | 0.22 | M : ±20 % | | 30 | 25.2 | 230 | 0.30 | 700 |
| ELJFBR27□F | 0.27 | | | | | 200 | 0.32 | 650 |
| ELJFBR33□F | 0.33 | | | | | 180 | 0.35 | 630 |
| ELJFBR39□F | 0.39 | | | | | 155 | 0.37 | 620 |
| ELJFBR47□F | 0.47 | | | | | 135 | 0.40 | 580 |
| ELJFBR56□F | 0.56 | | | | | 120 | 0.42 | 560 |
| ELJFBR68□F | 0.68 | | | | | 105 | 0.48 | 530 |
| ELJFBR82□F | 0.82 | | | | | 90 | 0.50 | 500 |
| ELJFB1R0□F | 1.0 | M:±20 % or K : ±10 % | 1.0 | 50 | 7.96 | 80 | 0.52 | 470 |
| ELJFB1R2□F | 1.2 | | | | | 70 | 0.55 | 460 |
| ELJFB1R5□F | 1.5 | | | | | 60 | 0.61 | 430 |
| ELJFB1R8□F | 1.8 | | | | | 50 | 0.61 | 410 |
| ELJFB2R2□F | 2.2 | | | | | 45 | 0.61 | 410 |
| ELJFB2R7□F | 2.7 | | | | | 43 | 0.61 | 400 |
| ELJFB3R3□F | 3.3 | | | | | 39 | 0.66 | 380 |
| ELJFB3R9□F | 3.9 | | | | | 36 | 0.74 | 360 |
| ELJFB4R7□F | 4.7 | | | | | 33 | 0.81 | 350 |
| ELJFB5R6□F | 5.6 | | | | | 30 | 0.88 | 330 |
| ELJFB6R8□F | 6.8 | K : ±10 % or J : ±5 % | 0.1 | 40 | 5 | 26 | 1.0 | 310 |
| ELJFB8R2□F | 8.2 | | | | | 24 | 1.6 | 250 |
| ELJFB100□F | 10 | | | | | 22 | 1.8 | 235 |
| ELJFB120□F | 12 | | | | | 20 | 1.9 | 225 |
| ELJFB150□F | 15 | | | | | 18 | 2.1 | 215 |
| ELJFB180□F | 18 | | | | | 16 | 2.3 | 205 |
| ELJFB220□F | 22 | | | | | 15 | 2.6 | 195 |
| ELJFB270□F | 27 | | | | | 13 | 2.9 | 185 |
| ELJFB330□F | 33 | | | | | 12 | 3.1 | 175 |
| ELJFB390□F | 39 | | | | | 10 | 3.6 | 165 |
| ELJFB470□F | 47 | K : ±10 % or J : ±5 % | 0.1 | 30 | 2.52 | 9.7 | 4.2 | 130 |
| ELJFB560□F | 56 | | | | | 9.0 | 4.7 | 125 |
| ELJFB680□F | 68 | | | | | 8.2 | 5.3 | 115 |
| ELJFB820□F | 82 | | | | | 7.5 | 5.9 | 110 |
| ELJFB101□F | 100 | | | | | 6.7 | 8.8 | 105 |
| ELJFB121□F | 120 | | | | | 6.1 | 10 | 100 |
| ELJFB151□F | 150 | | | | | 5.5 | 11 | 95 |
| ELJFB181□F | 180 | | | | | 5.1 | 13 | 85 |
| ELJFB221□F | 220 | | | | | 4.5 | 13 | 85 |
| ELJFB271□F | 270 | | | | | 4.1 | 14 | 80 |
| ELJFB331□F | 330 | 0.796 | | | 3.7 | 16 | 75 | |
| ELJFB391□F | 390 | | | | 3.3 | 19 | 70 | |
| ELJFB471□F | 470 | | | | 3.3 | 31 | 55 | |
| ELJFB561□F | 560 | | | | 2.7 | 35 | 50 | |
| ELJFB681□F | 680 | | | | 2.5 | 39 | 50 | |
| ELJFB821□F | 820 | | | | 2.4 | 45 | 45 | |
| ELJFB102□F | 1000 | 2.1 | 53 | 40 | | | | |

□ : Symbol of Tolerance *1 : Self Resonant Frequency *2 : DC Resistance