


HIGH FREQUENCY LOW NOISE
AMPLIFIER

FEATURES

- *Low Noise and High Gain
- *High Power Gain

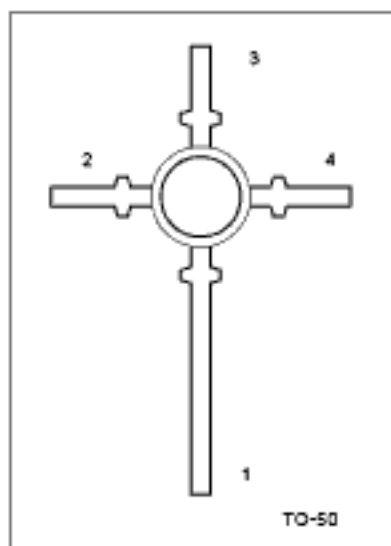

1:COLLECTOR 2:EMITTER 3:BASE 4:EMITTER

ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNIT
Collector-base voltage	V_{CB0}	20	V
Collector-emitter voltage	V_{CE0}	12	V
Emitter-base voltage	V_{EB0}	3	V
Collector current	I_C	100	mA
Total power dissipation	P_T	250	mW
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-65 ~ +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Cutoff Current	I_{C0}	$V_{CE}=10\text{V}, I_B=0$			1.0	μA
Emitter Cutoff Current	I_{E0}	$V_{BE}=1\text{V}, I_C=0$			1.0	μA
DC Current Gain	h_{FE}	$V_{CE}=10\text{V}, I_C=20\text{mA}$	50		300	
Gain bandwidth Product	f_T	$V_{CE}=10\text{V}, I_C=20\text{mA}$		7		GHz
Feed-Back Capacitance	C_{re}	$V_{CE}=10\text{V}, I_C=0, f=1.0\text{MHz}$			1.0	pF
Noise figure	NF	$V_{CE}=10\text{V}, I_C=7\text{mA}, f=1.0\text{GHz}$			2.0	dB

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.