

AC Current transducer APR-B10

Split core transducer for the electronic measurement distorted AC waveforms current, with galvanic isolation between the primary (High power) and the secondary circuits (Electronic circuit). Switch selectable ranges and True RMS 0-5V and 0-10V switch selectable voltage output.



Electrical data



Primary Nom I _{PN} (A.t.		Туре	
10,25,50 50,75,10 100,150, 200,300,	00 0-5V or 0-10V 200 0-5V or 0-10V	APR 50 B10 APR 100 B1 APR 200 B1 APR 400 B1	0 0
L	oad resistance	≥ 10	kΩ
0	Supply voltage	+24 ±5%	V DC
	Current Consumption	< 30	mΑ
	imitation of voltage output (0-10V)	14	V
	imitation of voltage output (0-5V)	7	. \
C	Overloaded input current	no limita	tion
Accura	acy-Dynamic performance data		
	Accuracy @ I_{PN} , $T_A = 25^{\circ}C$ (without offset)	< ±1 %	6 of I _{PN}
	inearity (0 ± I _{PN})	< ±0.5 %	6 of I _{PN}
V oe E	Electrical offset voltage, $\mathbf{T}_{A} = 25^{\circ}\text{C}$	< ±0.5 %	6 of I _{PN}
V _{ot} T	hermal drift of V _{oe}	±1	mV/K
тс ${ m e}_{\scriptscriptstyle m G}$ т	hermal drift of the gain (% of reading)	±0.1	%/K
	Response time @ 90% of $I_{_{\rm P}}$	< 400	m s
f F	requency bandwidth (±1%)	30 6000	0 Hz
Gener	al data		
T _A A	Ambient operating temperature	-20 +60	
	Ambient storage temperature	-20 +85	°C
m ۱	Mass	90	g
F	Protection type	IP20	
dCp C	Creepage distance	5.5	m m
dCI C	Clearance distance	5.5	m m
CTI C	Comparative tracking index (Group I)	600	V
L	JL94 classification	V0	
Insulat	tion category		
V _b F	Rated Voltage	300	V
v	vith IEC 61010-1 standards and following conditions	3:	
	- Single insulation		
	- Over voltage category CAT III		
	- Pollution degree PD2		
	- None uniform field		
V _d F	R.m.s. voltage for AC insulation test, 50Hz, 1mn	5	kV
	R.m.s. voltage for partial discharge extinction @ 10p	C 1.5	kV
	Peak impulse withstand voltage 1.2/50µs	6.1	kV
	finsulated cable is used for the primary circuit, the v	oltage categ	ory
	ould be improved with the following table:	0 0	,
	Cable insulation (primary) Category		
	HAR 05 600V CAT III		
	HAR 07 1000V CAT III		
Notos : !: :	allation and maintenance should be done with power suppl		J

 $I_{PN} = 10 ... 400 A$



Features

- VFD and SCR waveforms current measurement
- True RMS output
- Split core type
- 5V & 10V switch selectable voltage output
- DIN mounting & Panel mounting
- Eliminates insertion loss
- · Switch selectable ranges

Advantages

- Large aperture for cable up to Ø18mm
- High isolation between primary and secondary circuits
- Easy to mount

Applications

- VFD Controlled Loads:
 - VFD output indicates how the motor and attached load are operating.
- SCR Controlled Loads:
 - Acurate measurement of phase angle fired or burst fired (time proportioned) SCRs. Current measurement gives faster response than temperature measurement.
- Switching Power Supplies and Electronic Ballasts:
 - True RMS sensing is the most accurate way to measure power supply or ballast input power.

041029/3


<u>Notes</u>: Installation and maintenance should be done with power supply disconnected.

The operator must have accrediation to install this material.

The users must take care of all protection gurantee against electrical shock.



Dimensions AP(R)-B10 (unit: mm, 1mm = 0.0394 inch)

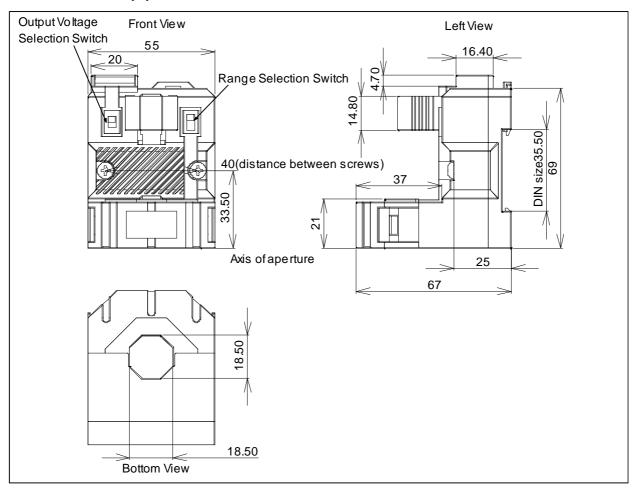

Mechanical characteristics

General tolerance ±1 mm
 Primary aperture Ø 18.5 mm
 Panel mounting 2 holes Ø 4.0 mm

• Distance between holes 40.0 mm

For panel mounting, replace M4 screws by new one (not supplied) with appropriate length to panel's thickness.

Connections

 \bullet Wires up to 2 mm \varnothing

0-5, 10V Selectable

