


| 8 button membrane SW to OSD Control Board CN2 Pin Assignment | |
|--|---------------------------|
| pin # | description |
| 10 | Common Ground |
| 9 | Select Up |
| 8 | Select Down |
| 7 | Adjust Up/Increase/Right |
| 6 | Adjust Down/Decrease/Left |
| 5 | Menu |
| 4 | Brightness Down |
| 3 | Brightness Up |
| 2 | ON/OFF |
| 1 | Common Ground |


Membrane interface board P/N 416100120-3 can operate under 12VDC/24VDC power input environment.

| PCB OSD Control Board CN1 Pin Assignment | |
|--|---------------------------------|
| pin # | description |
| 12 | no connection |
| 11 | OSD Select UP |
| 10 | OSD Select Down |
| 9 | OSD Plus/Right |
| 8 | OSD Minus/Left |
| 7 | OSD Menu |
| 6 | Ground |
| 5 | Backlight Brightness VR pin B |
| 4 | Backlight Brightness VR pin WIP |
| 3 | Backlight Brightness VR pin A |
| 2 | Power Switch B |
| 1 | Power Switch A |

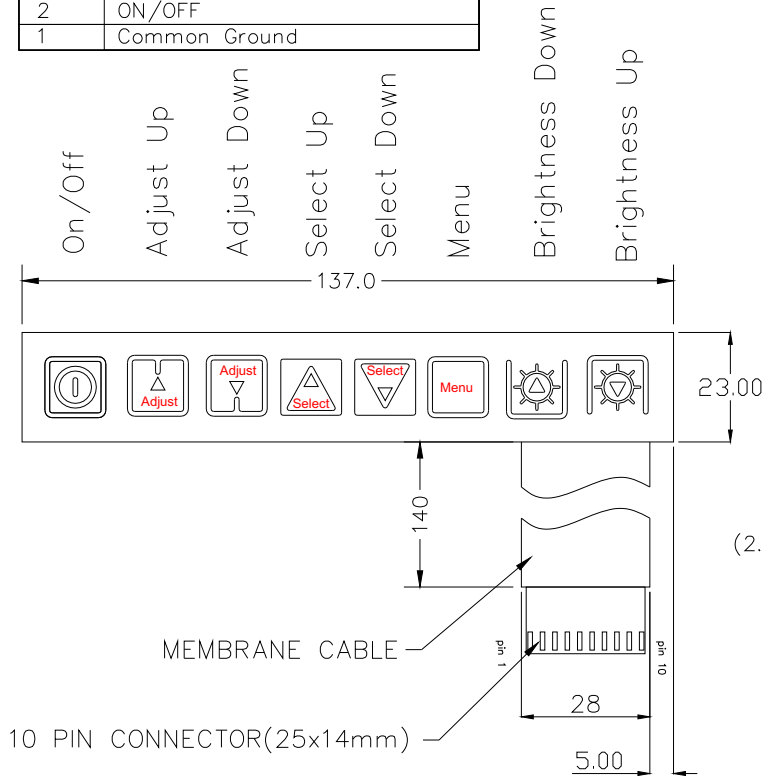


FRONT VIEW

Membrane Switch:
P/N:356301022-3

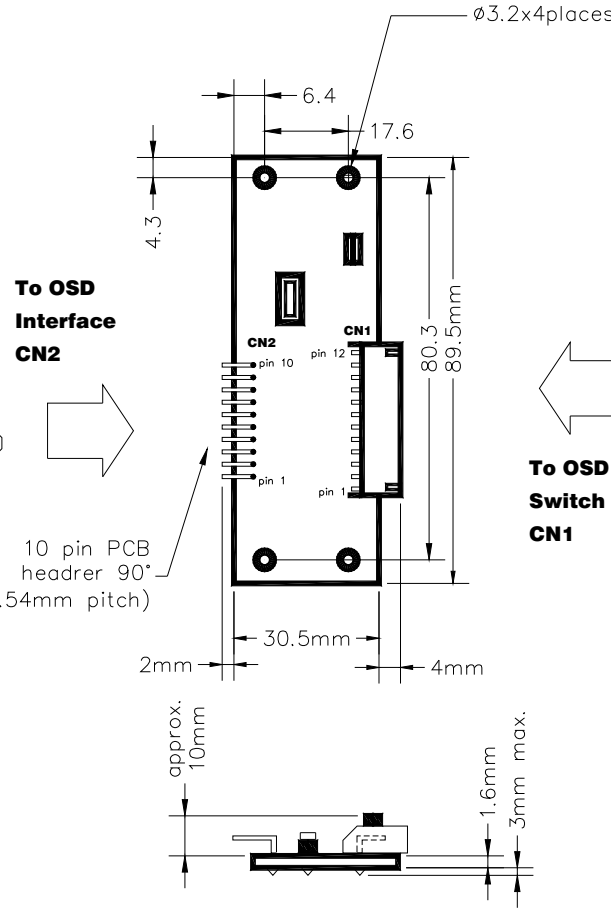

Membrane Interface Board:
P/N:416100120-3

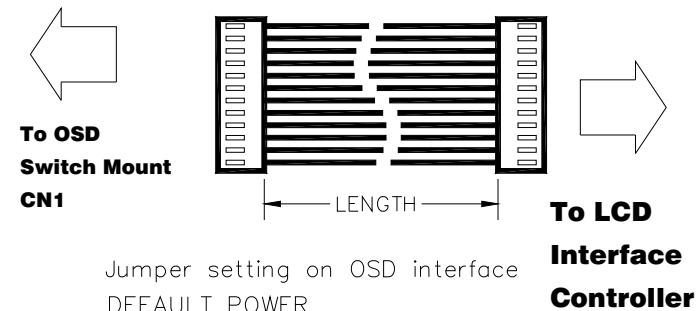

Jumper setting on OSD interface
 DEFAULT POWER
 JP1 : 1-2 closed - OFF
 2-3 closed - ON
 BRIGHTNESS INC/DEC SWITCH
 JP2 : 1-3 & 2-4 closed - SWAP
 1-2 & 3-4 closed - NORMAL

OSD cable:
P/N:426120400-3 (12/12 WAY), 300mm



Title:
KIT 60135-3 OSD KIT

NOTE:
All dimensions are in mm

Date:
30 JAN 08

Kit 60135-3 OSD KIT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Digital View:](#)

[KIT 60135-3](#) [356301022-3](#) [426120400-3](#)