


E_XD-1W & F_XD-1W Series

1W, FIXED INPUT, 3000V ISOLATED & UNREGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER

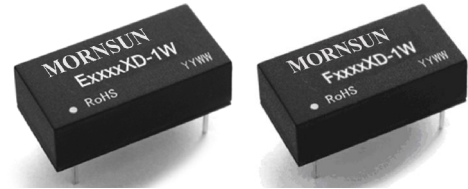

RoHS

FEATURES

- DIP package
- 3KVDC isolation
- Temperature range: -40°C ~ +85°C
- No heat sink required
- No external component required
- Internal SMD construction
- Industry standard pinout
- RoHS Compliance
- Compatible with "DCP01" series

APPLICATIONS

The E_XD-1W & F_XD-1W series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 3000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

MODEL SELECTION

F0505XD-1W

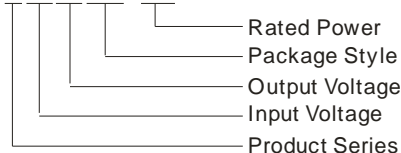

MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou, P.R.China.

Tel: 86-20-38601850

Fax: 86-20-38601272

[Http://www.mornsun-power.com](http://www.mornsun-power.com)

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ.)
	Voltage (VDC)		Voltage (VDC)	Current (mA)		
	Nominal	Range		Max.	Min.	
F0505XD-1W	5	4.5-5.5	5	200	20	77
E0512XD-1W			±12	±42	±4	76
F2405XD-1W	24	21.6-26.4	5	200	20	75

Note:

1. Models listed with strike-through text have been officially discontinued.

COMMON SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Units
Storage humidity range				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15	25	
Lead temperature	1.5mm from case for 10 seconds			300	
Short circuit protection*		Continuous			
Cooling		Free air convection			
Case material		Plastic(UL94-V0)			
MTBF		3500			k hours
Weight			2.4		g


ISOLATION SPECIFICATIONS

Item	Test conditions	Min.	Typ.	Max.	Units
Isolation voltage	Tested for 1 minute and 1mA max	3000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation capacitance			7		pF


OUTPUT SPECIFICATIONS						
Item	Test conditions	Min.	Typ.	Max.	Units	
Output power		0.1		1	W	
Line regulation	For Vin change of 1%			±1.2	%	
Load regulation	10% to 100% load (5V output)		12.8	15		
	10% to 100% load (12V output)		6.8	15		
Output voltage accuracy	See tolerance envelope graph					
Temperature drift	100% full load			0.03	%/°C	
Ripple & Noise*	20MHz Bandwidth	E_XD-1W		100	150	mVp-p
		F_XD-1W		100	150	
Switching frequency	Full load, nominal input		83		kHz	

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

TYPICAL CHARACTERISTICS

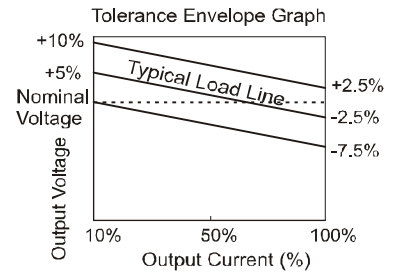

This is output voltage accuracy curve above, output voltage under different load will be different, this graph is for reference only.

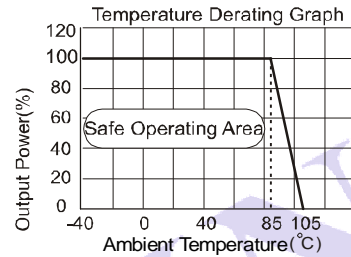

APPLICATION NOTE

1) Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load **could not be less than 10% of the full load**. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.

2) Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

3) Output Voltage Regulation and Over-voltage Protection Circuit



The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

4) Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

5) No parallel connection or plug and play

RECOMMENDED CIRCUIT

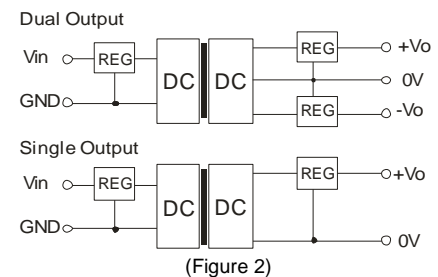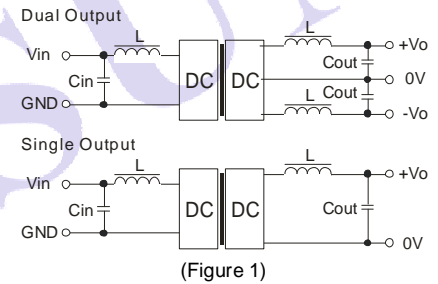


EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
5	4.7	5	10	±5	4.7
24	1	12	2.2	±12	1

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

OUTLINE DIMENSIONS & PIN CONNECTIONS

MECHANICAL DIMENSIONS

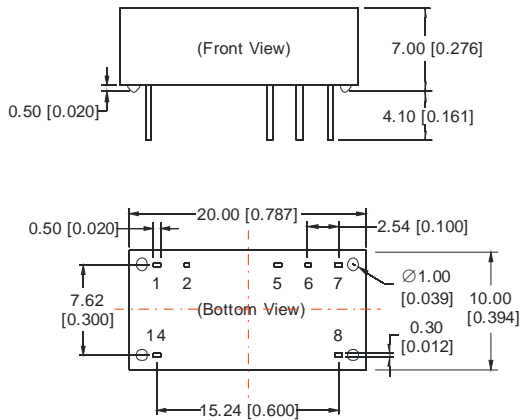


FOOTPRINT DETAILS		
Pin	Single	Dual
1	Vin	Vin
2	GND	GND
5	0V	0V
6	+Vo	+Vo
7	NC	-Vo
Others	NC	NC

NC: No connection.

Note:
 Unit: mm[inch]
 Pin section tolerances: $\pm 0.1\text{mm}[\pm 0.039\text{inch}]$
 General tolerances: $\pm 0.25\text{mm}[\pm 0.01\text{inch}]$


RECOMMENDED FOOTPRINT

DUAL/SINGLE OUTPUT

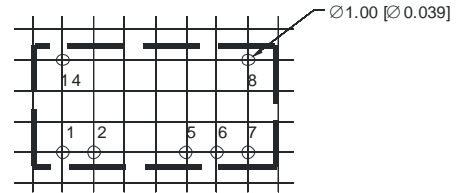

Note: grid 2.54*2.54mm.

TUBE OUTLINE DIMENSIONS

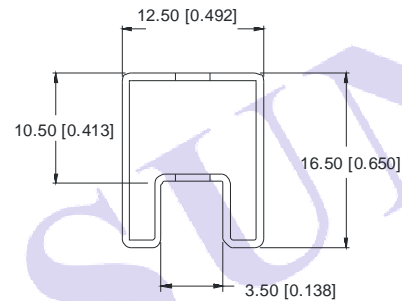

Note:
 Unit :mm[inch]
 General tolerances: $\pm 0.50\text{mm}[\pm 0.020\text{inch}]$
 L=530mm[20.866inch] Tube Quantity: 25pcs
 L=220mm[8.661inch] Tube Quantity: 10pcs
 Short tube inner package dimensions: L*W*H= 255*170*80mm
 Short tube outer package dimensions(with six inner package boxes):
 L*W*H= 375*280*270mm
 Long tube inner package dimensions: L*W*H= 580*200*100mm
 Long tube outer package dimensions(with two inner package boxes):
 L*W*H= 600*215*220mm
 Long tube outer package dimensions(with three inner package boxes):
 L*W*H= 600*215*325mm

Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product.
2. All specifications measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
3. In this datasheet, all the test methods of indications are based on corporate standards.
4. Only typical models listed, other models may be different, please contact our technical person for more details.