

Bias Resistor Transistor

NPN Silicon Surface Mount Transistor with Monolithic Bias Resistor Network

LDTC144VET1G

- Applications

Inverter, Interface, Driver



- Features

- 1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
- 2) The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- 3) Only the on/off conditions need to be set for operation, making the device design easy.

- We declare that the material of product compliance with RoHS requirements.

- Absolute maximum ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Limits		Unit
Supply voltage	V _{CC}	50		V
Input voltage	V _{IN}	-10 to +40		V
Output current	I _O	30		mA
	I _{C(Max.)}	100		
Power dissipation	P _D	200		mW
Junction temperature	T _J	150		°C
Storage temperature	T _{STG}	-55 to +150		°C

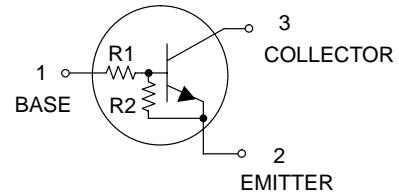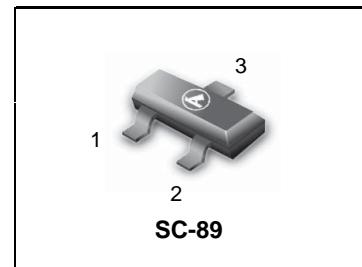

DEVICE MARKING AND RESISTOR VALUES

Device	Marking	R1 (K)	R2 (K)	Shipping
LDTC144VET1G	M7	47	10	3000/Tape & Reel
LDTC144VET3G	M7	47	10	10000/Tape & Reel

- Electrical characteristics ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	V _{I(off)}	—	—	1	V	V _{CC} =5V , I _O =100μA
	V _{I(on)}	6	—	—		V _O =0.3V , I _O =2mA
Output voltage	V _{O(on)}	—	0.1	0.3	V	I _O =10mA , I _I =0.5mA
Input current	I _I	—	—	0.16	mA	V _I =5V
Output current	I _{O(off)}	—	—	0.5	μA	V _{CC} =50V , V _I =0V
DC current gain	G _I	33	—	—	—	I _O =5mA , V _O =5V
Input resistance	R _I	32.9	47	61.1	kΩ	—
Resistance ratio	R _O /R _I	0.17	0.21	0.26	—	—
Transition frequency	f _T *	—	250	—	MHz	V _{CE} =10V , I _E =-5mA , f=100MHz

* Characteristics of built-in transistor

LDTC144VET1G

●Electrical characteristic curves

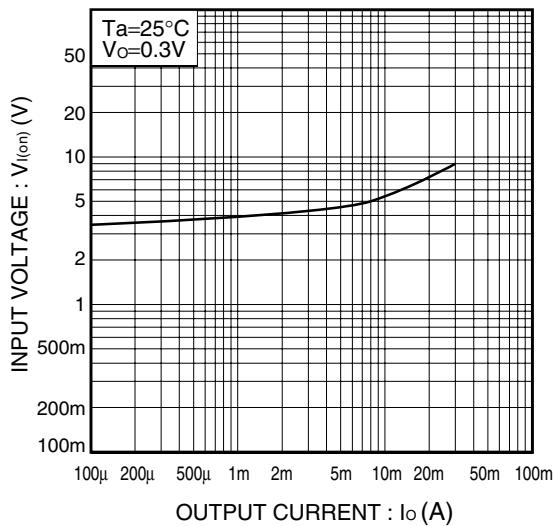


Fig.1 Input voltage vs. Output current
(ON characteristics)

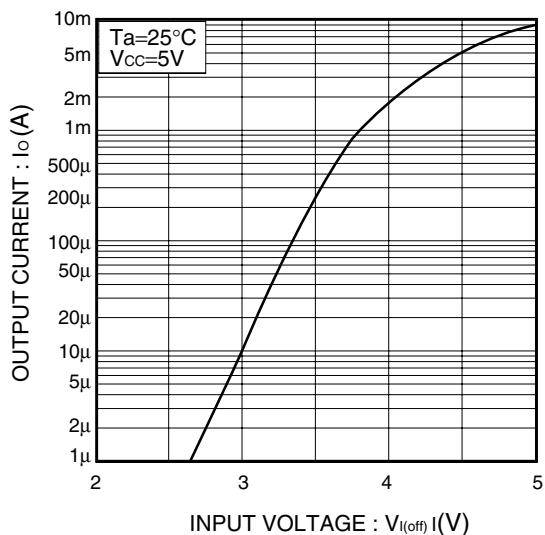


Fig.2 Output current vs. Input voltage
(OFF characteristics)

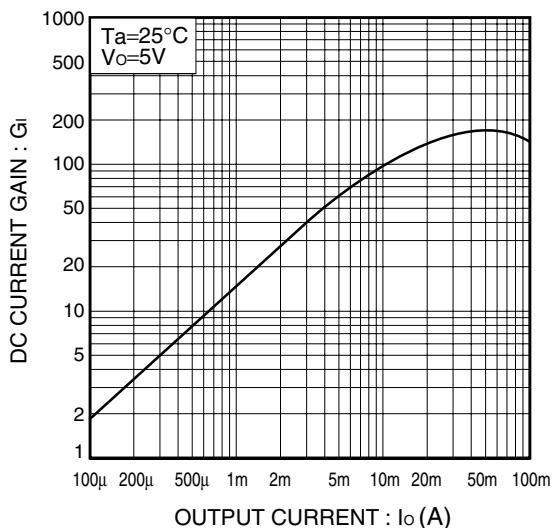


Fig.3 DC current gain vs. Output current



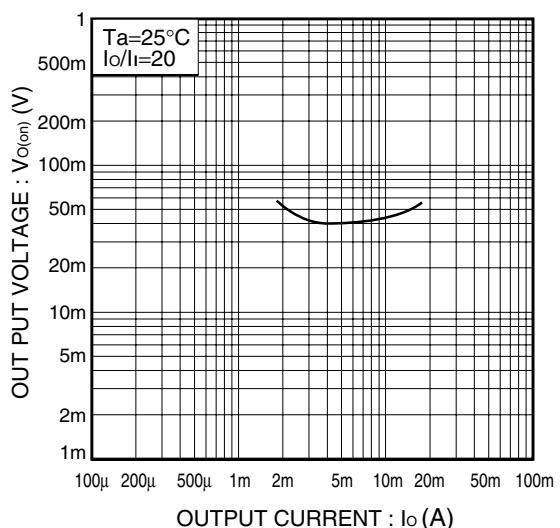


Fig.4 Output voltage vs. Output current

LDTC144VET1G
SC-89

NOTES:

- 1.DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- 2.CONTROLLING DIMENSION: MILLIMETERS
- 3.MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- 4.463C-01 OBSOLETE, NEW STANDARD 463C-02.

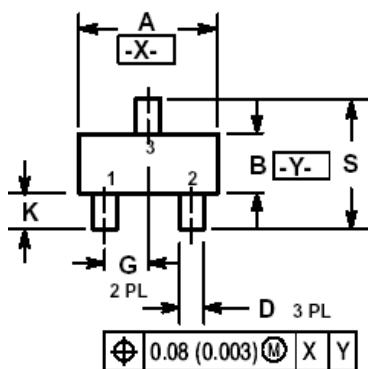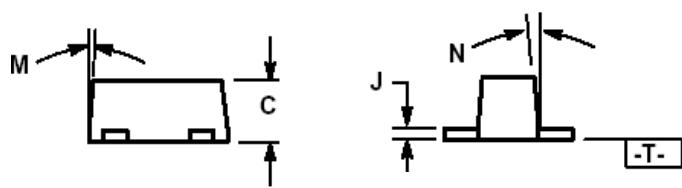

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.50	1.60	1.70	0.059	0.063	0.067
B	0.75	0.85	0.95	0.030	0.034	0.040
C	0.60	0.70	0.80	0.024	0.028	0.031
D	0.23	0.28	0.33	0.009	0.011	0.013
G	0.50 BSC			0.020 BSC		
H	0.53 REF			0.021 REF		
J	0.10	0.15	0.20	0.004	0.006	0.008
K	0.30	0.40	0.50	0.012	0.016	0.020
L	1.10 REF			0.043 REF		
M	---	---	10°	---	---	10°
N	---	---	10°	---	---	10°
S	1.50	1.60	1.70	0.059	0.063	0.067

