# **ULTRA LOW CAPACITANCE STEERING DIODE/TVS ARRAY**

### **DESCRIPTION**

The SRV25-4 is a dual USB port protection array that features ultra low capacitance. This device can be used in applications such as video cards, SMART phones, Gigabit Ethernet and other computer interfaces. Designed for ESD protection, the SRV25-4 can clamp the effects of electrical fast transients on the power bus.

The SRV25-4 combines 8 low capacitance steering diodes for up to four individual data or transmission lines and one TVS diode for power bus protection. This device is available in the space-saving DFN-10 package configuration, which minimizes lead inductance to prevent overshoot voltages during high ESD current events. The SRV25-4 meets the IEC 61000-4-2, 61000-4-2 and 61000-4-5 requirements.

### **FEATURES**

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A, 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 24A, 8/20μs Level 2(Line-Gnd) & Level 3(Line-Line0
- 800 Watts Peak Pulse Power per Line(tp = 8/20μs)
- ESD Protection > 25 kilovolts
- · Low Clamping Voltage
- Protection for 4 Lines
- Ultra Low Capacitance: 3.5pF Typical
- RoHS Compliant
- REACH Compliant


# **MECHANICAL CHARACTERISTICS**


- Molded JEDEC DFN-10 Package
- Approximate Weight: 7 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
  - Pure-Tin Sn, 100: 260-270°C
- Flammability Rating UL 94V-0
- 8mm Tape and Reel per EIA Standard 481

### **APPLICATIONS**

- · Gigabit Ethernet
- SMART Phones
- · Portable Electronics
- · Video Card Interfaces
- · USB 2.0 Interfaces
- DVI Interfaces

# **CIRCUIT DIAGRAM AND PIN CONFIGURATION**

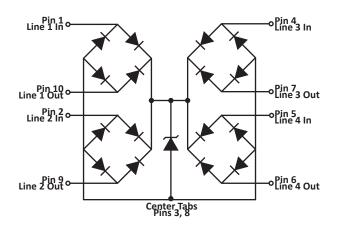



# TYPICAL DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified							
PARAMETER	SYMBOL	VALUE	UNITS				
Peak Pulse Power (tp = $8/20\mu s$ ) - See Figure 1	P <sub>pp</sub>	800	Watts				
Operating Temperature	T <sub>L</sub>	-55 to 150	°C				
Storage Temperature	T <sub>stg</sub>	-55 to 150	°C				
Forward Surge Rating (5ms @ 25°C, I <sub>F</sub> = 10mA)	V <sub>F</sub>	0.5 Min 1.2 Max.	Volts				
Peak Pulse Current (tp = 8/20µs) - Note 1	I <sub>pp</sub>	40	Amps				

### **NOTES**

1. Measured with I/O pins tied together.

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified										
PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE (Note 1)	MINIMUM BREAKDOWN VOLTAGE (Note 1)	MAXIMUM CLAMPING VOLTAGE (Fig. 2) (Note 1)	MAXIMUM CLAMPING VOLTAGE (Fig. 2) (Note 1)	MAXIMUM LEAKAGE CURRENT (Note 1)	TYPICAL CAPACITANCE (Note 1)			
		V <sub>wM</sub> VOLTS	@ 1mA V <sub>(BR)</sub> VOLTS	@ I <sub>p</sub> = 1A V <sub>c</sub> VOLTS	@ I <sub>p</sub> = 10A V <sub>c</sub> VOLTS	@V <sub>wм</sub> Ι <sub>D</sub> μΑ	@0V, 1MHz C <sub>J(SD)</sub> pF			
SRV25-4	S4	2.5	3.0	4.5	7.4	0.5	3.5			


### **NOTES**


1. Measured from I/O pin to ground.


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified								
MAXIMUM CLAMPING	MAXIMUM CLAMPING	MAXIMUM CAPACITANCE	TYPICAL CAPACITANCE					
VOLTAGE (Fig. 2) (Note 1)	VOLTAGE (Fig. 2) (Note 2)		1/0 то 1/0					
@ I <sub>p</sub> = 25A V <sub>c</sub> VOLTS	@ I <sub>p</sub> = 40A V <sub>c</sub> VOLTS	@0V, 1MHz C <sub>J(SD)</sub> pF	@0V, 1MHz C <sub>J(SD)</sub> pF					
12.0	20.0	5.0	1.7					

- Measured from I/O pin to ground.
   Measured with I/O pins tied together.

# **TYPICAL DEVICE CHARACTERISTICS**

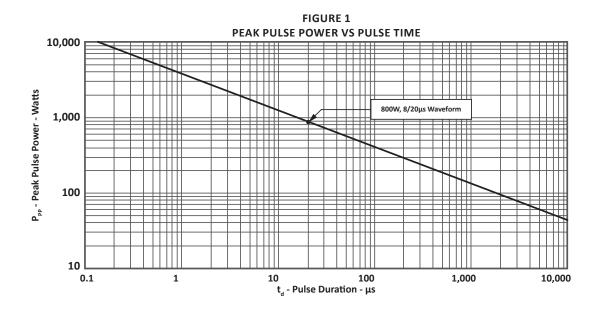


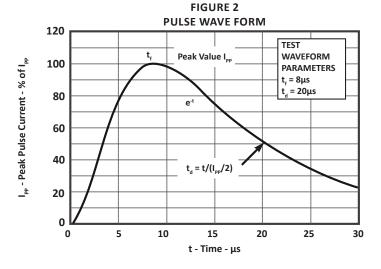

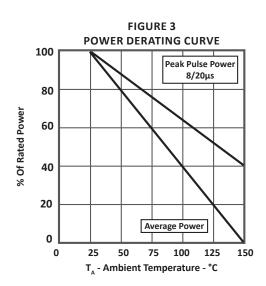


### TYPICAL DEVICE CHARACTERISTICS

### **INSERTION LOSS - IO TO IO**

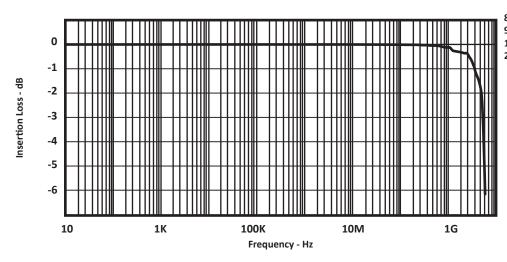

800MHz = -0.1845dB 900MHz = -0.239db 1.8GHz = -1.8755dB 2.5GHz = -3.8204dB


### **INSERTION LOSS - IO TO GND**

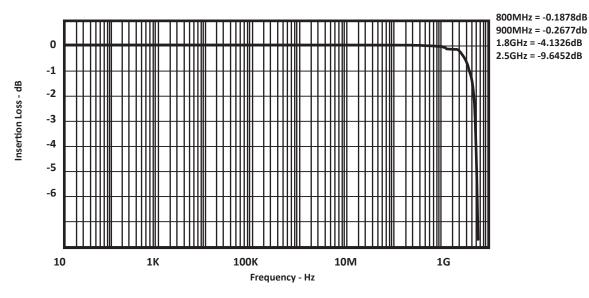



05372.R2 9/15 Page 4 <u>www.protekdevices.com</u>

# **DFN-10 PACKAGE INFORMATION**

OUTLINE DIMENSIONS								
DIM	MILLIN	IETERS	INCHES					
ואווט	MIN	MAX	MIN	MAX				
А	0.50	0.65	0.020	0.026				
A1	0.00	0.05	0.00	0.002				
A2	0.	15	0.0	106				
b	0.15	0.25	0.006	0.010				
b1	0.25	0.45	0.010	0.018				
D	2.90	3.10	0.114	0.122				
Е	1.90	2.10	0.075	0.083				
е	0.60	BSC	0.024 BSC					
e1	0.65	BSC	0.026 BSC					
e2	0.95	BSC	0.037	7 BSC				
L	0.25	0.35	0.010 0.014					
L1	0.95	1.05	0.037 0.041					









## NOTES

- 1. Controlling dimension: millimeters.
- 2. Dimensioning and tolerances per ANSI Y14.M, 1985.

PAD LAYOUT DIMENSIONS							
DIM	MILLIMETERS	INCHES					
ווועו	NOMINAL	NOMINAL					
С	1.98	0.078					
G	1.40	0.056					
Р	0.60	0.024					
P1	0.65	0.026					
P2	0.95	0.037					
Х	0.25	0.010					
X1	0.40	0.016					
Υ	0.58	0.023					
Y1	1.00	0.039					
Z	2.56	0.101					
NOTES 1. Controlling dimension: millimeters.							



# **TAPE AND REEL**

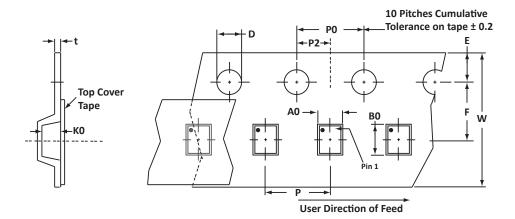

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	ко	D	E	F	w	P0	P2	Р	tmax
178mm (7")	8mm	2.24 ± 0.05	3.23 ± 0.05	0.93 ± 0.05	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

### NOTES

- 1. Dimensions are in millimeters.
- 2. Surface mount product is taped and reeled in accordance with EIA-481.
- 3. Suffix T7 = 7" Reel 3,000 pieces per 8mm tape.
- 4. Marking on Part marking code (see page 2).

ORDERING INFORMATION								
BASE PART NUMBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUBE QTY								
SRV25-4	N/A	-T7	3,000	7"	n/a			
This device is only available in a Lead-Free configuration.								

05372.R2 9/15 Page 6 <u>www.protekdevices.com</u>



### **COMPANY INFORMATION**

#### **COMPANY PROFILE**

In business more than 20 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers high performance interface and linear products. They include analog switches; multiplexers; LED drivers; LED wafer die for ESD protection; audio control ICs; RF and related high frequency products.

### **CONTACT US**

### **Corporate Headquarters**

2929 South Fair Lane Tempe, Arizona 85282 USA

### By Telephone

General: 602-431-8101

Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114

Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

### By E-mail:

Asia Sales: <a href="mailto:asiasales@protekdevices.com">asiasales@protekdevices.com</a>
Europe Sales: <a href="mailto:europesales@protekdevices.com">europesales@protekdevices.com</a>
U.S. Sales: <a href="mailto:ussales@protekdevices.com">ussales@protekdevices.com</a>
Distributor Sales: <a href="mailto:distysales@protekdevices.com">distysales@protekdevices.com</a>
Customer Service: <a href="mailto:service@protekdevices.com">service@protekdevices.com</a>

Customer Service: <a href="mailto:service@protekdevices.com">service@protekdevices.com</a>
Technical Support: <a href="mailto:support@protekdevices.com">support@protekdevices.com</a>

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19

Zervex

Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

#### Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2012 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.