

# SHINDENGEN

## Schottky Rectifiers (SBD)

Single

# D2FS6

## 60V 1.5A


### FEATURES

- Small SMT
- $T_j 150^{\circ}\text{C}$
- $P_{RRSM}$  avalanche guaranteed

### APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

### OUTLINE DIMENSIONS

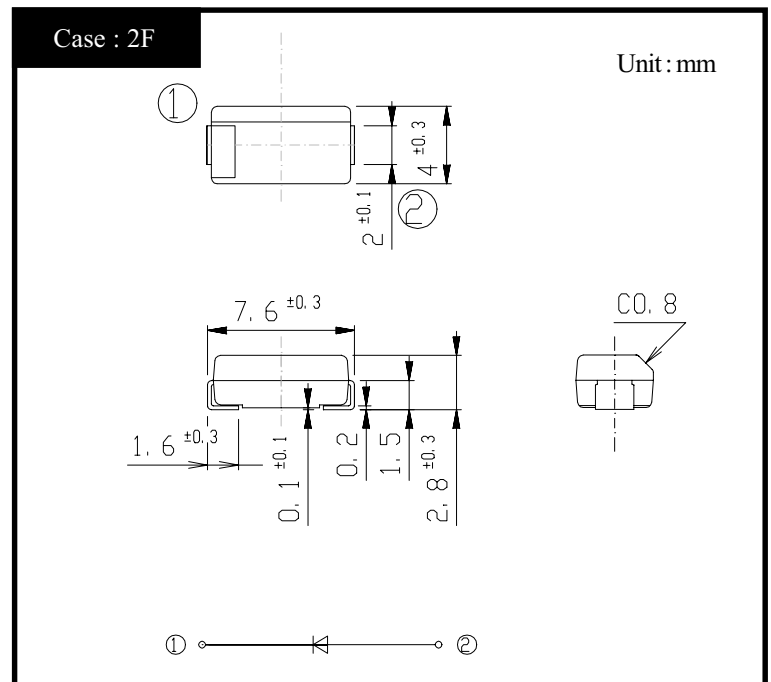

### RATINGS

#### ● Absolute Maximum Ratings (If not specified $T_I=25^{\circ}\text{C}$ )


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	$T_{stg}$		-40~150	$^{\circ}\text{C}$
Operating Junction Temperature	$T_j$		150	$^{\circ}\text{C}$
Maximum Reverse Voltage	$V_{RM}$		60	V
Repetitive Peak Surge Reverse Voltage	$V_{RRSM}$	Pulse width 0.5ms, duty 1/40	65	V
Average Rectified Forward Current	$I_O$	50Hz sine wave, R-load $T_a=31^{\circ}\text{C}$ On alumina substrate	1.5	A
		50Hz sine wave, R-load $T_a=26^{\circ}\text{C}$ On glass-epoxy substrate	1.1	
Peak Surge Forward Current	$I_{FSM}$	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=25^{\circ}\text{C}$	60	A
Repetitive Peak Surge Reverse Power	$P_{RRSM}$	Pulse width 10 $\mu\text{s}$ , $T_j=25^{\circ}\text{C}$	330	W

#### ● Electrical Characteristics (If not specified $T_I=25^{\circ}\text{C}$ )

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	$V_F$	$I_F=2\text{A}$ , Pulse measurement	Max.0.58	V
Reverse Current	$I_R$	$V_R=V_{RM}$ , Pulse measurement	Max.2	mA
Junction Capacitance	$C_j$	$f=1\text{MHz}$ , $V_R=10\text{V}$	Typ.120	pF
Thermal Resistance	$\theta_{jl}$	junction to lead	Max.24	$^{\circ}\text{C}/\text{W}$
	$\theta_{ja}$	junction to ambient On alumina substrate	Max.90	
		junction to ambient On glass-epoxy substrate	Max.126	


# D2FS6

# Forward Voltage

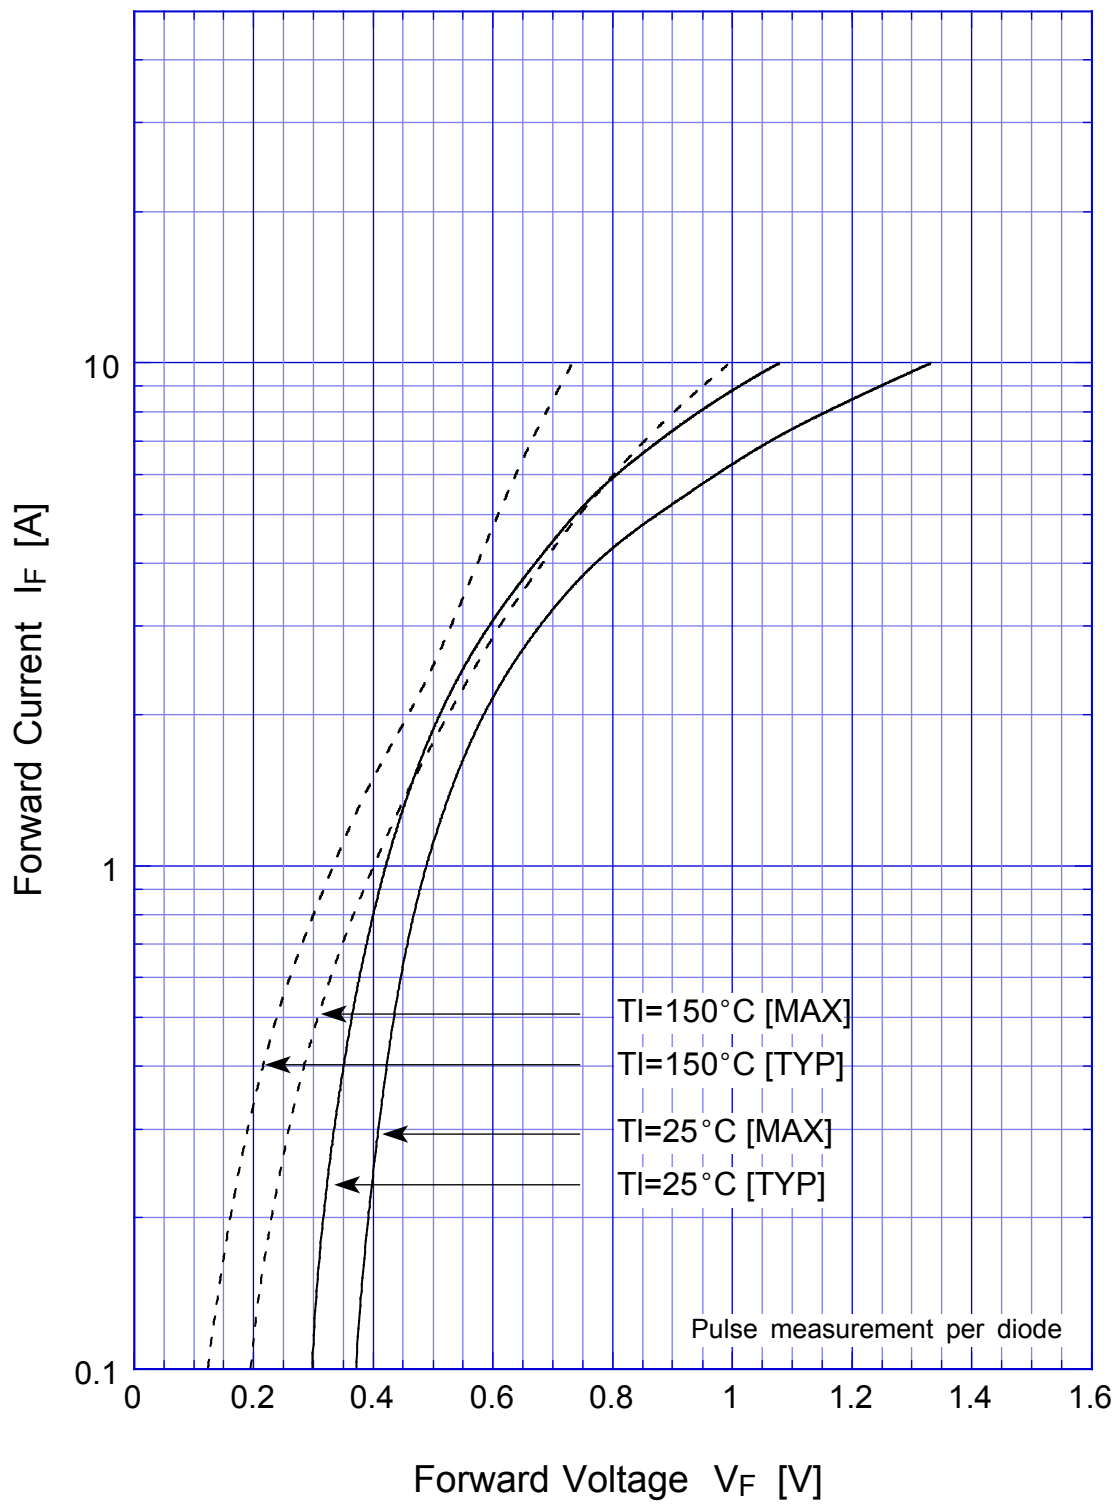


# D2FS6

## Junction Capacitance

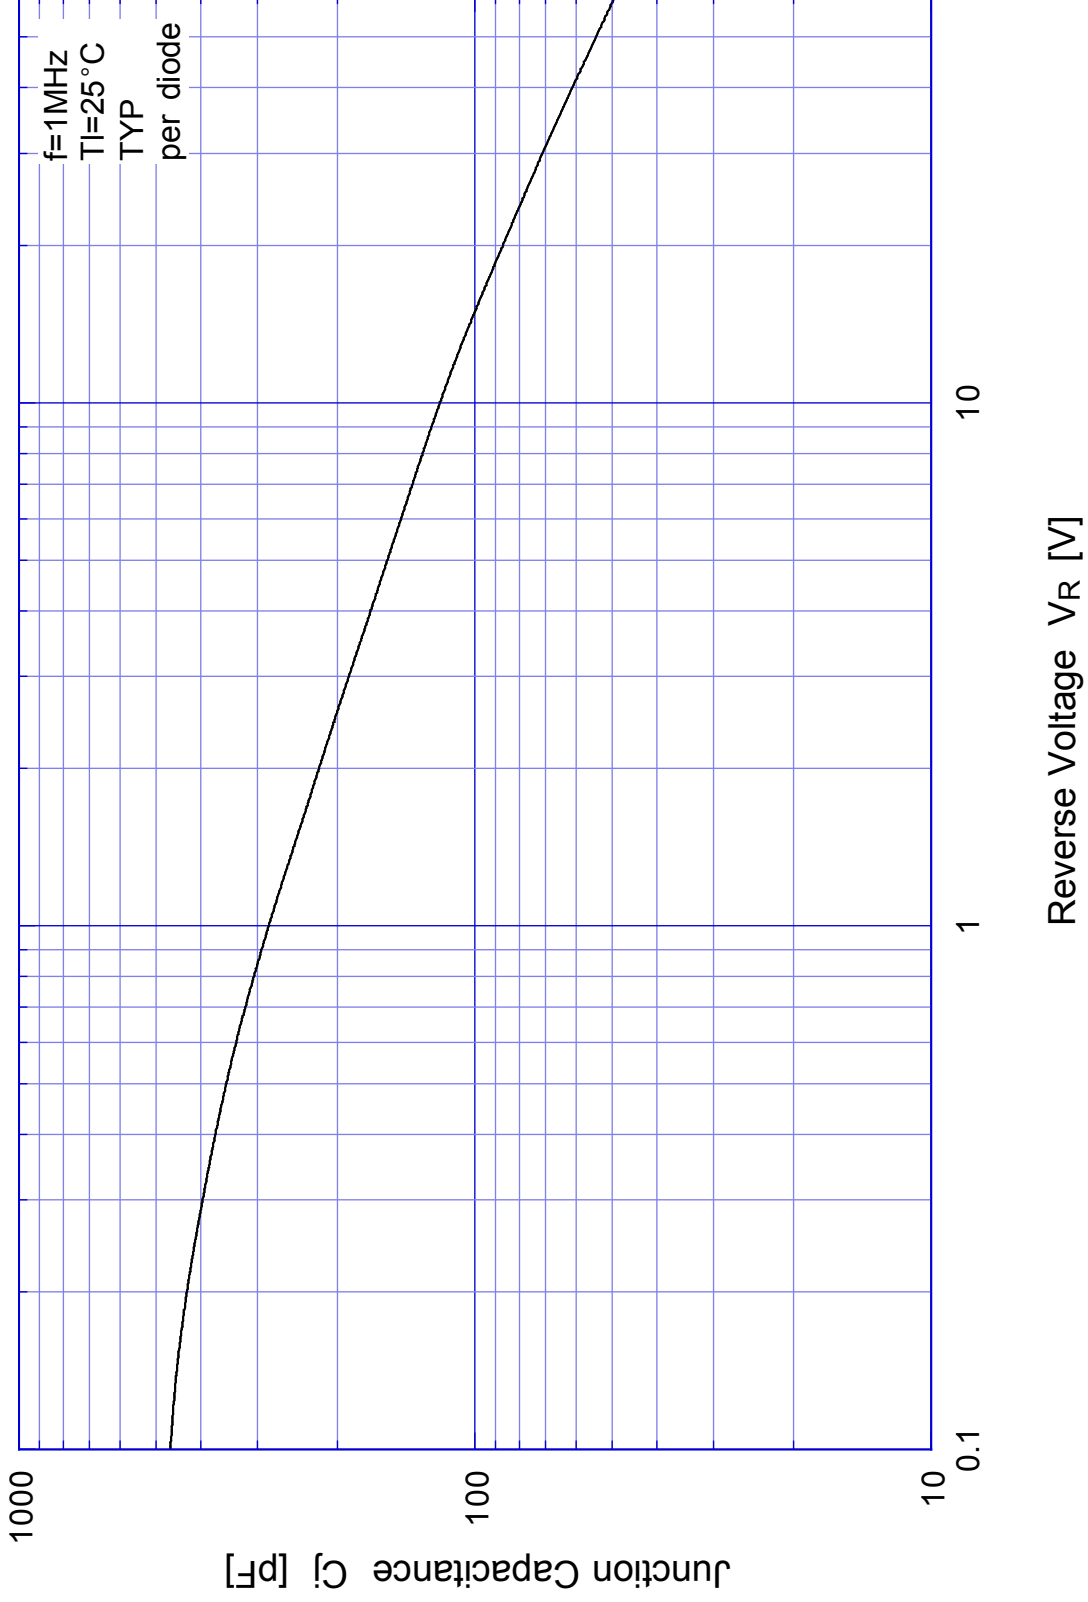


# D2FS6

# Reverse Current

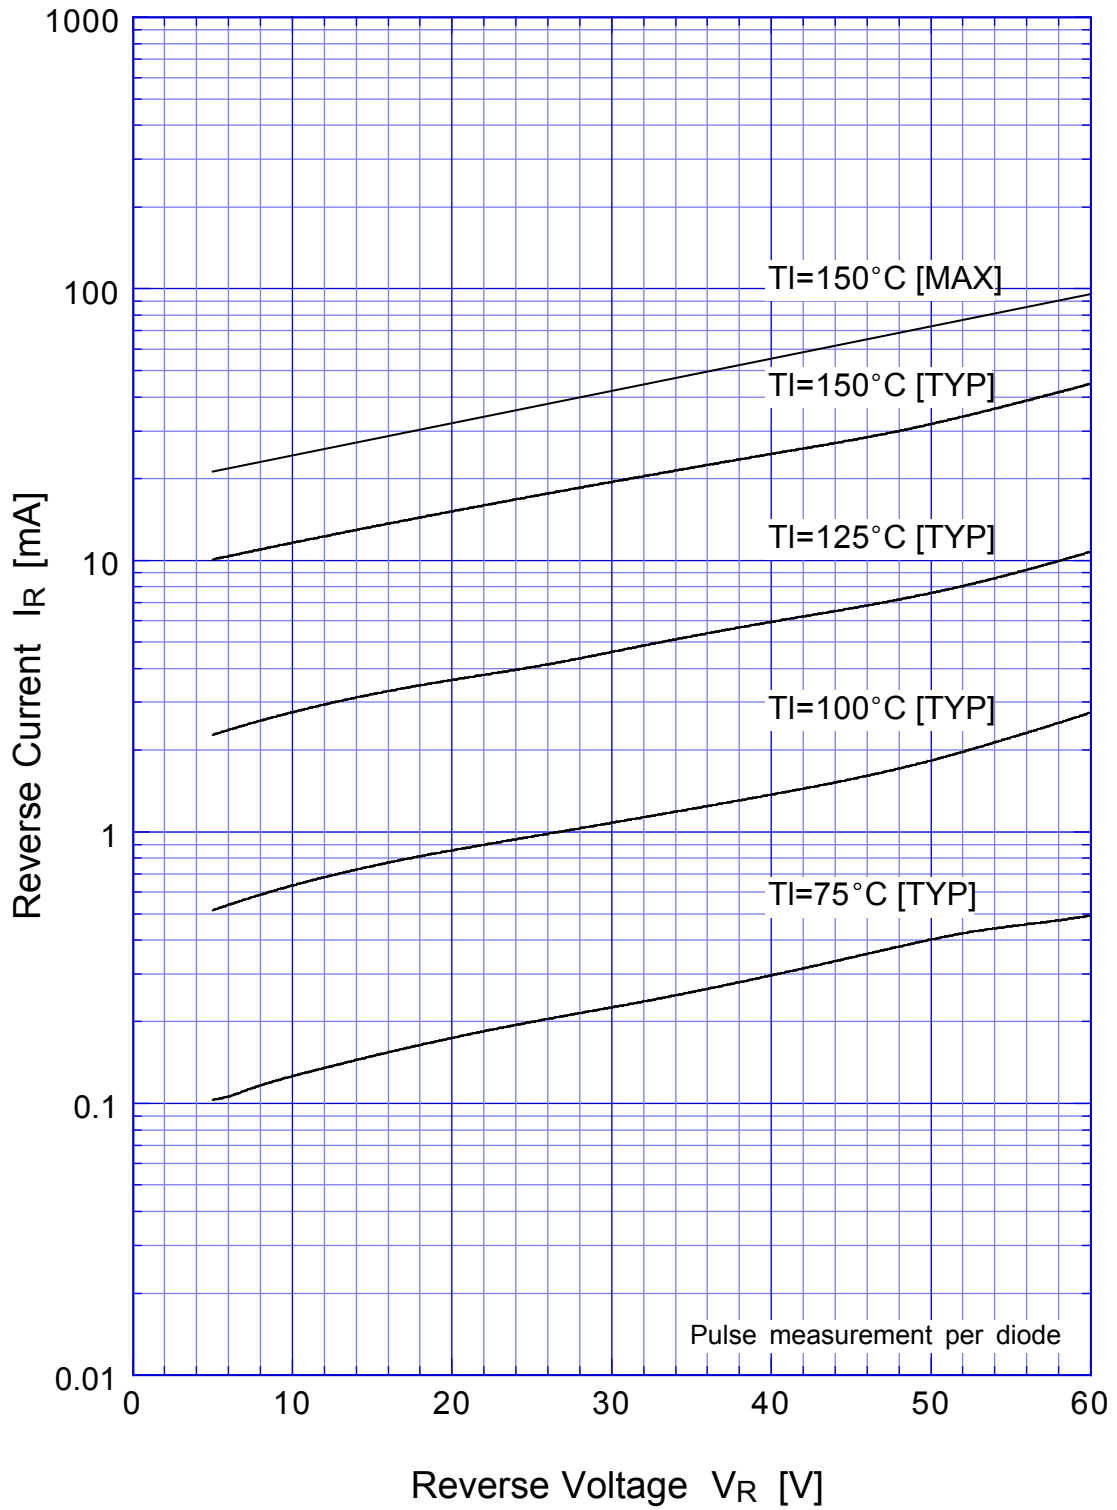


# D2FS6

# Reverse Power Dissipation

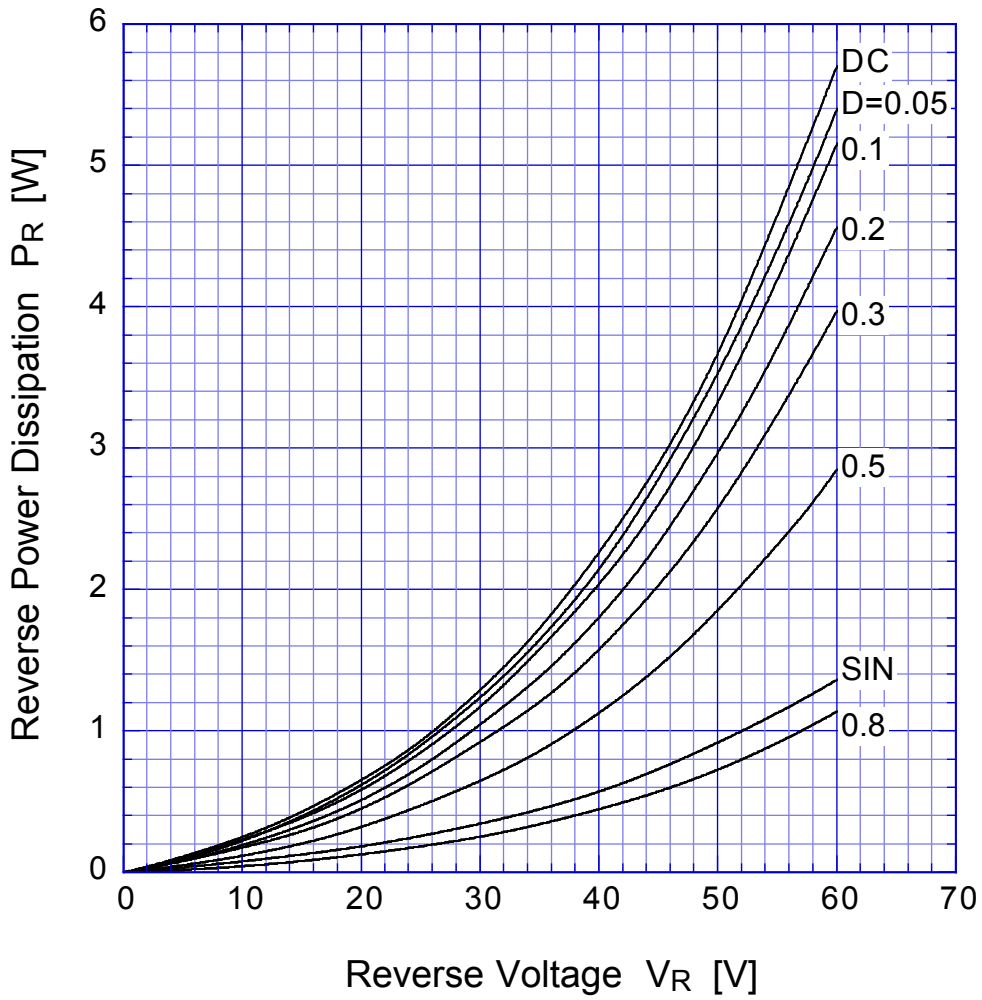


$T_j = 150^\circ\text{C}$

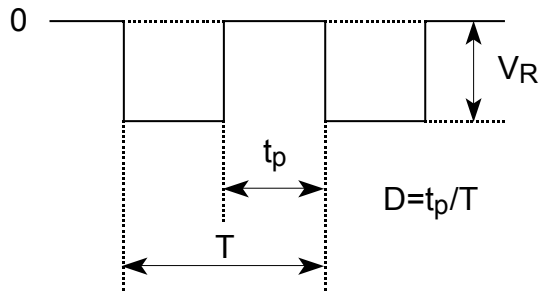


# D2FS6

# Forward Power Dissipation

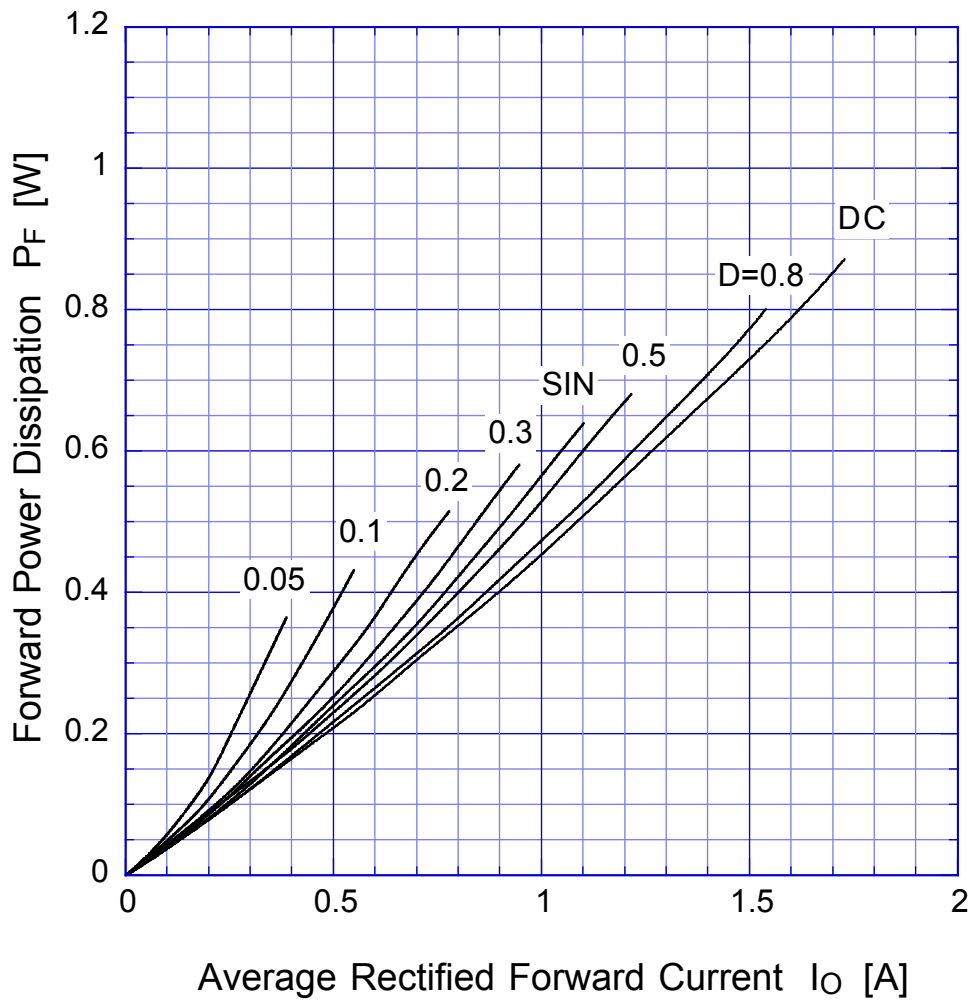


$T_j = 150^\circ\text{C}$

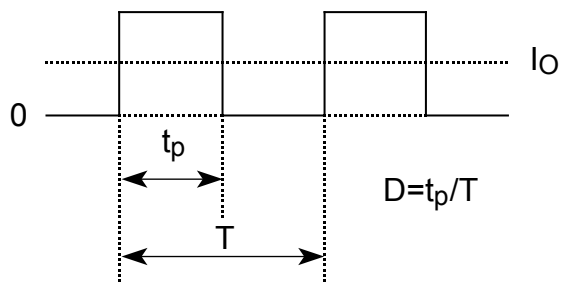


# D2FS6

# Derating Curve

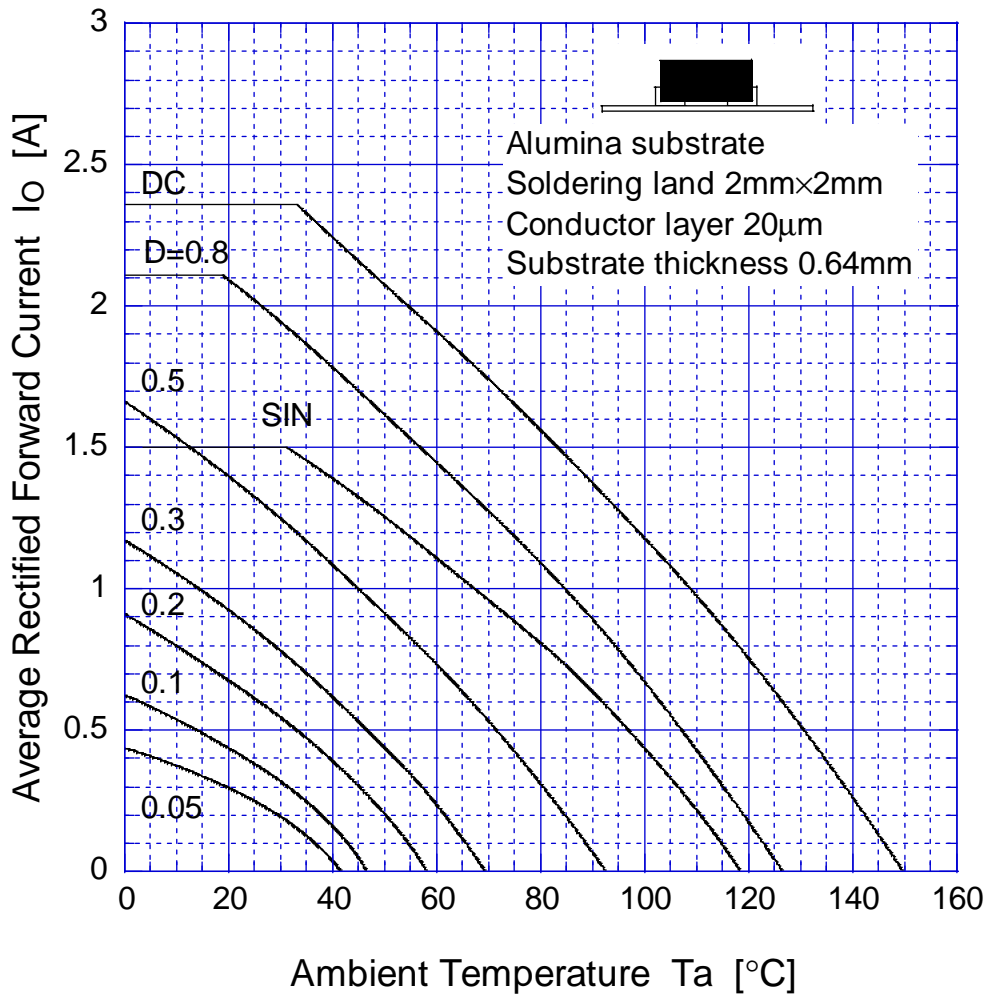


$V_R = 30V$

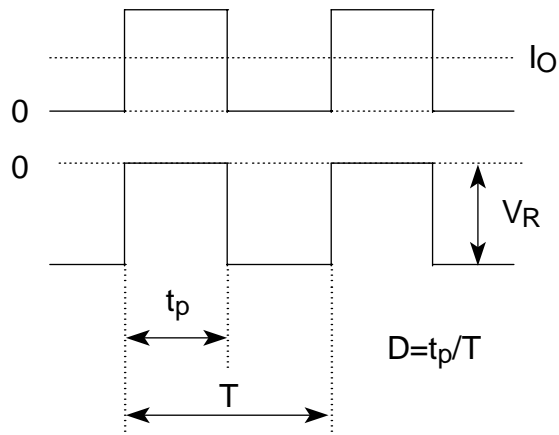


# D2FS6

# Derating Curve

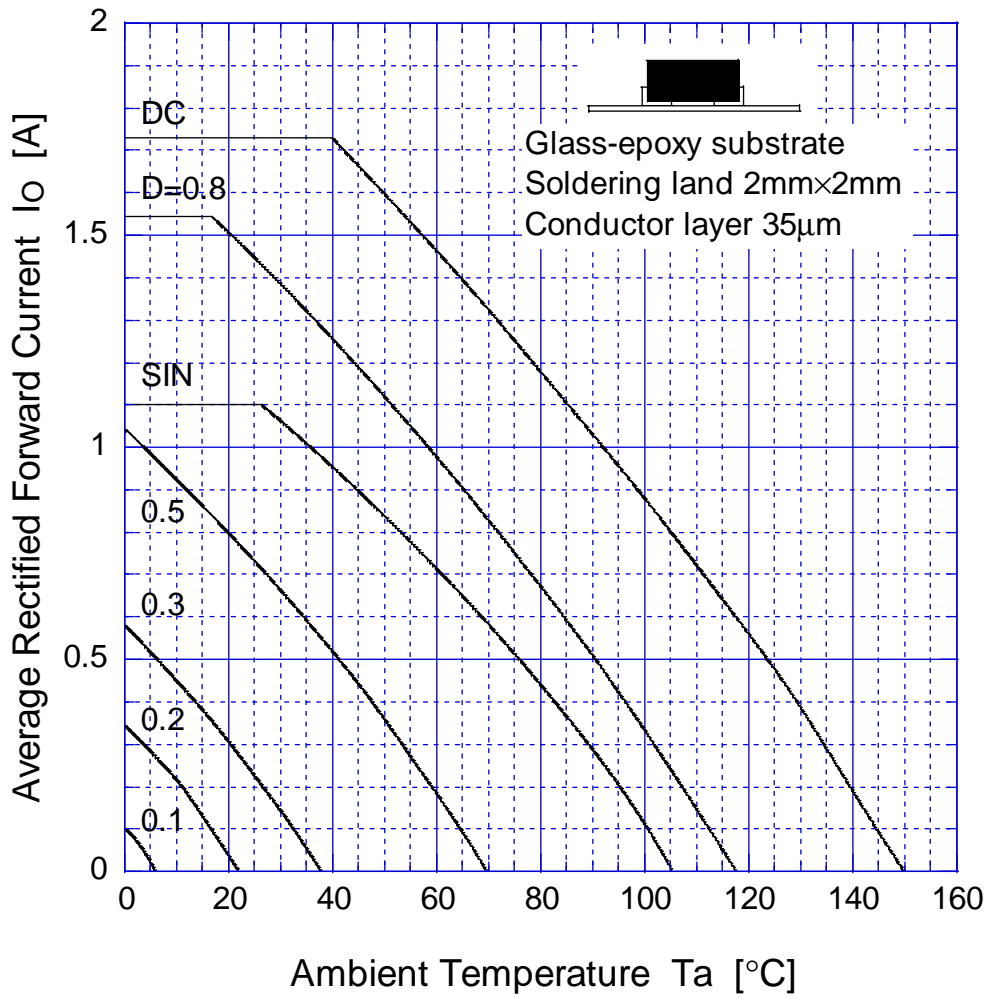


$V_R = 30V$

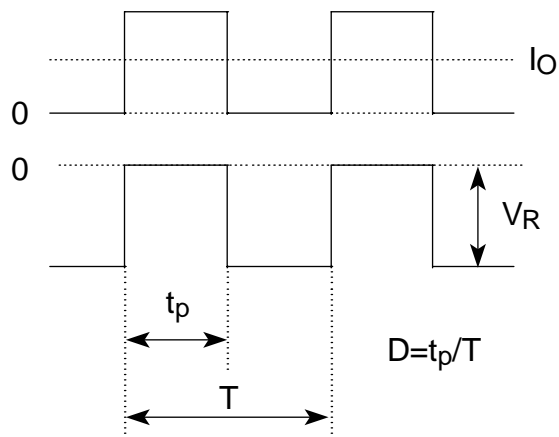




# D2FS6

## Peak Surge Forward Capability

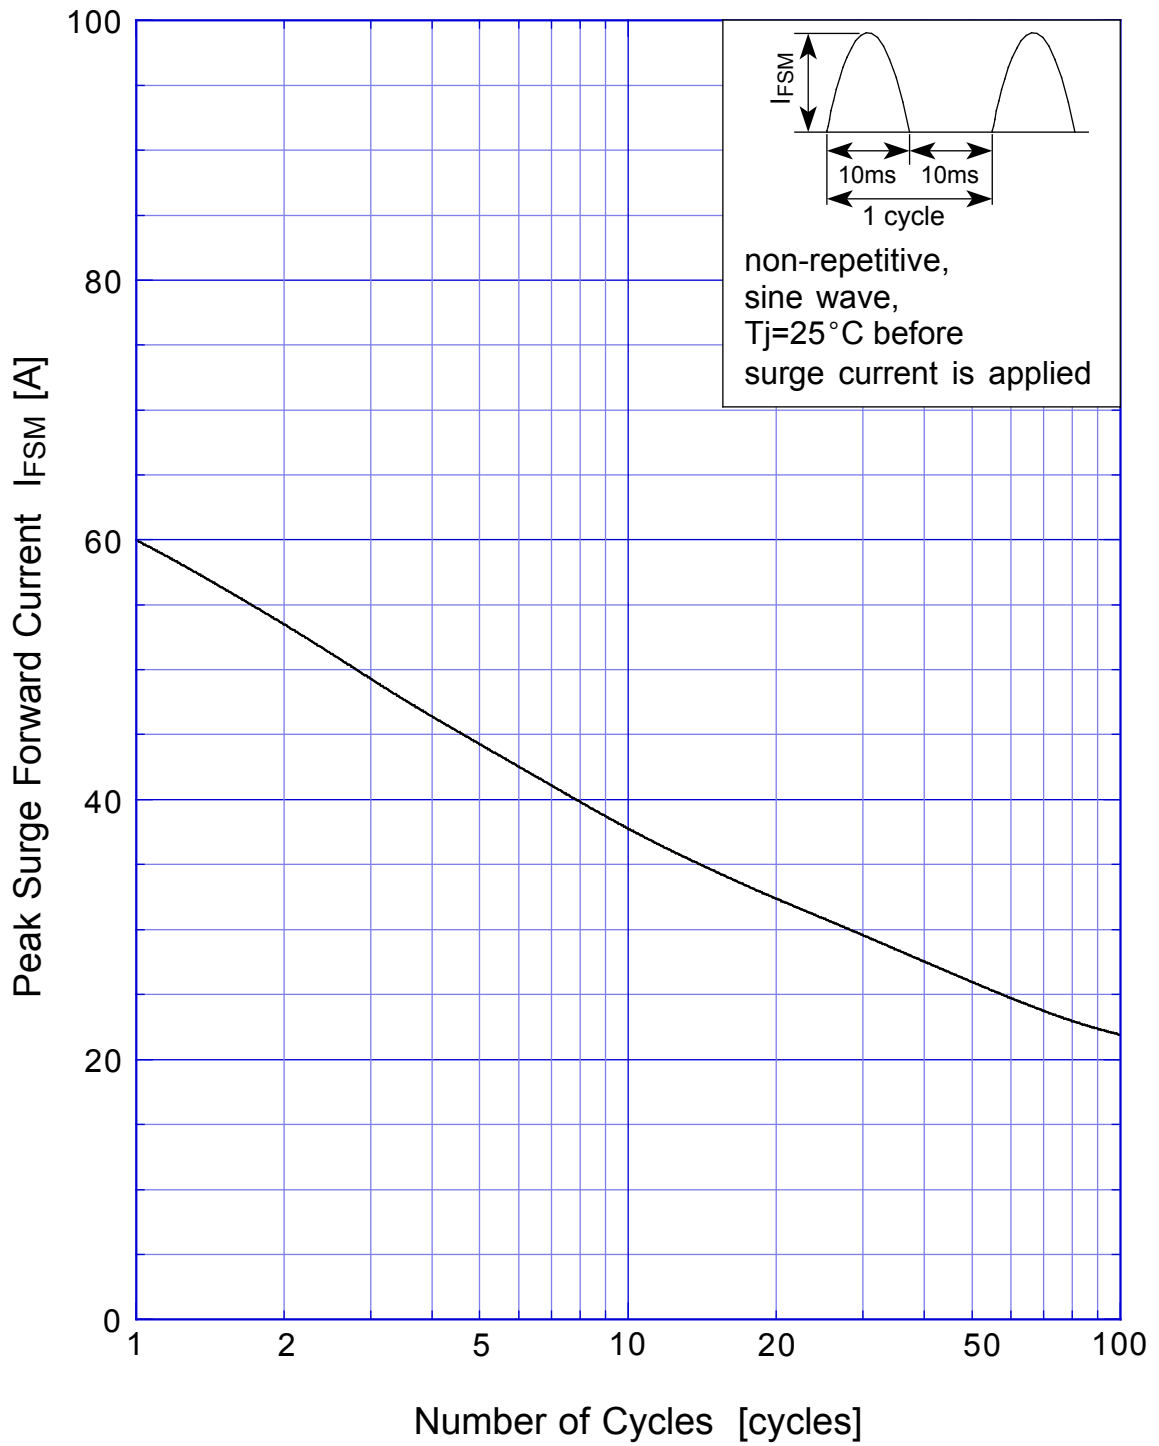

# SBD Repetitive Surge Reverse Power Derating Curve

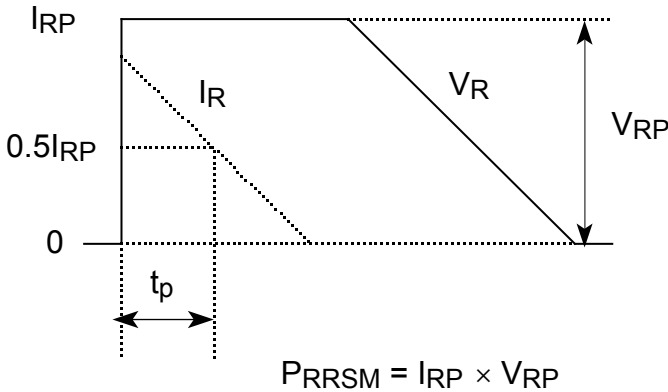

# SBD

## Repetitive Surge Reverse Power Capability

