

# SAW filters for infrastructure systems

# Series/Type: B3882

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39171B3882Z710		2012-01-13	2012-12-31	2013-03-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

B3882

168,96 MHz

# SAW Components

#### **Low-Loss Filter**

**Data Sheet** 

### Features

- Low-loss filter
- Multichannel CDMA2000 capable
- Balanced or unbalanced operation possible
- Temperature stable
- Hermetically sealed ceramic SMD package

### Terminals

Gold plated


# 

Ceramic package QCC10B

#### Dimensions in mm, approx. weight 0,23 g

#### **Pin configuration**

10Input9Input ground or balanced input5Output4Output ground or balanced output2, 7Ground1, 3, 6, 8To be grounded



Туре	Ordering code	Marking and Package	Packing	
		according to	according to	
B3882	B39171-B3882-Z710	C61157-A7-A49	F61074-V8172-Z000	

Electrostatic Sensitive Device (ESD)


#### **Maximum ratings**

Operable temperature range	Т	-40/ +85	°C
Storage temperature range	$T_{stg}$	-40/ +85	°C
DC voltage	V <sub>DC</sub>	5	V
Source power	Ps	10	dBm

SAW Components						B3882
Low-Loss Filter					168,9	6 MHz
Data Sheet						
Characteristics						
Operating temperature:	T = 0	) +85	°C			
Terminating source impedance:	Z <sub>S</sub> =5	$50 \ \Omega \sin \theta$	igle endec	l and match	ing netwo	ork
Terminating load impedance:	Z <sub>S</sub> =5	$50~\Omega$ sin	igle endec	l and match	ing netwo	ork
			min.	typ.	max.	
Nominal frequency		f <sub>N</sub>		168,96		MHz
Minimum insertion attenuation (including matching network)		$\alpha_{min}$	_	13,0	14,5	dB
Passband width						
$\alpha_{rel} \leq 1   dB$		B <sub>1dB</sub>	_	4,4	—	MHz
$\alpha_{rel} \leq 5 \text{ dB}$		$B_{5dB}$		4,9	—	MHz
$\alpha_{rel} \leq 30 \text{ dB}$		B <sub>30dB</sub>	_	6,1	—	MHz
Amplitude ripple <sup>1)</sup> (p-p)		Δα				
	92 MHz		_	0,5	0,9	dB
$f_{\rm N} \pm {\rm k}^{*}1,25~{\rm MHz}\pm 0,6$	6144 MHz		—	0,4	0,7	dB
Group delay ripple (p-p)		Δτ				
	92 MHz		_	70	120	ns
Phase Linearity <sup>1)</sup> (rms)		Δφ				
	92 MHz	r		1,0	1,4	•
$f_{\rm N} \pm k^* 1,25  {\rm MHz} \pm 0,6$	6144 MHz		_	1,0	1,4	°
Average Error Vector Magnitude <sup>1)</sup>		EVM				
	92 MHz			1,9	3,0	%
$f_{\rm N} \pm k^*1,25 \text{ MHz} \pm 0,6$			_	1,9	3,0	%
<b>Relative attenuation</b> (relative to $\alpha_{min}$ )		a				
$f_{\rm N} \pm 2.5$ MHz $f_{\rm N} \pm 3$ ,		$\alpha_{rel}$	4	5		dB
$f_{\rm N} \pm 3,0$ MHz $f_{\rm N} \pm 17,$			10	20	_	dB
$f_{\rm N} \pm 17,5$ MHz $f_{\rm N} \pm 66,$			45	50	_	dB
Temperature coefficient of frequency	2)	TC <sub>f</sub>	_	- 0,036		ppm/K <sup>2</sup>
Turnover temperature		$T_0$		35		°C

<sup>1)</sup>Amplitude ripple/Phase Linearity/Average Error Vector Magnitude: where k = (-1,0,1)

<sup>2)</sup> Temperature dependance of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$ 



B3882 168,96 MHz


# SAW Components

**Low-Loss Filter** 

**Data Sheet** 

# Matching network to 50 $\Omega$ single ended input and output:

(Element values depend upon PCB layout)



L <sub>p1</sub> = 18 nH	L <sub>s3</sub> = 120 nH
L <sub>s2</sub> = 68 nH	C <sub>p4</sub> = 56 pF

B3882


### **SAW Components**

**Low-Loss Filter** 


168,96 MHz

Data Sheet

# Normalized frequency response

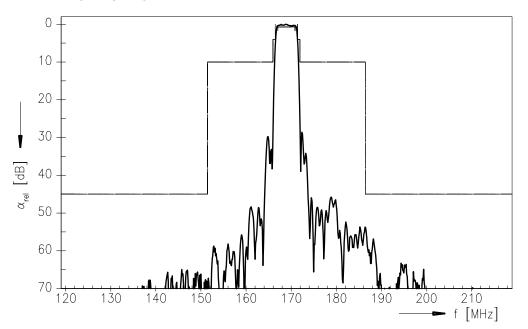

# Normalized frequency response (pass band)

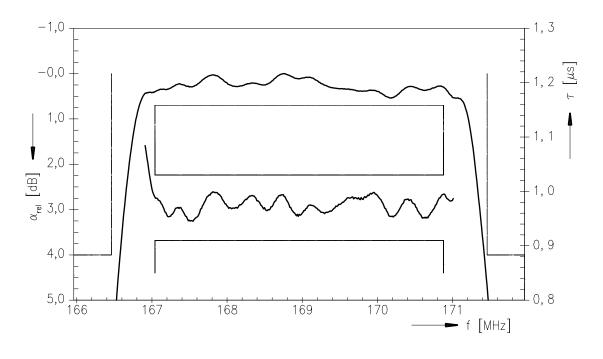

5

Jun 25, 2004

B3882

168,96 MHz

**SAW Components** 

Low-Loss Filter

**Data Sheet** 

#### Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC PD P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.