

SHINDENGEN

Super Fast Recovery Rectifiers

Single

D6L20U

200V 6A


FEATURES

- Low noise
- trr35ns
- Fully Isolated Molding

APPLICATION

- Switching power supply
- Free Wheel
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

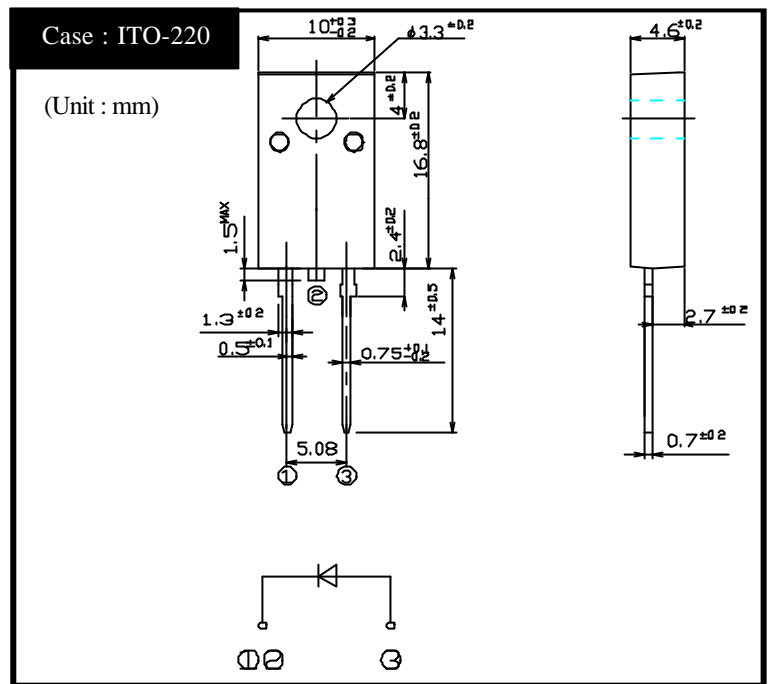

RATINGS

Absolute Maximum Ratings (If not specified Tc=25)


| Item | Symbol | Conditions | Ratings | Unit |
|-----------------------------------|------------------|--|-----------|------|
| Storage Temperature | Tstg | | -40 ~ 150 | |
| Operating Junction Temperature | Tj | | 150 | |
| Maximum Reverse Voltage | V _{RM} | | 200 | V |
| Average Rectified Forward Current | I _O | 50Hz sine wave, R-load, Tc=118 | 6 | A |
| Peak Surge Forward Current | I _{FSM} | 50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25 | 80 | A |
| Dielectric Strength | V _{dis} | Terminals to case, AC 1 minute | 1.5 | kV |
| Mounting Torque | TOR | (Recommended torque :N·m) | 0.5 | N·m |

Electrical Characteristics (If not specified Tc=25)

| Item | Symbol | Conditions | Ratings | Unit |
|-----------------------|----------------|---|---------|------|
| Forward Voltage | V _F | I _F =6A, Pulse measurement | Max.1.1 | V |
| Reverse Current | I _R | V _R =V _{RM} , Pulse measurement | Max.10 | μ A |
| Reverse Recovery Time | trr | I _F =0.5A, I _R =1A | Max.35 | ns |
| Thermal Resistance | jc | junction to case | Max.4.2 | /W |


D6L20U

Forward Voltage

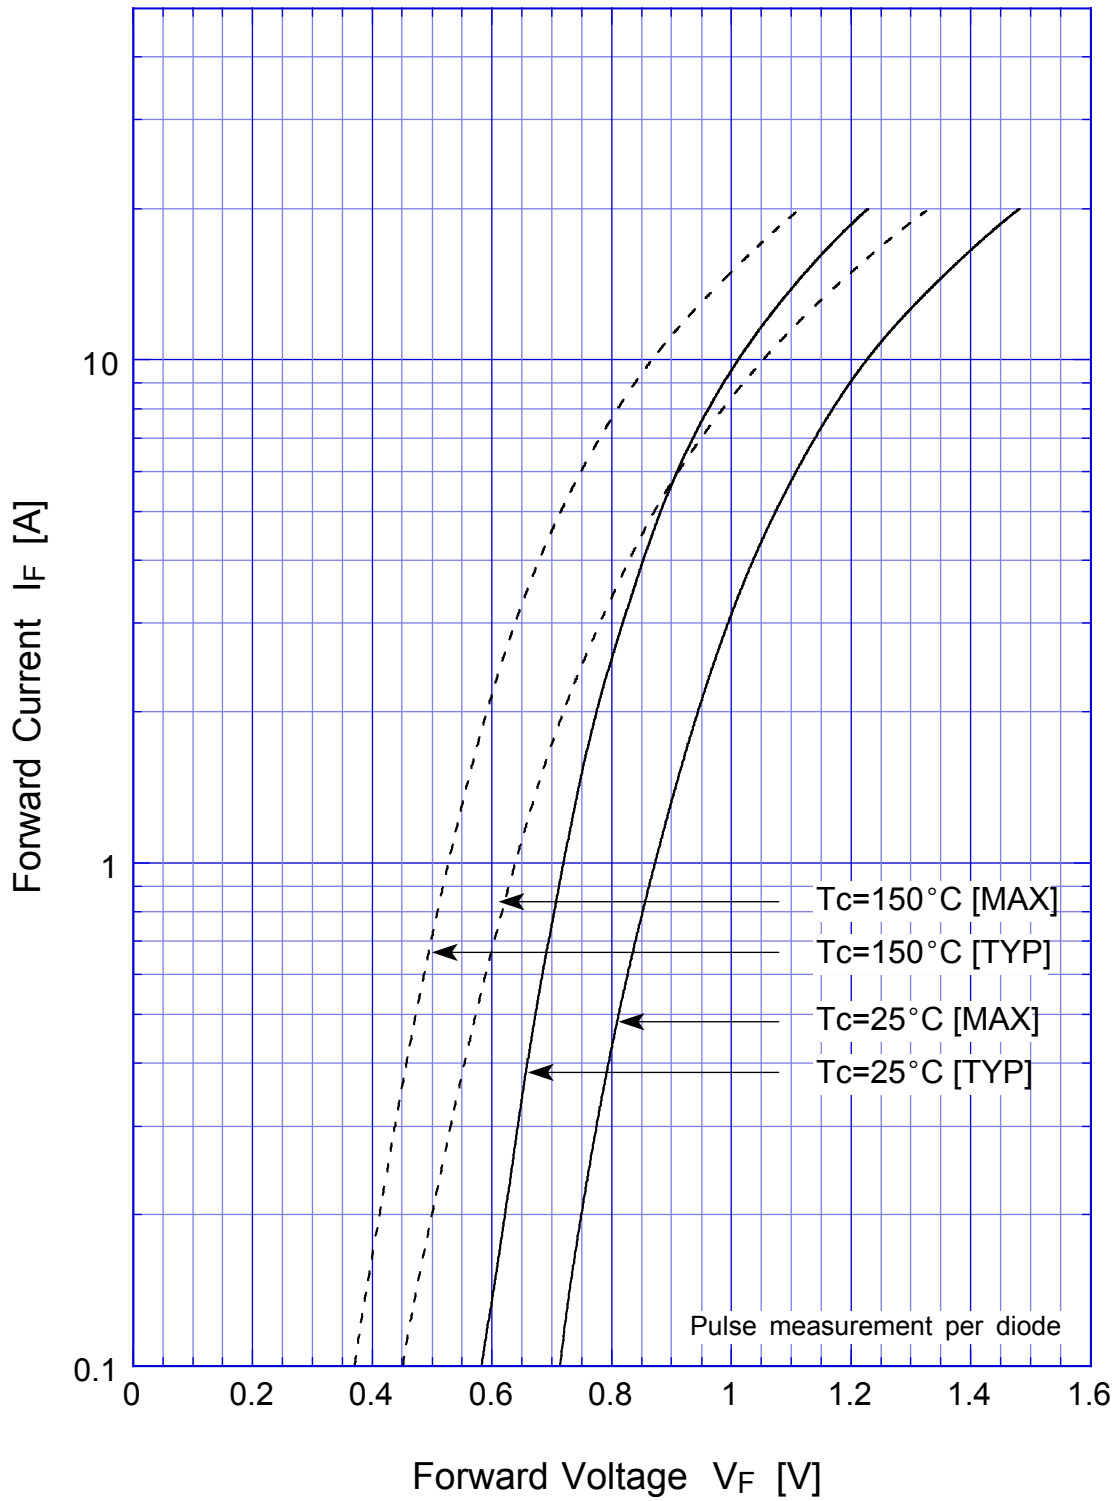


D6L20U

Forward Power Dissipation

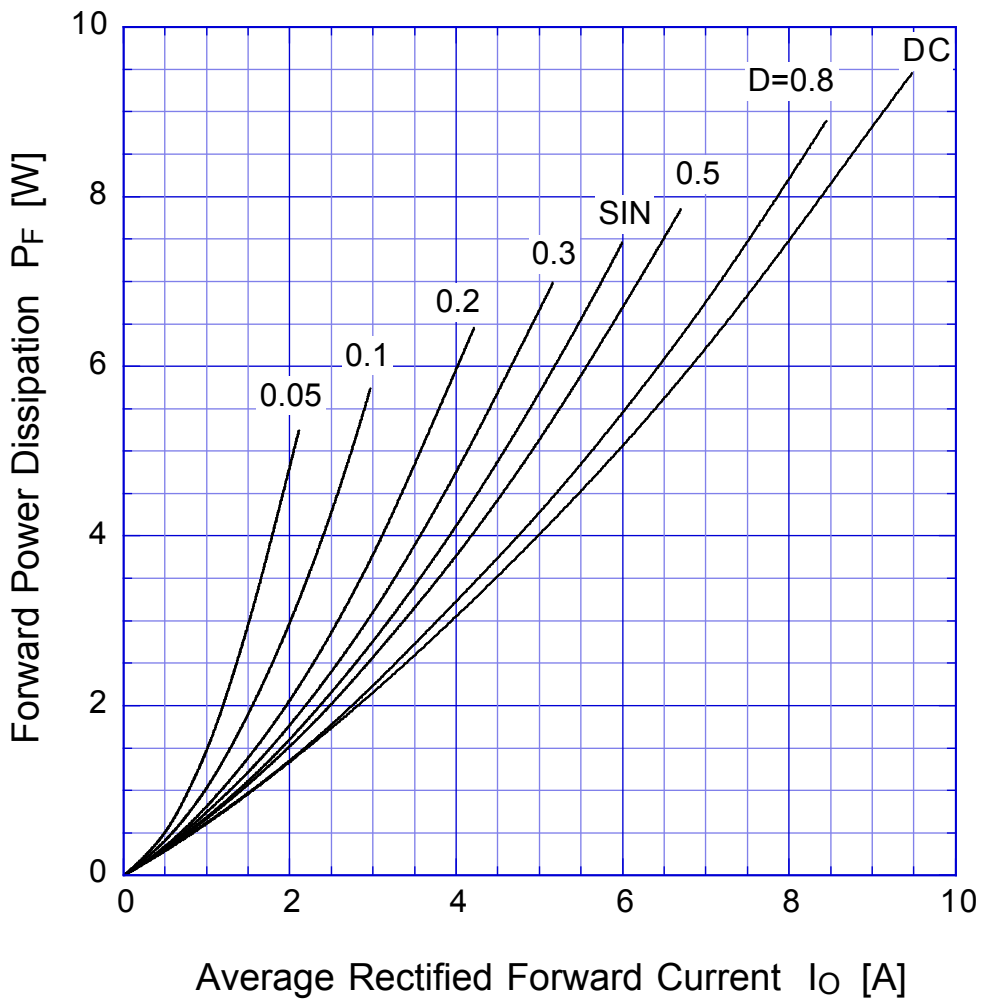


$T_j = T_{jmax}$

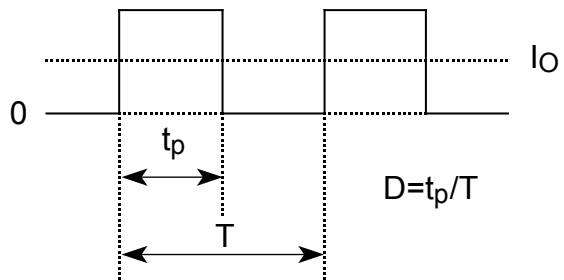

D6L20U

Derating Curve

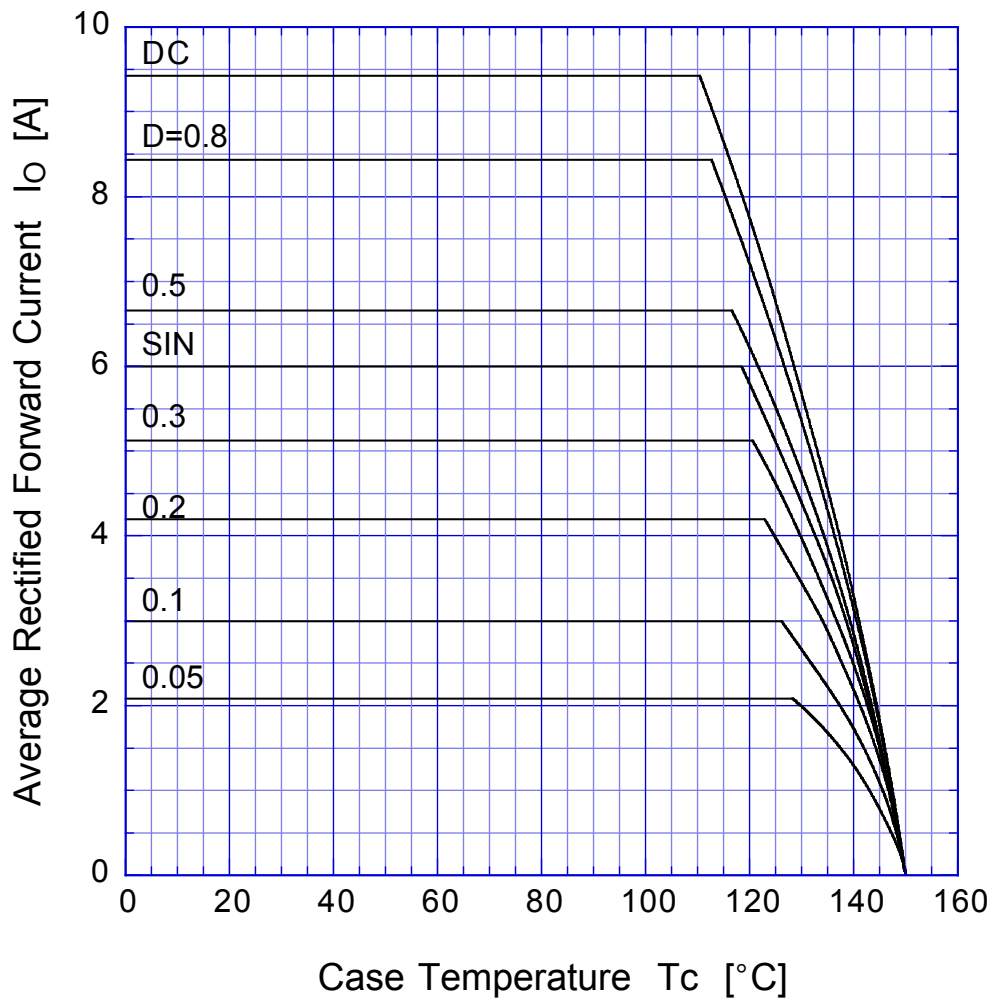


$$V_R = V_{RM}$$



D6L20U

Derating Curve

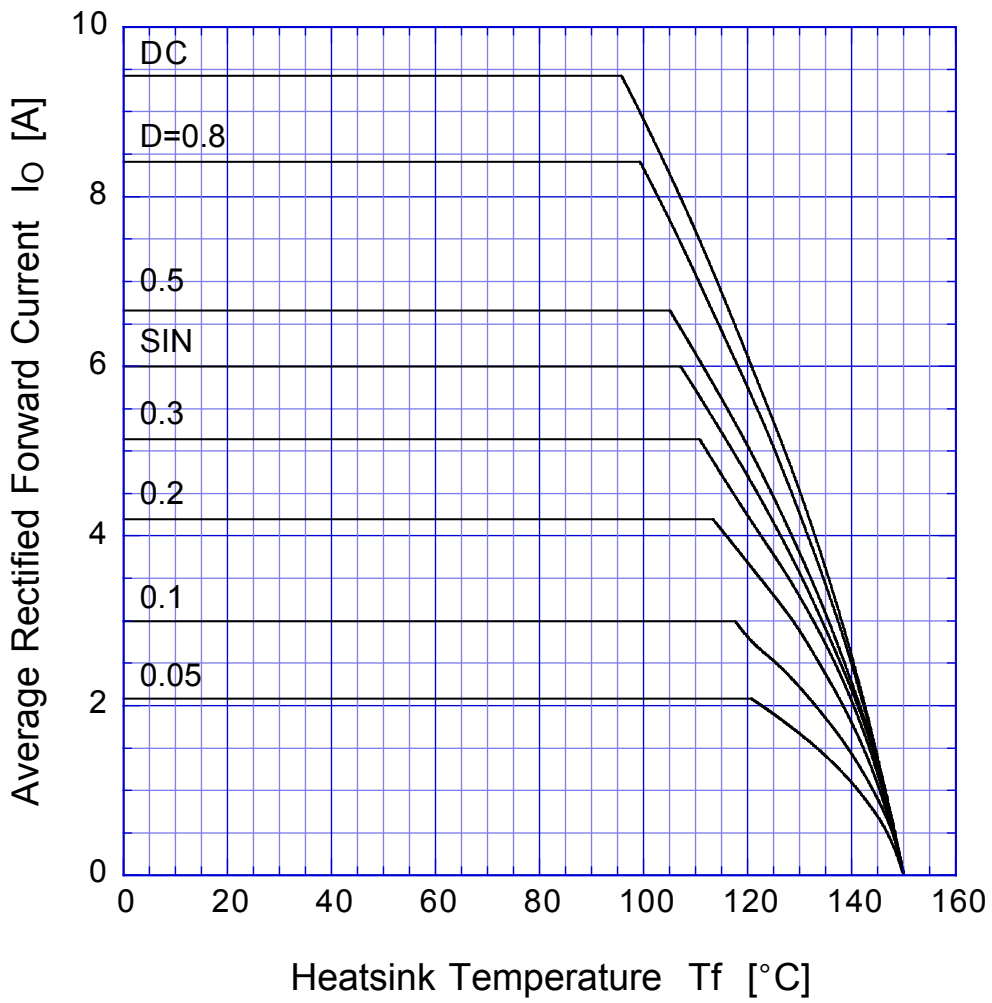


$$V_R = V_{RM}$$



D6L20U

Peak Surge Forward Capability

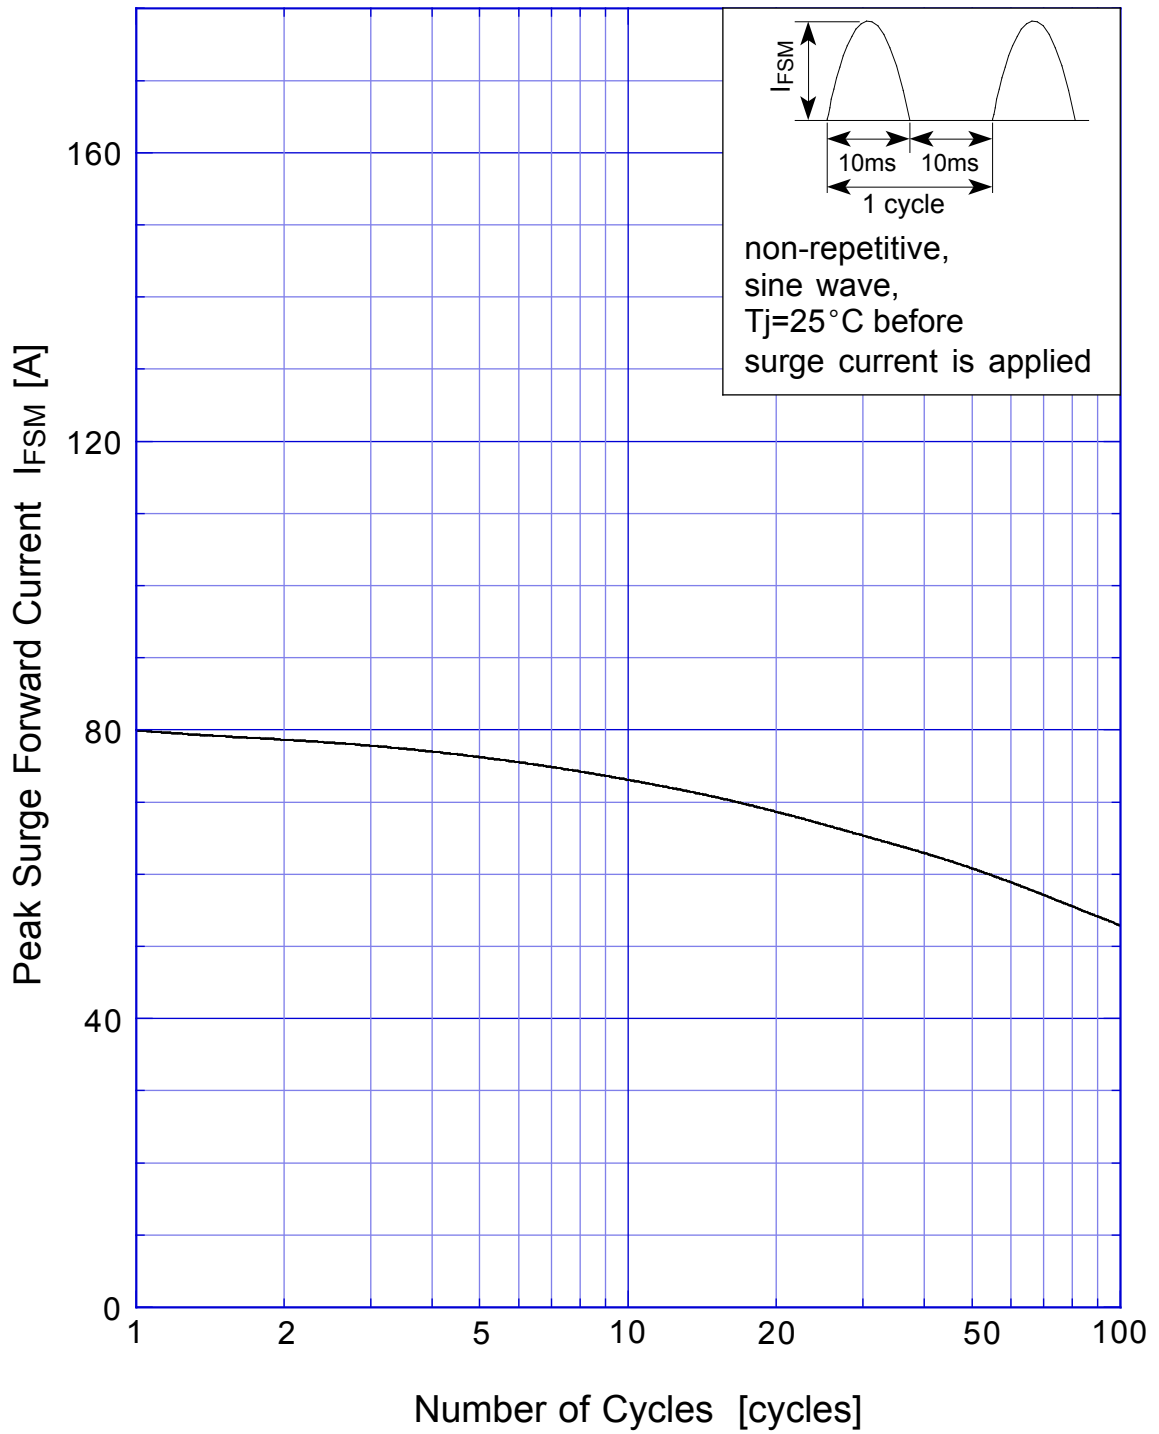

D6L20U Junction Capacitance

