


SWITCHING APPLICATION.  
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

### FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.

### EQUIVALENT CIRCUIT

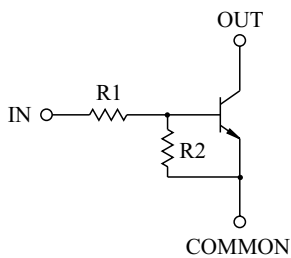

### BIAS RESISTOR VALUES

TYPE NO.	R1(kΩ)	R2(kΩ)
KRC101	4.7	4.7
KRC102	10	10
KRC103	22	22
KRC104	47	47
KRC105	2.2	47
KRC106	4.7	47

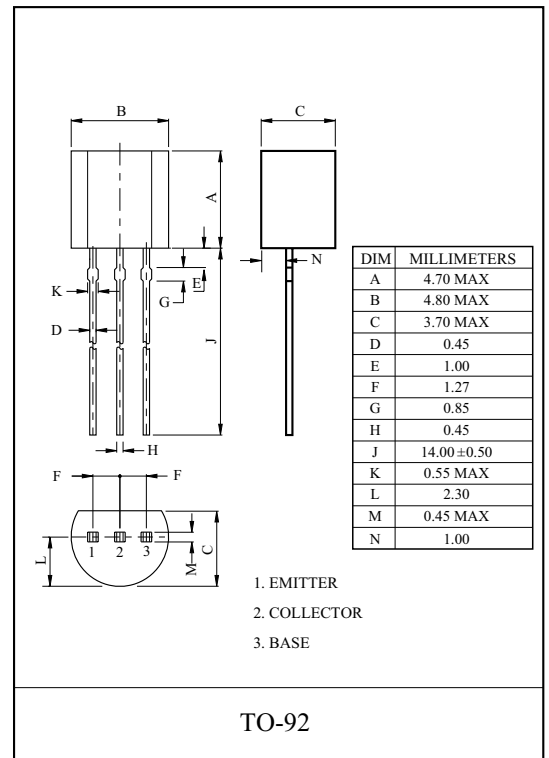

### MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC101 ~ 106	$V_O$	50	V
Input Voltage	KRC101	$V_I$	20, -10	V
	KRC102		30, -10	
	KRC103		40, -10	
	KRC104		40, -10	
	KRC105		12, -5	
	KRC106		20, -5	
Output Current	KRC101 ~ 106	$I_O$	100	mA
Power Dissipation		$P_D$	625	mW
Junction Temperature		$T_j$	150	°C
Storage Temperature Range		$T_{stg}$	-55 ~ 150	°C

# KRC101~KRC106

## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC101 ~ 106	$I_{O(OFF)}$	$V_O=50V, V_I=0$	-	-	500	nA
DC Current Gain	KRC101	$G_I$	$V_O=5V, I_O=10mA$	30	55	-	
	KRC102			50	80	-	
	KRC103			70	120	-	
	KRC104			80	200	-	
	KRC105			80	200	-	
	KRC106			80	200	-	
Output Voltage	KRC101 ~ 106	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	V
Input Voltage (ON)	KRC101	$V_{I(ON)}$	$V_O=0.2V, I_O=5mA$	-	1.5	2.0	V
	KRC102			-	1.8	2.4	
	KRC103			-	2.1	3.0	
	KRC104			-	2.8	5.0	
	KRC105			-	0.8	1.1	
	KRC106			-	0.9	1.3	
Input Voltage (OFF)	KRC101 ~ 104	$V_{I(OFF)}$	$V_O=5V, I_O=0.1mA$	1.0	1.2	-	V
	KRC105 ~ 106			0.5	0.65	-	
Transition Frequency	KRC101 ~ 106	$f_T^*$	$V_O=10V, I_O=5mA$	-	200	-	MHz
Input Current	KRC101	$I_I$	$V_I=5V$	-	-	1.8	mA
	KRC102			-	-	0.88	
	KRC103			-	-	0.36	
	KRC104			-	-	0.18	
	KRC105			-	-	3.6	
	KRC106			-	-	1.8	
Input Resistor	KRC101	R1	-	3.29	4.7	6.11	kΩ
	KRC102			7	10	13	
	KRC103			15.4	22	28.6	
	KRC104			32.9	47	61.1	
	KRC105			1.54	2.2	2.86	
	KRC106			3.29	4.7	6.11	
Input Resistor	KRC101	R2	-	3.29	4.7	6.11	kΩ
	KRC102			7	10	13	
	KRC103			15.4	22	28.6	
	KRC104			32.9	47	61.1	
	KRC105			32.9	47	61.1	
	KRC106			32.9	47	61.1	







Note : \* Characteristic of Transistor Only.

# KRC101~KRC106







## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRC101	V <sub>O</sub> =5V V <sub>IN</sub> =5V R <sub>L</sub> =1kΩ	-	0.03	-	μS
		KRC102		-	0.05	-	
		KRC103		-	0.12	-	
		KRC104		-	0.22	-	
		KRC105		-	0.01	-	
		KRC106		-	0.03	-	
	Storage Time	KRC101		-	2.0	-	
		KRC102		-	2.0	-	
		KRC103		-	2.0	-	
		KRC104		-	2.0	-	
		KRC105		-	2.0	-	
		KRC106		-	2.0	-	
	Fall Time	KRC101		-	0.12	-	
		KRC102		-	0.36	-	
		KRC103		-	0.35	-	
		KRC104		-	0.6	-	
		KRC105		-	0.1	-	
		KRC106		-	0.19	-	

# KRC101~KRC106

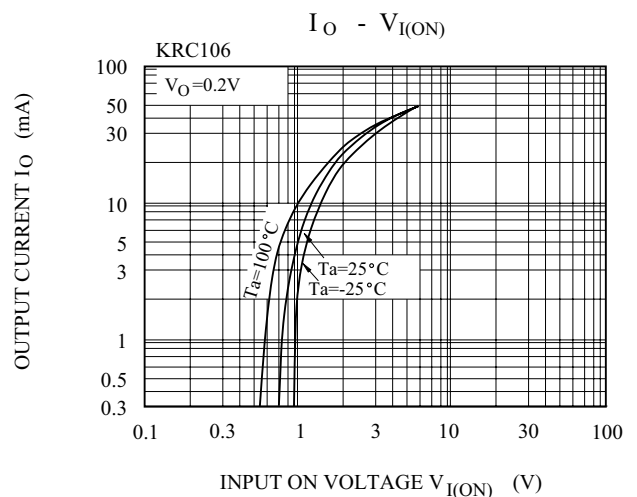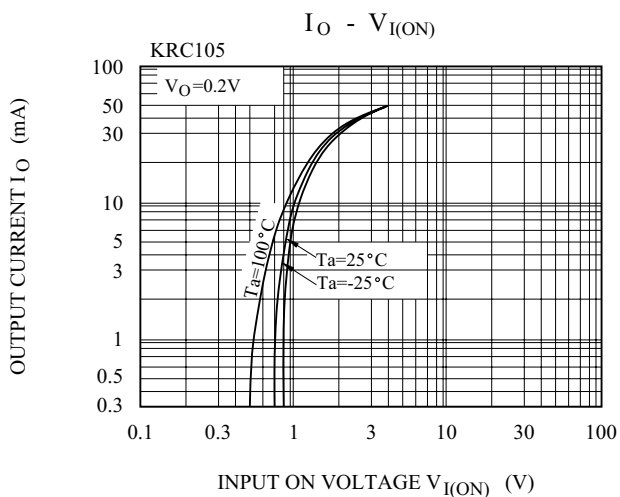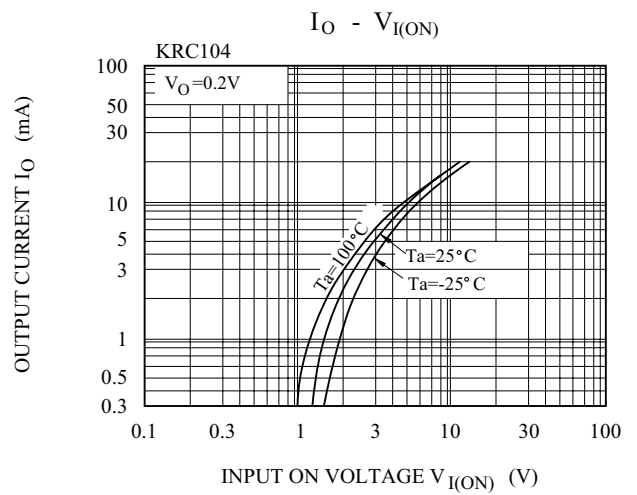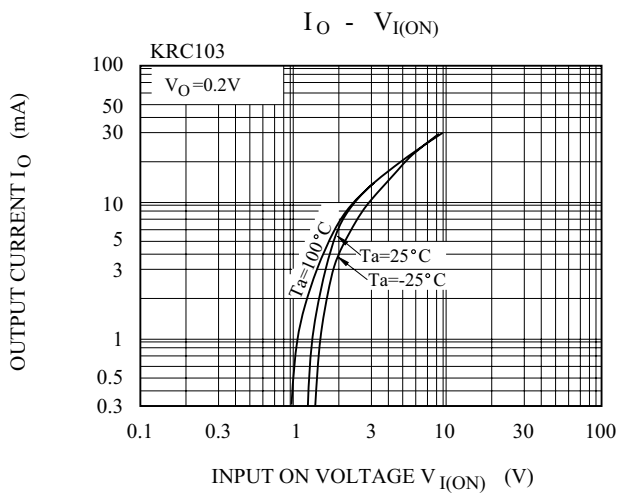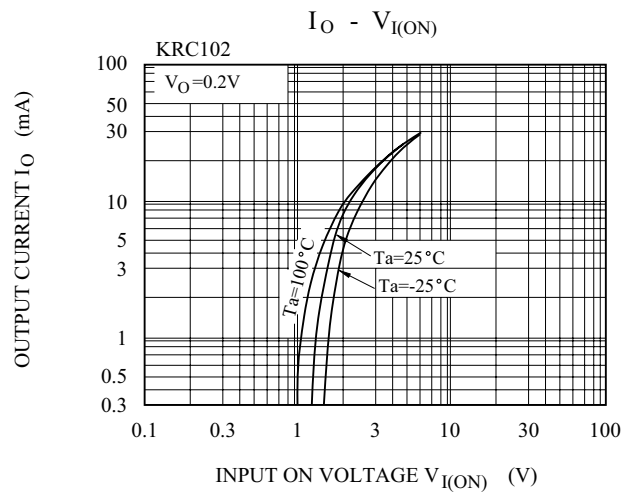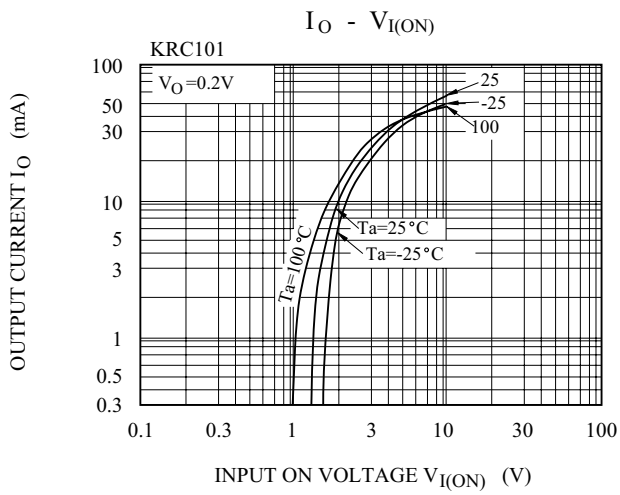

# KRC101~KRC106

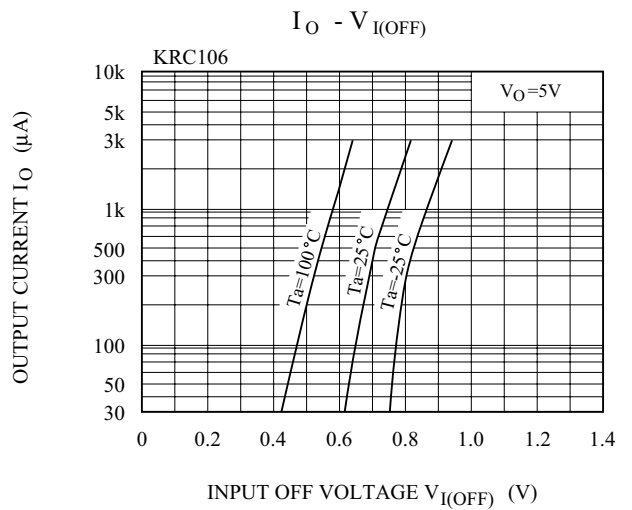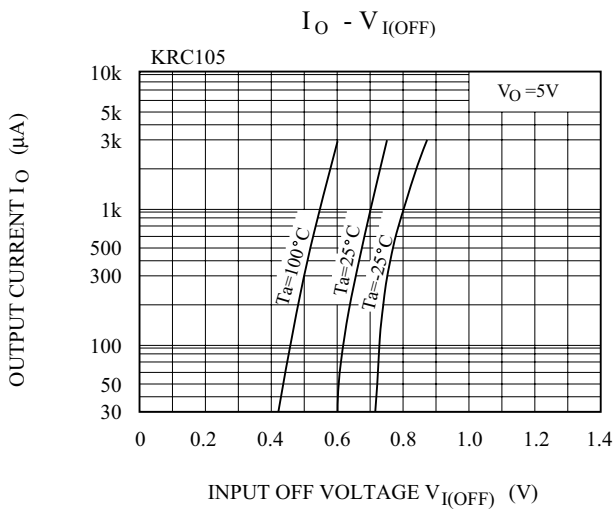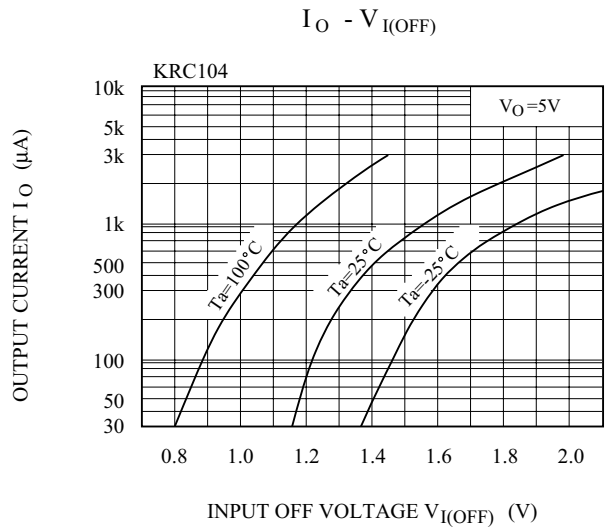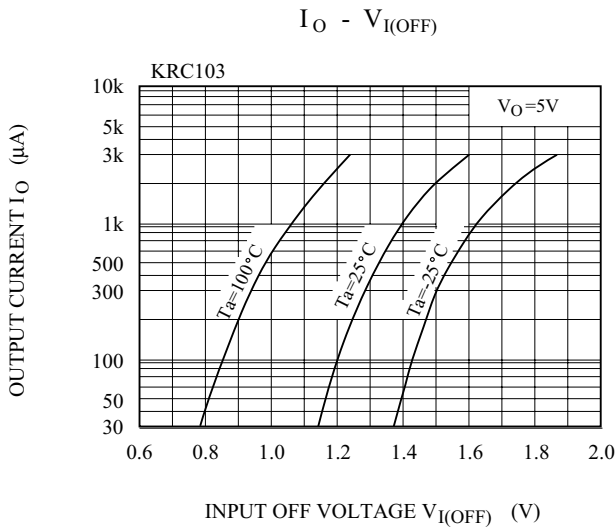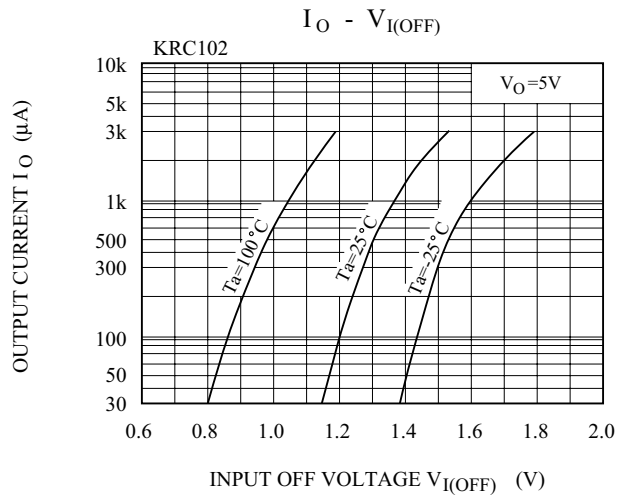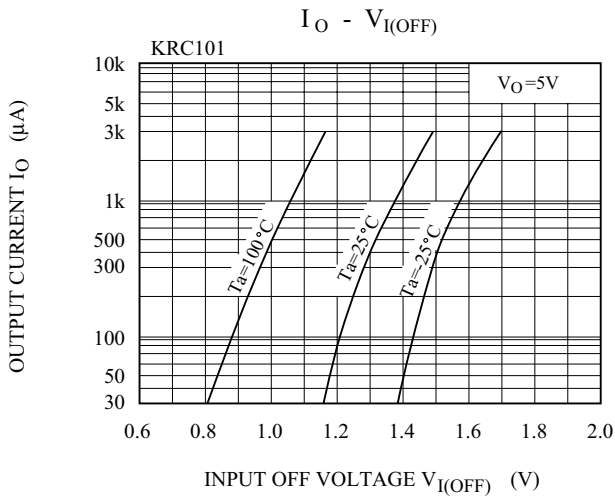

# KRC101~KRC106

