

QuikPAC Module Data

General description:

The **QPP-011 QuikPAC™** RF power module is a Class AB amplifier stage designed for use in the output stage of linear RF power amplifiers for cellular base stations. The power transistors are fabricated using Xemod's advanced design LDMOS process. This unit has a factory set, regulated and temperature compensated gate bias, eliminating the need for the user to provide adjustable gate bias voltage circuits and make individual bias adjustments during stage alignment.

Features:

Single Polarity Operation
 Matched for 50 Ω RF interfaces
 XeMOS FET Technology
 Stable Performance
 QuikPAC System Compatible
 QuikClip or Flange Mounting

Standard Operating Conditions

Parameter	Symbol	Min	Nom	Max	Units
Frequency Range	F	869		894	MHz
Supply (Drain) Voltage	V _D	26.0	28.0	32.0	VDC
Bias (Gate) Voltage	V _G	11.0	12.0	13.0	VDC
Bias (Gate) Current, Average	I _G			40	mA
RF Source & Load Impedance	Ω		50		Ohms
Load Impedance for Stable Operation (All Phases)	VSWR			10:1	
Operating Baseplate Temperature	T _{OP}	-20		+90	°C
Output Device Thermal Resistance, Channel to Baseplate	θ_{jc}		0.8		°C/W

Maximum Ratings

Parameter	Symbol	Value	Units
Supply (Drain) Voltage	V _{DD}	35	VDC
Control (Gate) Voltage, V _{DD} = 0 VDC	V _G	15	VDC
Input RF Power	P _{IN}	10	W
Load Impedance for continuous operation without damage	VSWR	3:1	
Output Device Channel Temperature		200	°C
Lead Soldering Temperature		+190	°C
Storage Temperature	T _{STG}	-65 to +150	°C

Performance at 28VDC & 25°C

Parameter	Symbol	Min	Nom	Max	Units
Supply (Drain) Voltage	V _{D1,2}	27.5	28.0	28.5	VDC
Quiescent Current (total) (1)	I _{DQ}	900	1,000	1,100	mA
Power Output at 1 dB Compression (single tone)	P ₋₁	120	130		W
Gain at 24W PEP (two tone)	G	11.5	12.5		dB
Gain Variation over frequency at 24W Output (two tone)	ΔG		0.3	0.5	dB
Input Return Loss (50 Ω Ref) at 24W PEP (two tone)	IRL	11.0	12.5		dB
Drain Efficiency at 120W P _{out} (single tone)	η	35	40		%
Drain Efficiency at 120W PEP (two tone)	η	28	32		%
3 rd Order IMD Product (2 tone at 120W PEP; 1 MHz spacing)			-28	-26	dBc

XEMOD RESERVES THE RIGHT TO MAKE CHANGES TO THIS SPECIFICATION WITHOUT FURTHER NOTICE. BEFORE THE PRODUCT DESCRIBED HERE IS WRITTEN INTO SPECIFICATIONS OR USED IN CRITICAL APPLICATIONS, THE PERFORMANCE CHARACTERISTICS SHOULD BE VERIFIED BY CONTACTING XEMOD.

Performance at 28VDC & 25°C (continued)

Parameter	Symbol	Min	Nom	Max	Units
IMD Variation – 100 kHz to 25 MHz tone spacing			1.0	2.0	dB
2 nd Harmonic at 120W P _{out} (single tone)					dBc
3 rd Harmonic at 120W P _{out} (single tone)					dBc
Group (Signal) Delay	τ_d		4.0		ns
Transmission Phase Flatness			0.5		degrees

Performance at 28VDC Over Temperature

Parameter	Symbol	Min	Nom	Max	Units
Power Output at 1 dB Compression (single tone)	P ₋₁				W
Gain Variation over frequency at 24W Output (single tone)	ΔG				dB
Input Return Loss (50 Ω Ref) at 24W PEP (two tone)	IRL				dB
Drain Efficiency at 120W PEP (two tone)	η				%
3 rd Order IMD Product (2 tone at 120W PEP; 1 MHz spacing)					dBc
Group (Signal) Delay	τ_d				ns

Notes:

This GR-version QuikPAC module has an internally regulated gate voltage that is preset at the factory. A voltage of +12VDC ($\pm 1V$) should be applied to each gate lead (pins 1 and 5). No further adjustment is required. The gate voltage is thermally compensated for operation over the temperature range listed in the data sheet. Although the module will operate with lower voltages applied, the internal regulator is not functioning and the specified performance may not be achieved.

Gate voltage must be applied coincident with or after application of the drain voltage to prevent potentially destructive oscillations. Bias voltages should never be applied to a module unless it is terminated on both input and output.


The quiescent current set during manufacture will be within the range specified in the Performance section (nominal $\pm 10\%$) and is selected to balance IMD, input return loss, and efficiency. This setting is suitable for most applications. Modules with different optimization profiles are available by special order.

Internal RF decoupling is included on all bias leads. No additional bypass elements are required, however some applications may require energy storage on the drain leads to accommodate time-varying waveforms.

The RF leads are internally protected against DC voltages up to 100V. Care should be taken to avoid video transients that may damage the active devices.

Package Styles

This model is available in both B2 (H10537) and B2F (H10894) package styles. Style B2F is shown for reference. Please see the applicable outline drawing for specific dimensions.

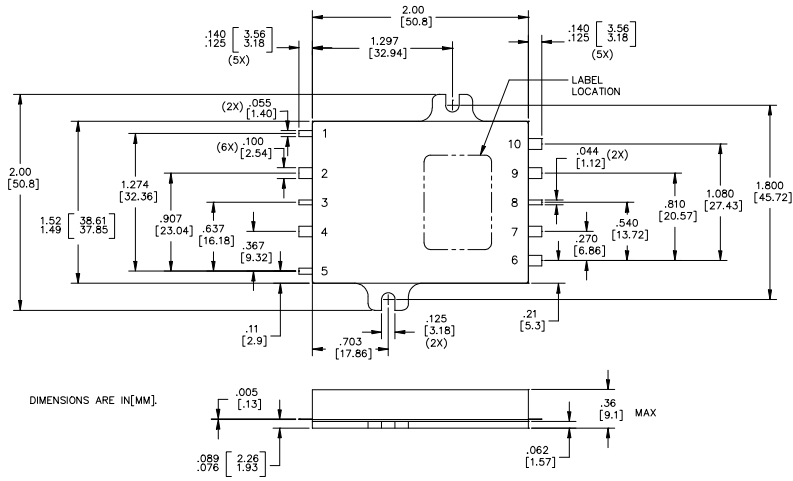

LEAD IDENTIFICATION	
Lead No.	Function
1	Bias 1
2	Ground
3	Input
4	Ground
5	Bias 2
6	V _{cc2}
7	Ground
8	Output
9	Ground
10	V _{cc1}