

AP60N03GS/P


Pb Free Plating Product





**Advanced Power
Electronics Corp.**

**N-CHANNEL ENHANCEMENT MODE
POWER MOSFET**

- ▼ Low On-Resistance
- ▼ Fast Switching
- ▼ Simple Drive Requirement



BV_{DSS}	30V
$R_{DS(ON)}$	13.5mΩ
I_D	55A

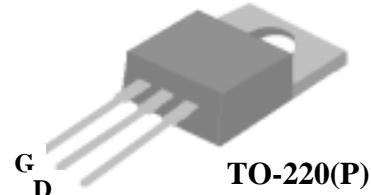

Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The TO-263 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters. The through-hole version (AP60N03GP) is available for low-profile applications.

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$	55	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$	35	A
I_{DM}	Pulsed Drain Current ¹	215	A
$P_D @ T_C = 25^\circ C$	Total Power Dissipation	62.5	W
	Linear Derating Factor	0.5	W/°C
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Value	Units
R_{thj-c}	Thermal Resistance Junction-case	Max. 2.0	°C/W
R_{thj-a}	Thermal Resistance Junction-ambient	Max. 62	°C/W



Electrical Characteristics @ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_D=250\mu\text{A}$	30	-	-	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	-	0.037	-	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}, I_D=28\text{A}$	-	11.5	13.5	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_D=22\text{A}$	-	18	20	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_D=250\mu\text{A}$	1	-	3	V
g_{fs}	Forward Transconductance	$V_{\text{DS}}=10\text{V}, I_D=28\text{A}$	-	30	-	S
I_{DSS}	Drain-Source Leakage Current ($T_j=25^\circ\text{C}$)	$V_{\text{DS}}=30\text{V}, V_{\text{GS}}=0\text{V}$	-	-	1	μA
	Drain-Source Leakage Current ($T_j=150^\circ\text{C}$)	$V_{\text{DS}}=24\text{V}, V_{\text{GS}}=0\text{V}$	-	-	25	μA
I_{GSS}	Gate-Source Forward Leakage	$V_{\text{GS}}=\pm 20\text{V}$	-	-	± 100	nA
Q_g	Total Gate Charge ²	$I_D=28\text{A}$	-	22.4	-	nC
Q_{gs}	Gate-Source Charge	$V_{\text{DS}}=24\text{V}$	-	2.7	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=5\text{V}$	-	14	-	nC
$t_{\text{d}(\text{on})}$	Turn-on Delay Time ²	$V_{\text{DS}}=15\text{V}$	-	7.4	-	ns
t_r	Rise Time	$I_D=28\text{A}$	-	81	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_G=3.3\Omega, V_{\text{GS}}=10\text{V}$	-	24	-	ns
t_f	Fall Time	$R_D=0.53\Omega$	-	18	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	950	-	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=25\text{V}$	-	440	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	145	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
I_s	Continuous Source Current (Body Diode)	$V_D=V_G=0\text{V}, V_S=1.3\text{V}$	-	-	55	A
I_{SM}	Pulsed Source Current (Body Diode) ¹		-	-	215	A
V_{SD}	Forward On Voltage ²	$T_j=25^\circ\text{C}, I_s=55\text{A}, V_{\text{GS}}=0\text{V}$	-	-	1.3	V

Notes:

1. Pulse width limited by safe operating area.
2. Pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.

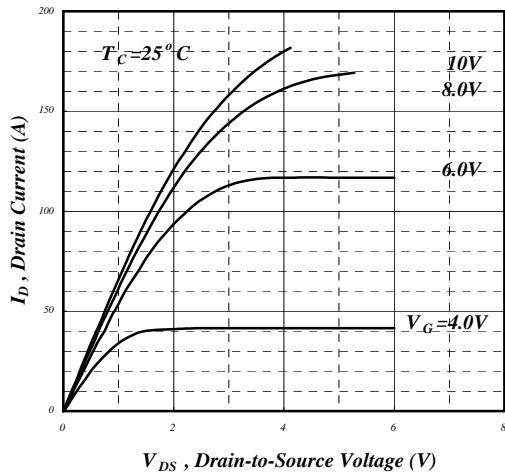


Fig 1. Typical Output Characteristics

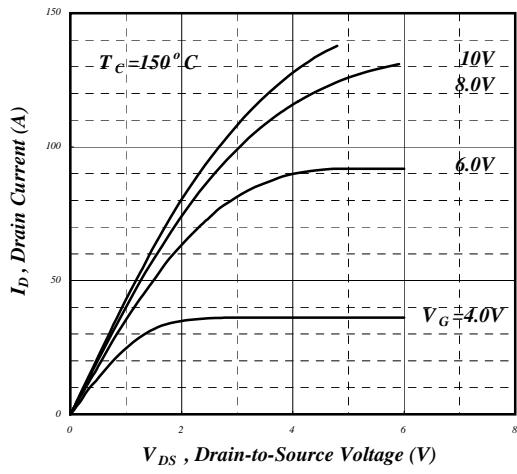


Fig 2. Typical Output Characteristics

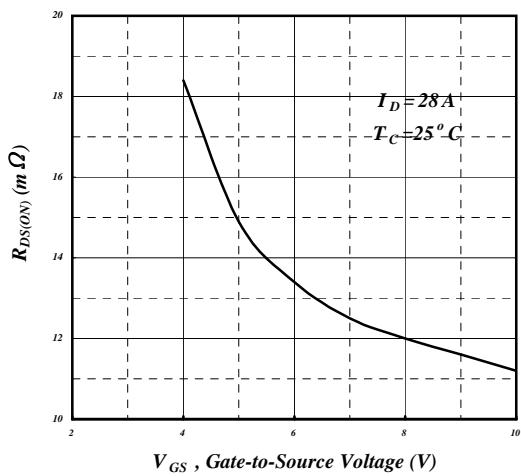


Fig 3. On-Resistance v.s. Gate Voltage

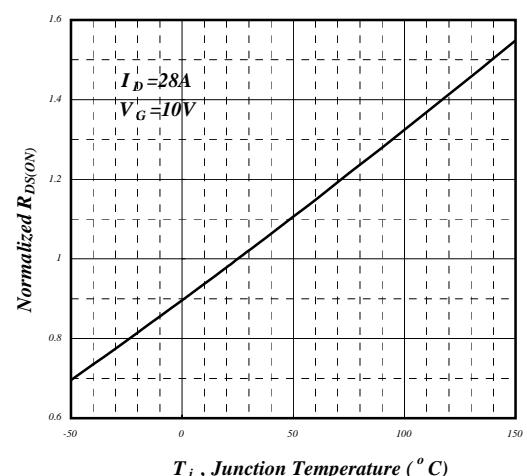


Fig 4. Normalized On-Resistance

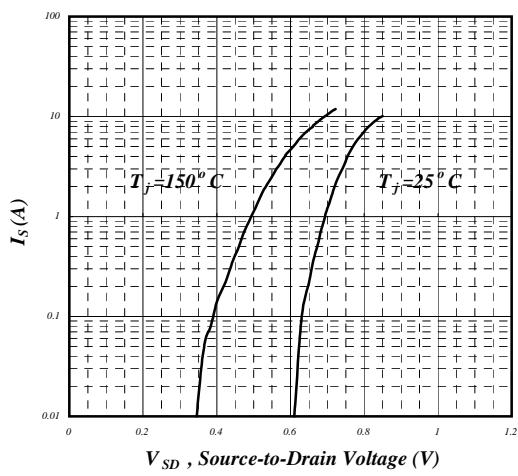


Fig 5. Forward Characteristic of Reverse Diode

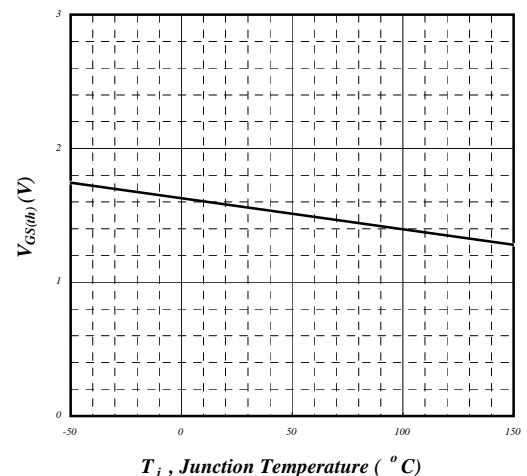


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

AP60N03GS/P

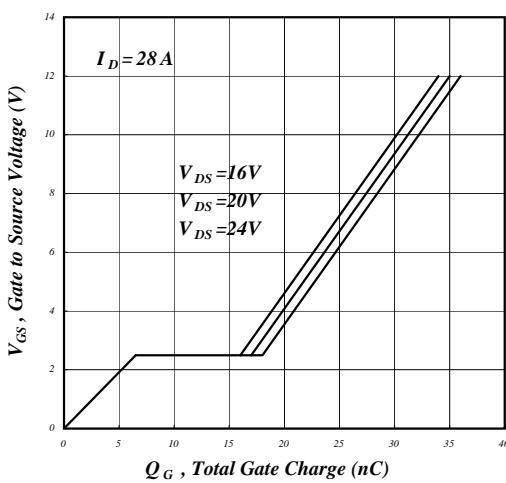


Fig 7. Gate Charge Characteristics

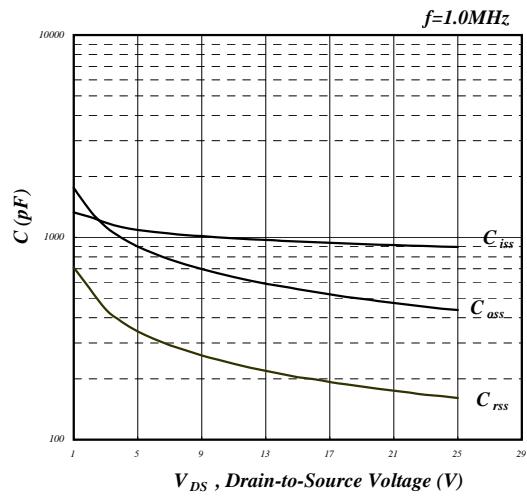


Fig 8. Typical Capacitance Characteristics

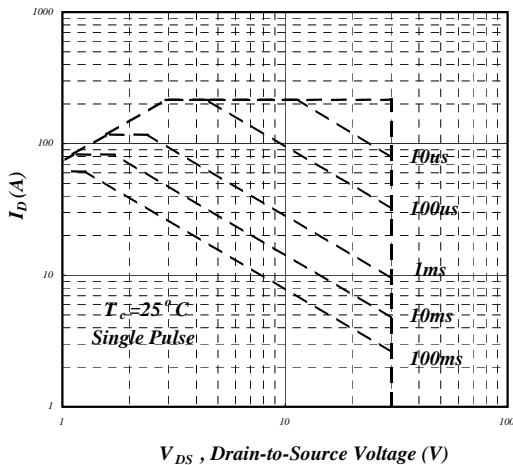


Fig 9. Maximum Safe Operating Area

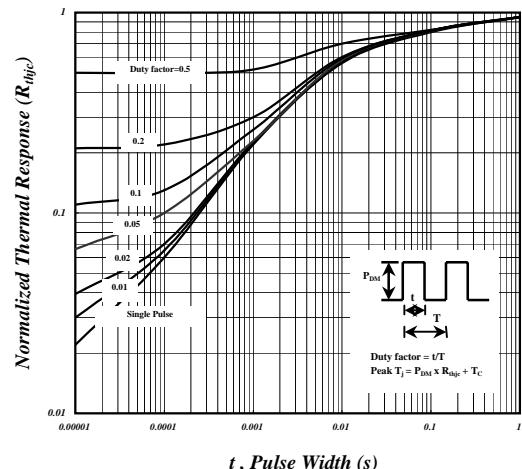


Fig 10. Effective Transient Thermal Impedance

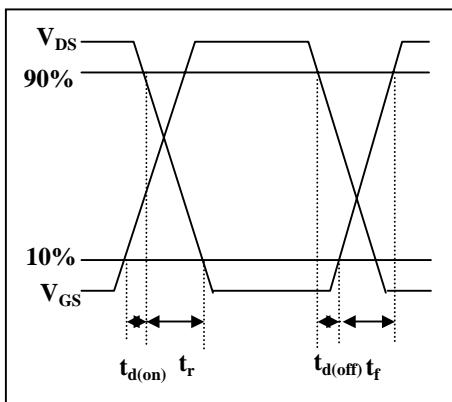


Fig 11. Switching Time Waveform

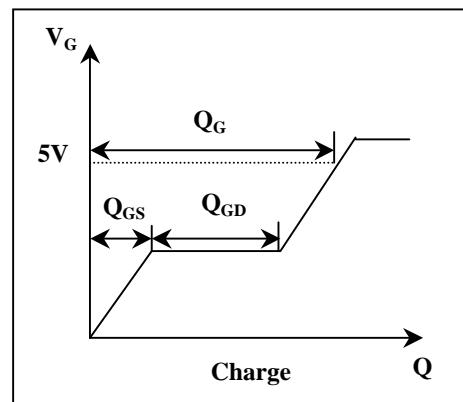


Fig 12. Gate Charge Waveform