

## SOT-23 Encapsulate Adjustable Reference Source


CJ431K Adjustable Accurate Reference Source

### DEVICE DESCRIPTION

The CJ431K is a three-terminal adjustable shunt regulator offering excellent temperature stability. This device has a typical dynamic output impedance of  $0.2\Omega$ . The device can be used as a replacement for zener diodes in many applications.

### FEATURES

- The output voltage can be adjusted to 36V
- Low dynamic output impedance, its typical value is  $0.2\Omega$
- Trapping current capability is 1 to 100mA
- Low output noise voltage
- Fast on-state response
- The effective temperature compensation in the working range of full temperature
- The typical value of the equivalent temperature factor in the whole temperature scope is  $50 \text{ ppm}/^\circ\text{C}$

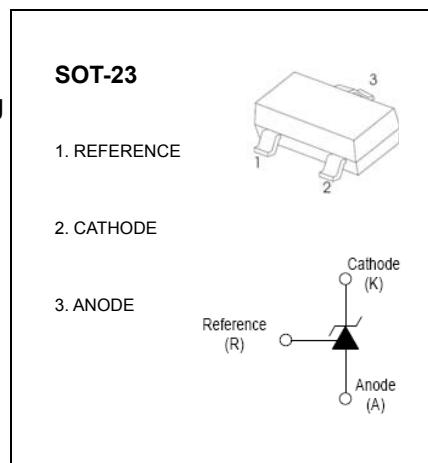

### APPLICATION

- Shunt Regulator
- High-Current Shunt Regulator
- Precision Current Limiter

### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Cathode Voltage	$V_{KA}$	37	V
Cathode Current Range (Continuous)	$I_{KA}$	-100~+150	mA
Reference Input Current Range	$I_{ref}$	0.05~+10	mA
Power Dissipation	$P_D$	300	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C}/\text{W}$
Operating Junction Temperature	$T_j$	150	$^\circ\text{C}$
Operating Ambient Temperature Range	$T_{opr}$	-40~+85	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-65~+150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$  unless otherwise specified)**

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Reference Input Voltage (Fig.1)	$V_{\text{ref}}$	$V_{KA}=V_{\text{REF}}$ , $I_{KA}=10\text{mA}$		2.445		2.545	V
Deviation of Reference Input Voltage Over Temperature (note) (Fig.1)	$\Delta V_{\text{ref}}/\Delta T$	$V_{KA}=V_{\text{REF}}$ , $I_{KA}=10\text{mA}$ $T_{\text{min}} \leq T_a \leq T_{\text{max}}$			4.5	17	mV
Ratio Of Change in Reference Input Voltage to the Change in Cathode Voltage (Fig.2)	$\Delta V_{\text{ref}}/\Delta V_{KA}$	$I_{KA}=10\text{mA}$	$\Delta V_{KA} = 10\text{V} \sim V_{\text{REF}}$		-1.0	-2.7	mV/V
			$\Delta V_{KA} = 36\text{V} \sim 10\text{V}$		-0.5	-2.0	mV/V
Reference Input Current (Fig.2)	$I_{\text{ref}}$	$I_{KA}=10\text{mA}$ , $R_1=10\text{k}\Omega$ $R_2=\infty$			1.5	4	$\mu\text{A}$
Deviation Of Reference Input Current Over Full Temperature Range (Fig.2)	$\Delta I_{\text{ref}}/\Delta T$	$I_{KA}=10\text{mA}$ , $R_1=10\text{k}\Omega$ $R_2=\infty$ $T_a=\text{full Temperature}$			0.4	1.2	$\mu\text{A}$
Minimum Cathode Current for Regulation (Fig.1)	$I_{KA(\text{min})}$	$V_{KA}=V_{\text{REF}}$			0.45	1.0	mA
Off-state Cathode Current (Fig.3)	$I_{KA(\text{OFF})}$	$V_{KA}=40\text{V}$ , $V_{\text{REF}}=0$			0.05	0.5	$\mu\text{A}$
Dynamic Impedance	$Z_{KA}$	$V_{KA}=V_{\text{REF}}$ , $I_{KA}=1 \text{ to } 100\text{mA}$ $f \leq 1.0\text{kHz}$			0.15	0.5	$\Omega$

note:  $T_{\text{MIN}}=0^\circ\text{C}$ ,  $T_{\text{MAX}}=+70^\circ\text{C}$ **CLASSIFICATION cZV<sub>ref</sub>**

Rank	0.5%	1%
Range	2.482-2.508	2.47-2.52