
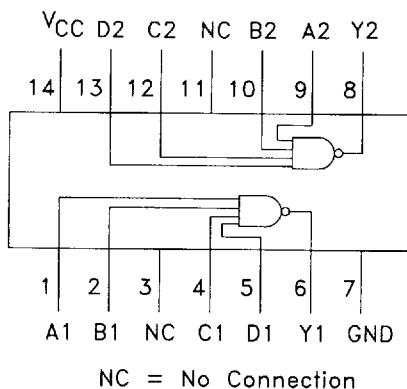


DV74AC20

Dual 4-Input NAND Gate

This device is identical in pinout to the LS20. The device inputs are compatible with standard CMOS outputs; with pullup resistors, they are compatible with LSTTL outputs.

- Advanced very high speed CMOS
- Outputs source/sink 24 mA
- Transmission line driving 50 ohms
- Operation from 2 to 6 volts guaranteed
- DC & AC Parameters guaranteed over -40 to +85°C

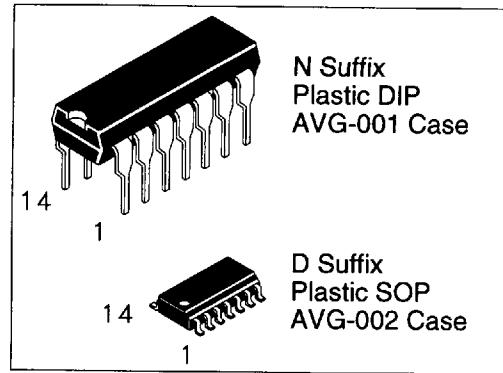

TRUTH TABLE

Inputs				Output
A	B	C	D	Y
L	X	X	X	H
X	L	X	X	H
X	X	L	X	H
X	X	X	L	H
H	H	H	H	L

H=High Logic Level

L=Low Logic Level

X=Don't Care

ABSOLUTE MAXIMUM RATINGS

Maximum ratings are those values beyond which damage to the device may occur.

Symbol	Parameter	AC20	Unit
V _{CC}	DC Supply Voltage (Referenced to GND)	- 0.5 to +7.0	V
V _{IN}	DC Input Voltage (Referenced to GND)	- 0.5 to V _{CC} + 0.5	V
V _{OUT}	DC Output Voltage (Referenced to GND)	- 0.5 to V _{CC} + 0.5	V
I _{IN}	DC Input Current, per Pin	± 20	mA
I _{OUT}	DC Output Sink/Source Current, per Pin	± 50	mA
I _{CC}	DC V _{CC} or GND Current per Output Pin	± 50	mA
T _{stg}	Storage Temperature	- 65 to +150	°C

GUARANTEED OPERATING CONDITIONS

Symbol	Parameter	Min	Typ	Max	Unit	
V _{CC}	Supply Voltage	'AC	2.0	5.0	6.0	V
V _{IN} , V _{OUT}	DC Input Voltage, Output Voltage, (Ref. to GND)	0		V _{CC}	V	
t _r , t _f	Input Rise and Fall Time VIN from 30% to 70% V _{CC}	V _{CC} @ 3.0 V		150	ns/V	
		V _{CC} @ 4.5 V		40	ns/V	
		V _{CC} @ 5.5 V		25	ns/V	
T _A	Operating Ambient Temperature Range	-40		85	°C	
C _{IN}	Input Capacitance	V _{CC} = 5.0 V	4.5		pF	
C _{PD}	Power Dissipation Capacitance	V _{CC} = 5.0 V	30		pF	



DC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Conditions	V _{CC} (V)	AC20		Unit	
				TA = +25°C			
				Typ	Guaranteed Limits		
V _{IH}	Minimum High Level Input Voltage	V _{OUT} = 0.1V or V _{CC} - 0.1 V	3.0 4.5 5.5	1.5 2.25 2.75	2.1 3.15 3.85	V	
V _{IL}	Maximum Low Level Input Voltage	V _{OUT} = 0.1V or V _{CC} - 0.1 V	3.0 4.5 5.5	1.5 2.25 2.75	0.9 1.35 1.65	V	
V _{OH}	Minimum High Level Output Voltage	I _{OUT} = -50 μA	3.0 4.5 5.5	2.99 4.49 5.49	2.9 4.4 5.4	V	
		V _{IN} = V _{IL} or V _{IH} -12mA I _{OH} -24mA -24mA	3.0 4.5 5.5		2.56 3.86 4.86	V	
V _{OL}	Maximum Low Level Output Voltage	I _{OUT} = 50 μA	3.0 4.5 5.5	0.002 0.001 0.001	0.1 0.1 0.1	V	
		V _{IN} = V _{IL} or V _{IH} 12mA I _{OL} 24mA 24mA	3.0 4.5 5.5		0.36 0.36 0.36	V	
I _{IN}	Maximum Input Leakage Current	V _{IN} = V _{CC} or GND	5.5		±0.1	μA	
I _{CC}	Maximum Quiescent Supply Current	V _{IN} = V _{CC} or GND	5.5		4.0	40	

AC CHARACTERISTICS over full operating conditions

Symbol	Parameter	V _{CC} ±10% (V)	AC20				Unit	
			TA = +25°C C _L = 50 pF		TA = -40°C to +85°C C _L = 50 pF			
			Min	Max	Min	Max		
t _{PLH}	Propagation Delay	3.3 5.0	2.0 1.5	8.5 7.0	1.5 1.0	10.0 8.0	ns	
t _{PHL}	Propagation Delay	3.3 5.0	1.5 1.5	7.0 6.0	1.0 1.0	9.0 7.0	ns	

SWITCHING WAVEFORMS

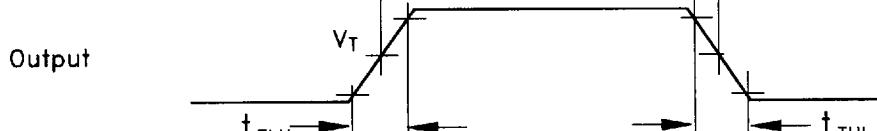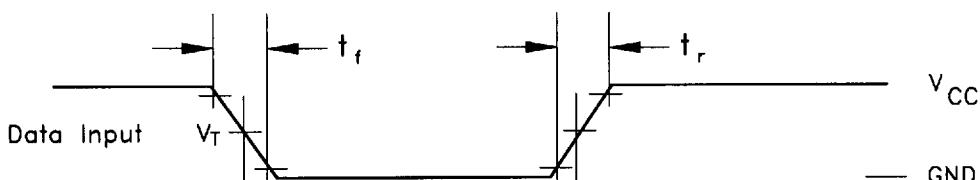

Input and output threshold voltage:
V_T = 50% V_{CC} for AC
V_H = V_{CC} for AC