



LOW FREQUENCY POWER AMP,
MEDIUM SPEED SWITCHING APPLICATIONS

FEATURES

- High breakdown voltage V_{CEO} 120V, high current 1A.
- Low saturation voltage and good linearity of h_{FE} .
- Complementary to KTC2025D/L

MAXIMUM RATING ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	-120	V
Collector-Emitter Voltage		V_{CEO}	-120	V
Emitter-Base Voltage		V_{EBO}	-5	V
Collector Current		I_C	-1	A
		I_{CP}	-2	
Collector Power Dissipation	$T_a=25^\circ\text{C}$	P_C	1.0	W
	$T_c=25^\circ\text{C}$		8	
Junction Temperature		T_j	150	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-55 ~ 150	$^\circ\text{C}$

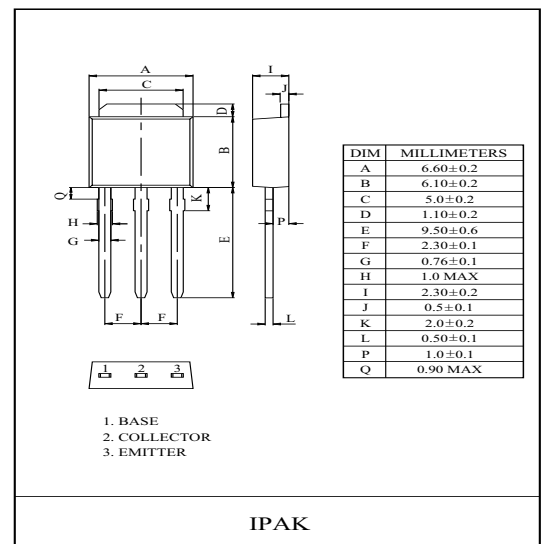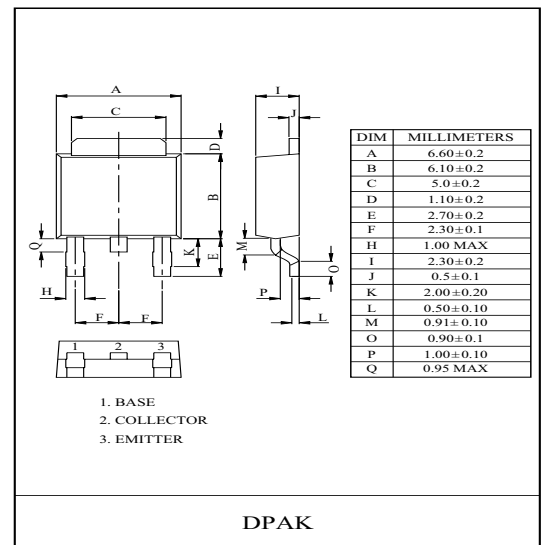

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut of Current		I_{CBO}	$V_{CB}=-50\text{V}, I_E=0$	-	-	-1	μA
Emitter Cut of Current		I_{EBO}	$V_{EB}=-4\text{V}, I_C=0$	-	-	-1	μA
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C=-10\mu\text{A}, I_E=0$	-120	-	-	V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=-1\text{mA}, I_B=0$	-120	-	-	V
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E=-10\mu\text{A}, I_C=0$	-5	-	-	V
DC Current Gain	$h_{FE(1)}$ Note	$V_{CE}=-5\text{V}, I_C=-50\text{mA}$	100	-	320		
	$h_{FE(2)}$	$V_{CE}=-5\text{V}, I_C=-500\text{mA}$	20	-	-		
Gain Bandwidth Product		f_T	$V_{CE}=-10\text{V}, I_C=-50\text{mA}$	-	110	-	MHz
Output Capacitance		C_{ob}	$V_{CB}=-10\text{V}, I_E=0, f=1\text{MHz}$	-	30	-	pF
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=-500\text{mA}, I_B=-50\text{mA}$	-	-0.15	-0.4	V
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=-500\text{mA}, I_B=-50\text{mA}$	-	-0.85	-1.2	V
Switching Time	Turn-on Time	t_{on}	<p>$V_{CE}=-12\text{V}$ $I_C=10\text{I}_{B1}=-10\text{I}_{B2}=500\text{mA}$</p>	-	80	-	nS
	Turn-off Time	t_{off}		-	100	-	
	Storage Time	t_{stg}		-	600	-	

(Note): $h_{FE(1)}$ Classification Y:100 ~ 200, GR:160 ~ 320

KTA1045D/L

