



0.5 Watts Low Power WR-42 Waveguide Load 18 GHz to 26.5 GHz

Waveguide Terminations Technical Data Sheet

PE6802

Features

- WR-42
- 18 to 26.5 GHz
- 1.25:1 Maximum VSWR
- 0.5 Watt Average Power Handling (CW)

Applications

- Instrumentation
- Precision Measurements
- Prototyping and Characterization
- Production Systems

Description

Pasternack's PE6802 is part of our line of waveguide terminations (or waveguide loads) which are in stock and available to ship same-day. Waveguide loads are designed to absorb virtually all applied power, ensuring a low VSWR. Our PE6802 offers excellent VSWR of 1.25:1 maximum. This WR-42 waveguide termination uses a UG-597/U square cover flange and offers CW power handling of up to 0.5 Watts.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	18		26.5	GHz
VSWR			1.25:1	
Input Power (CW)			0.5	Watts

Mechanical Specifications

Size

Length	0.69 in [17.53 mm]
Width/Dia.	0.88 in [22.35 mm]
Height	0.88 in [22.35 mm]
Weight	0.024 lbs [10.89 g]

Description	Flange	Waveguide
Designation	UG-597/U	WR-42
Type	Square Cover	
Material		Aluminum

Environmental Specifications

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 Watts Low Power WR-42 Waveguide Load 18 GHz to 26.5 GHz PE6802](#)



0.5 Watts Low Power WR-42 Waveguide
Load 18 GHz to 26.5 GHz

Waveguide Terminations Technical Data Sheet

PE6802

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

0.5 Watts Low Power WR-42 Waveguide Load 18 GHz to 26.5 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0.5 Watts Low Power WR-42 Waveguide Load 18 GHz to 26.5 GHz PE6802](#)

URL: <https://www.pasternack.com/waveguide-termination-frequency-range-1800-2650-ghz-pe6802-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6802 CAD Drawing

0.5 Watts Low Power WR-42 Waveguide Load 18 GHz to 26.5 GHz

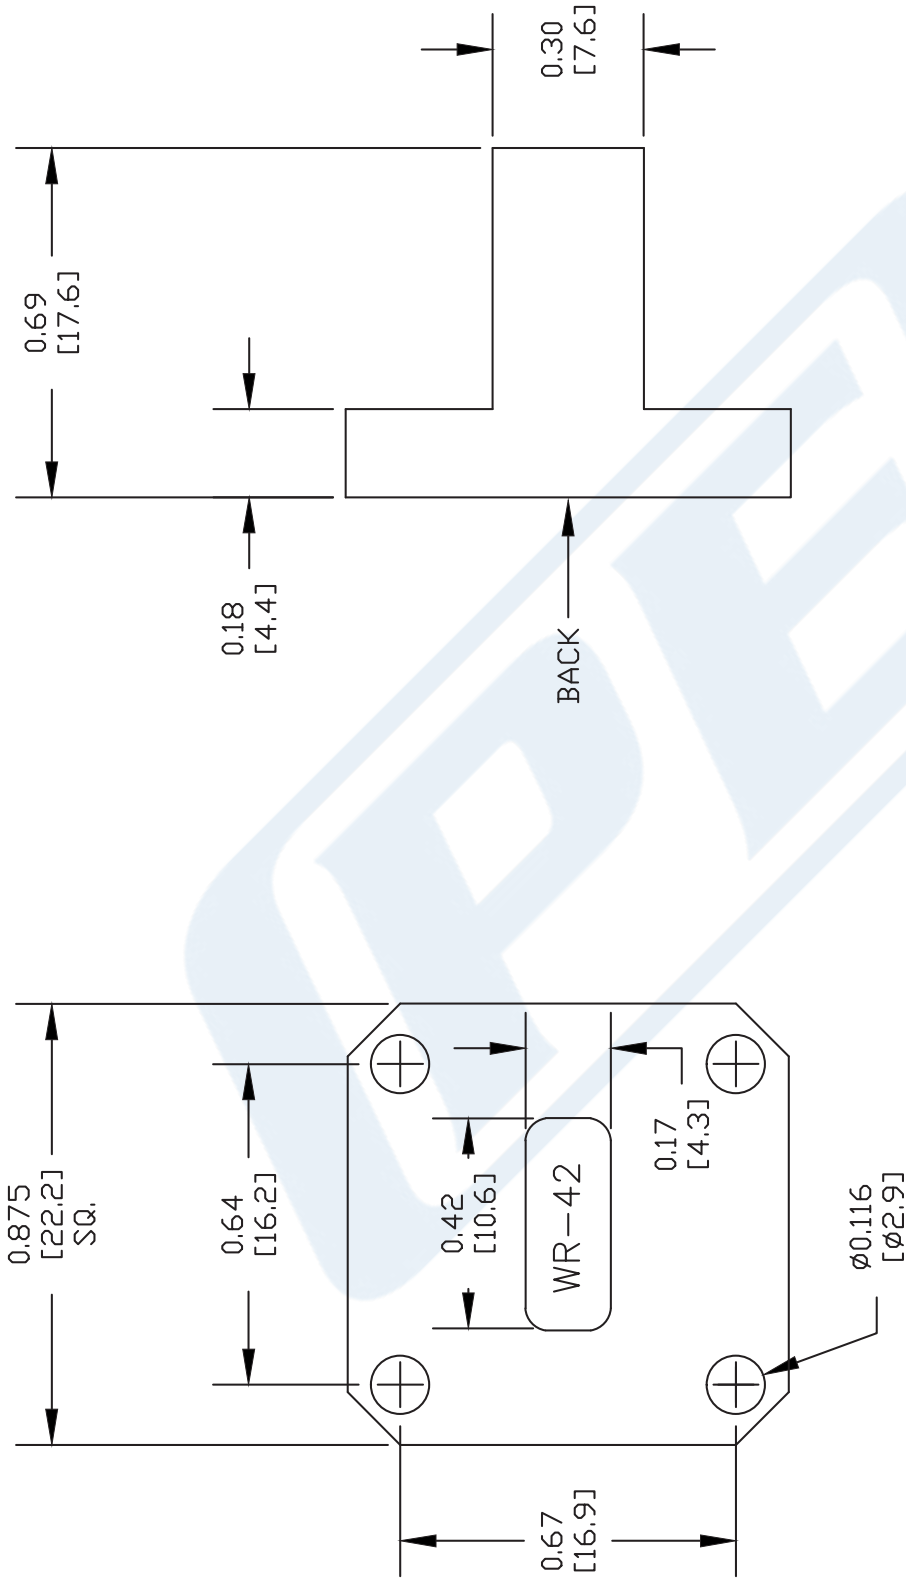

BACK VIEW

DWG TITLE

PE6802

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 100110-A

SCALE N/A

SIZE A

XXXX



Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com