

GYROSTAR®



Piezoelectric Vibrating Gyroscope **ENV Series**

High-precision angular velocity sensor utilizing Murata's unique triangular prism vibrating unit.

This angular velocity sensor employs the principle that the Coriolis force results if an angular velocity is applied to a vibrating object. Murata's unique triangular prism vibrating unit is employed in the sensor element unit, thereby enabling piezoelectric ceramics for both excitation and detection to be used together. The employment of this unit simplifies equipment structure and circuit configuration, thus making it possible to maintain outstanding performance characteristics. This sensor can be used for positional control and posture control of a moving object requiring high-precision measurements.

■FEATURES

1. Compact and lightweight.
2. High precision with high S/N ratio.
3. High sensitivity and good linearity.

■APPLICATIONS

1. Direction detection in vehicle navigation systems.
2. Controlling the direction of antenna facing satellite for moving objects.
3. Detecting the movement of other objects for which high precision is required.

■DESCRIPTION


ENV-05D-52

■RATINGS

Supply voltage	+5	VDC
Current consumption	17	mA max.
Maximum angular velocity (Detection range)	± 80 (at 25°C Output=2.5V angular velocity=0)	%S
Output (at angular velocity=0)	2.5±0.3	VDC
Scale factor (Sensitivity)	22.2±1.8 (at temperature range -10 to +60°C) 22.2±2.9 (at temperature range -30 to +80°C)	mV/ %S
Resolution (DEG/SEC)	0.1	%S
Linearity	±0.5	%FS
Offset drift	9	%S max.
Bandwidth (Response)	7	Hz
Noise level	20	mVrms. max.
Operating temperature range	-30 to +80	°C
Storage temperature range	-40 to +85	°C
Weight (g max.)	50	g max.



■EXTERNAL DIMENSIONS

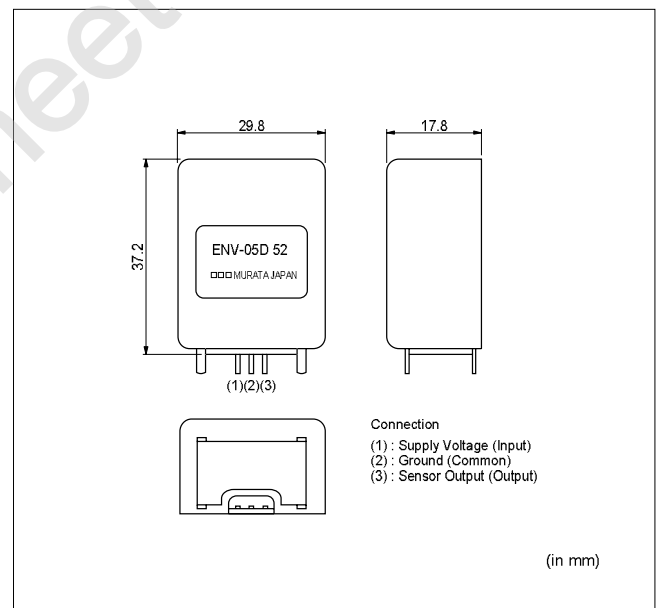

■TERMINAL DESCRIPTIONS

Terminals	Descriptions
1	+Supply 【input】
2	Ground (GND) 【common】
3	Sensor output 【output】



GYROSTAR®




Piezoelectric Vibrating Gyroscope ENV Series


■INSTALLATION

1. When installing the sensor, solder four tabs and terminals on PCB (t=1.6mm). Observe the following rules. If not, characteristics might vary due to soldering heat. Tabs can be bent only once.
2. Install the sensor vertically with respect to the rotating surface. (90±5°)
3. Install the sensor in a location free from vibration.
4. Install the sensor in a place with no substantial variations in temperature.

Soldering iron	Flow soldering
Terminal: 350±5°C, 5s or less.	Soldering : 250±5°C, 5s or less.
Tab : 350±5°C, 10s or less.	Preheating : 105±10°C, 2min. or less.

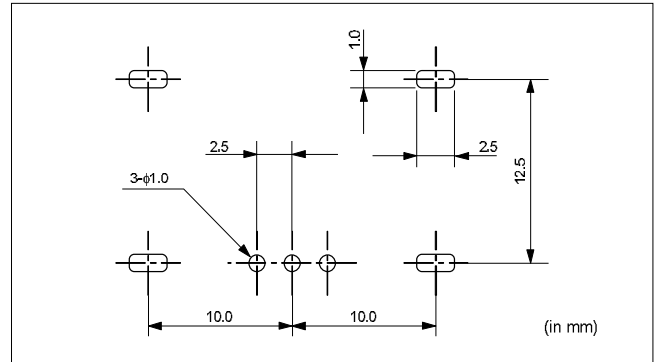

■APPLICATION

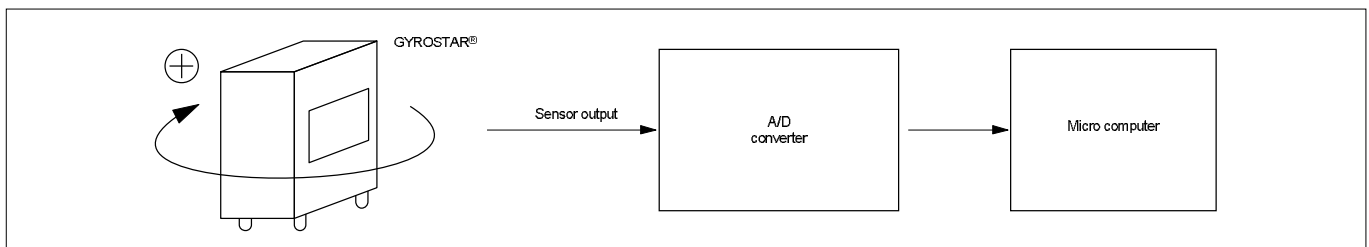

1. When high-precision measurement is required, as in a navigation system, use the output of this sensor through an A/D converter as shown above.
2. Positive voltage (+) and negative voltage (-) are obtained in the clockwise and counterclockwise directions, respectively, with the static output as a reference.
3. An A/D converter of 12 bits or more is recommended. Please choose a proper resolution according to the application.

4. The sampling frequency is recommended to be 50 time/sec minimum. Please choose a proper sampling frequency according to the application.
5. Use a sensor output load resistance of 22kΩ or more.

■NOTICE

1. Incorrect handling may affect sensor characteristics. Please note the following precautions;
 - (1) Do not subject the sensor to shock that exceeds the rated limit.
 - (2) Do not subject the sensor to a magnetic field exceeding 50 gauss.
 - (3) Do not install the sensor in a location in which condensation is likely to form on it.
 - (4) Do not wash the sensor.

2. Precision electronic parts, such as ICs and regulators, are used for the sensor; therefore, it is necessary to take anti-static measures when handling.



GYROSTAR®



Piezoelectric Vibrating Gyroscope ENV Series



Note:

1. Export Control
 (For customers outside Japan)
 Murata products should not be used or sold for use in the development, production, stockpiling or utilization of any conventional weapons or mass-destructive weapons (nuclear weapons, chemical or biological weapons, or missiles), or any other weapons.
 (For customers in Japan)
 For products which are controlled items subject to "the Foreign Exchange and Foreign Trade Control Law" of Japan, the export license specified by the law is required for export.
2. Please contact our sales representatives or engineers before using our products listed in this catalog for the applications requiring especially high reliability what defects might directly cause damage to other party's life, body or property (listed below) or for other applications not specified in this catalog.
 - ① Aircraft equipment
 - ② Aerospace equipment
 - ③ Undersea equipment
 - ④ Medical equipment
 - ⑤ Transportation equipment (automobiles, trains, ships, etc.)
 - ⑥ Traffic signal equipment
 - ⑦ Disaster prevention / crime prevention equipment
 - ⑧ Data-processing equipment
 - ⑨ Applications of similar complexity or with reliability requirements comparable to the applications listed in the above
3. Product specifications in this catalog are as of September 1998, and are subject to change or stop the supply without notice. Please confirm the specifications before ordering any product. If there are any questions, please contact our sales representatives or engineers.
4. The categories and specifications listed in this catalog are for information only. Please confirm detailed specifications by checking the product specification document or requesting for the approval sheet for product specification, before ordering.
5. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or third party's intellectual property rights and other related rights in consideration of your using our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.
6. None of ozone depleting substances (ODS) under the Montreal Protocol is used in manufacturing process of us.

***Murata* Murata Manufacturing Co., Ltd.**

<http://www.murata.co.jp/products/>

Head Office
 2-26-10, Tenjin Nagaokakyo-shi, Kyoto 617-8555, Japan Phone:81-75-951-9111

International Division
 1-18-1 Hakusan, Midori-ku, Yokohama-shi, Kanagawa 226-0006, Japan
 Phone:81-45-931-7111 Fax:81-45-931-7105 E-mail:intl@murata.co.jp