

**SANYO****SANYO Semiconductors****DATA SHEET**

# LA2787 — Monolithic Linear IC

## Dolby Pro Logic Surround Decoder

### Overview

The LA2787 is a Dolby Pro Logic Surround decoder.

### Functions

- High-performance matrix.
- Wide dynamic range.
- Low distortion factor.
- Full bypass mode.
- Digital auto balance.
- Digital noise sequencer.
- Center trim external input.
- L+R+C mix output.

### Specifications

**Maximum Ratings** at  $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum power supply voltage	$V_{CC\text{ max}}$		12	V
Allowable power dissipation	$P_d\text{ max}$	$T_a \leq 70^\circ\text{C}$	900	mW
Operating ambient temperature	$T_{opr}$		-20 to +70	$^\circ\text{C}$
Storage ambient temperature	$T_{stg}$		-40 to +150	$^\circ\text{C}$

**Operating Conditions** at  $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	$V_{CC}$		9	V
Allowable operating voltage range	$V_{CC\text{ range}}$	When Dolby Pro Logic surround is ON	8.5 to 10	V
Dolby level	$V_O\text{ Dolby}$		300	mVrms
Input "H" level voltage	$V_{IH}$		3.5 to 5.5	V
Input "L" level voltage	$V_{IL}$		0 to 1.0	V

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

# LA2787

**Electrical Characteristics** at  $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 9\text{V}$ ,  $V_I = 1\text{kHz}$


L, Lt = 300mV R, Rt = 300mV C, S, Lt = Rt = 300mV\*0.707 S Lt, Rt Unless reverse phase is specified, it is Pro Logic ON mode (wide mode)

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current dissipation	$I_{CCO}$	No signal		65	85	mA
Cch output level	VCO		-2	0	+2	dB
Output level variation	VAC	Cch output reference	-0.5	0	+0.5	dB
Lch matrix rejection	RjL	Lch input	25	40		dB
Cch matrix rejection	RjC	Cch input	25	40		dB
Rch matrix rejection	RjR	Rch input	25	40		dB
Sch matrix rejection	RjS	Sch input	25	40		dB
Lch distortion factor	THDL	Lch output		0.03	0.09	%
Cch distortion factor	THDC	Cch output		0.03	0.09	%
Rch distortion factor	THDR	Rch output		0.03	0.09	%
Sch distortion factor	THDS	Sch output		0.03	0.09	%
Lch S/N	S/N, L	CCIR/ARM, $R_g = 10\text{k}\Omega$	70	79		dB
Cch S/N	S/N, C	CCIR/ARM, $R_g = 10\text{k}\Omega$	70	80		dB
Rch S/N	S/N, R	CCIR/ARM, $R_g = 10\text{k}\Omega$	70	79		dB
Sch S/N	S/N, S	CCIR/ARM, $R_g = 10\text{k}\Omega$	67	77		dB
Lch signal handling	SH, L	$V_{CC} = 8.5\text{V}$ , THD = 1%	15	16		dB
Cch signal handling	SH, C	$V_{CC} = 8.5\text{V}$ , THD = 1%	15	19		dB
Rch signal handling	SH, R	$V_{CC} = 8.5\text{V}$ , THD = 1%	15	16		dB
Sch signal handling	SH, S	$V_{CC} = 8.5\text{V}$ , THD = 1%	15	18		dB
Noise sequencer output level	Vns	Each channel output	50	70	90	mV
Lch/Rch distortion factor when Pro Logic is OFF	THD off	20 to 20kHz B.P.F		0.01	0.03	%
Lch/Rch S/N when Pro Logic is OFF	S/N off	CCIR/ARM, $R_g = 10\text{k}\Omega$	75	92		dB
When C trim is -15dB	CTRIM1	When setting -15dB	-16	-15	-14	dB
When C trim is -31dB	CTRIM2	When setting -31dB	-32	-31	-30	dB

## Package Dimensions

unit : mm

3149A

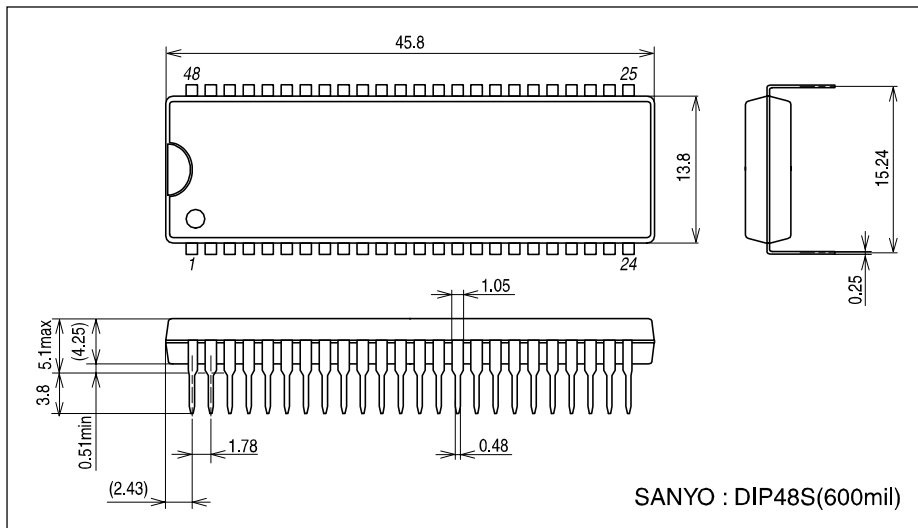

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 2004. Specifications and information herein are subject to change without notice.