

140 COMMERCE DRIVE MONTGOMERYVILLE, PA 18936-1013


PHONE: (215) 631-9840 FAX: (215) 631-9855

MRF607

RF & MICROWAVE DISCRETE LOW POWER TRANSISTORS

Features

- 12.5V Silicon NPN, TO-39 packaged VHF & UHF Transistor
- 1.75 Watt Minimum Power Output @ 12.5V, 175 MHz
- 11.5 minimum Gain @ 12.5V, 175 MHz
- 50% Efficiency @ 12.5V, 175 MHz



DESCRIPTION:

The MRF607 is a silicon NPN transistor, designed for VHF and UHF equipment. Applications include amplifier, pre-driver, driver, and output stages.

ABSOLUTE MAXIMUM RATINGS (Tcase = 25°C)

Symbol	Parameter	Value	Unit
V_{CEO}	Collector-Emitter Voltage	16	Vdc
V _{CBO}	Collector-Base Voltage	36	Vdc
V _{EBO}	Emitter-Base Voltage	4.0	Vdc
Ic	Collector Current	330	mA

Thermal Data

mormar bata			
P	Total Device Dissipation @ T _A = 25°C	3.5	Watts
D	Derate above 25°C	28	mW/ °C



MRF607

ELECTRICAL SPECIFICATIONS (Tcase = 25°C)

STATIC

(off)

0	Test Conditions		Value		
Symbol		Min.	Тур.	Max.	Unit
BVCES	Collector-Emitter Breakdown Voltage (IC = 25 mAdc, VBE = 0 Vdc)	36	-	-	Vdc
BVCEO	Collector-Emitter Sustaining Voltage (IC=25 mAdc, IB=0)	16	-	-	Vdc
BVEBO	Emitter-Base Breakdown Voltage (IE = .5 mA, IC = 0)	4.0	-	-	Vdc
ICEO	Collector Cutoff Current (VCE = 10 Vdc, IB = 0)	-	-	.3	mA
n)	•	•	•	•	
HFE	DC Current Gain (IC = 50 mAdc, VCE = 5.0 Vdc)	20	-	150	-

DYNAMIC

Symbol		Test Conditions	Value			Unit
		rest Conditions		Тур.	Max.	Ollit
	COB	Output Capacitance (VCB = 12 Vdc, IE = 0, f = 1.0 MHz)	-	-	15	pF

FUNCTIONAL

Symbol	Test Conditions			Value		
			Min.	Тур.	Max.	Unit
G _{PE}	Power Gain	Test Circuit-Figure 1 Pout = 1.75W, VCE = 12.5Vdc f = 175 MHz	11.5	-	-	dB
ης	Collector Efficiency	Test Circuit-Figure 1 Pout = 1.75W, VCE = 12.5Vdc f = 175 MHz	50	-	-	%





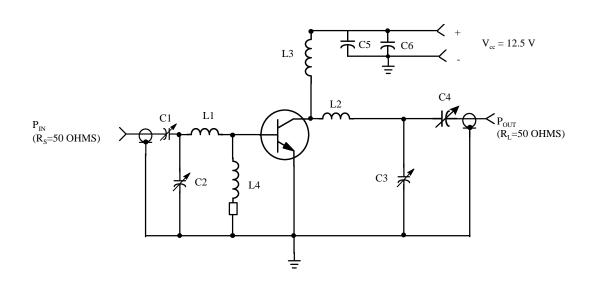


Figure 1 - 175 MHz RF AMPLIFIER CIRCUIT FOR G_{PE}, AND EFFICIENCY SPECIFICATIONS.

C2 C3, C4	2.7-15 pF, ARCO 461 9.0-180 pF, ARCO 463 5.0-80 pF ARCO 462 1000 pF UNELCO 5 uF, 25 Vdc.	L1 L2 L3 L4	1 TURN #20 AWG, 3/8" I.D. 3 TURNS #20 AWG, 3/8" I.D. 0.22 μH MOLDED CHOKE 0.15 μH MOLDED CHOKE WITH TANTALUM FERROXCUBE 56-590-65-3B
C6	5 μF, 25 Vdc,		TANTALUM FERROXCUBE 56-590-65-3B BEAD ON GROUND LEAD

Advanced Power Technology reserves the right to change, without notice, the specifications and information contained herein Visit our website at **WWW.ADVANCEDPOWER.COM** or contact our factory direct.




MRF607



MRF607



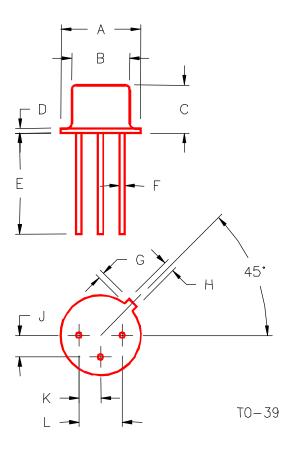

	MINIMUM	MAXIMUM		MINIMUM	MAXIMUM
	INCHES/MM	INCHES/MM		INCHES/MM	INCHES/MM
Α	.350/8,89	.370/9,40	J	.095/2,41	.105/2,67
В	.315/8,00	.335/8,51	K	.095/2,41	.105/2,67
С	.240/6,10	.260/6,60	L	.190/4,83	.210/5,33
D	.015/0,38	.045/1,14			
Ε	.500/	12,70			
F	.016/0,41	.019/0,48			
G	.029/0,74	.040/1,02			
Н	.028/0,71	.034/0,86			