# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

# **Technical Data Sheet**

# **0805** Package White Chip LED

### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.

# Descriptions


- The 17-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

## Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

## **Device Selection Guide**


David Ma	С	Lang Calan	
Part No.	Material	<b>Emitted Color</b>	Lens Color
17-21/W1D-ANPHY/3T	InGaN	Pure White	Yellow Diffused



17-21/W1D-ANPHY/3T



# **Package Outline Dimensions**

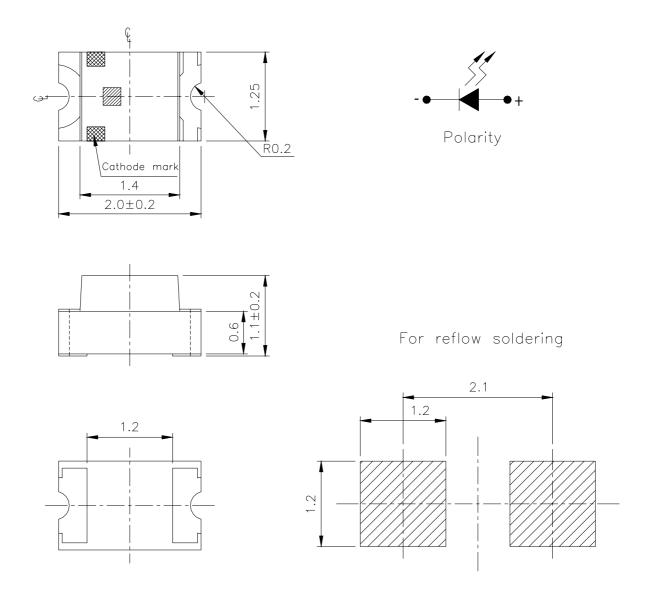

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

http://www.everlight.com Prepared date: 22-Aug-2005 EVERLIGHT ELECTRONICS CO.,LTD.

# 17-21/W1D-ANPHY/3T

#### Absolute Maximum Ratings (Ta=25°C)

EVERLIGHT

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	IF	25	mA	
Operating Temperature	Topr	-40 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +90	°C	
Electrostatic Discharge(HBM)	ESD	150	V	
Power Dissipation	Pd	110	mW	
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	100	mA	
Soldering Temperature	Tsol	Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Hand Soldering : 350 $^{\circ}$ C for 3 sec.		

# Electro-Optical Characteristics (Ta=25°C)

<b>_</b>						
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I <sub>V</sub>	28.5		72.0	mcd	
Viewing Angle	2 <del>0</del> 1/2		150		deg	I <sub>F</sub> =5mA
Forward Voltage	V <sub>F</sub>	2.70		3.15	V	
Reverse Current	I <sub>R</sub>			50	$\mu A$	V <sub>R</sub> =5V

### **Bin Range Of Luminous Intensity & Forward Voltage**

Symbol	Bin Code	Min.	Max.	Unit	Condition	
Iv	Ν	28.5	45.0			
	Р	45.0	72.0	mcd		
V <sub>F</sub>	15	2.70	2.85		I <sub>F</sub> =5mA	
	16	2.85	3.00	V		
	17	3.00	3.15			

#### Notes:

# 1.Tolerance of Luminous Intensity ±10%

#### 2.Tolerance of Forward Voltage ±0.1V

EVERLIGHT ELECTRONICS CO., LTD.

# 17-21/W1D-ANPHY/3T

### **Chromaticity Coordinates Specifications for Bin Grading**

**ÆRLIGHT** 

Groups	Bin Code	CIE_x	CIE_y	Condition
	1	0.274	0.226	
		0.274	0.258	
		0.294	0.286	
		0.294	0.254	
		0.274	0.258	
	2	0.274	0.291	
	2	0.294	0.319	
		0.294	0.286	
		0.294	0.254	
	3	0.294	0.286	
		0.314	0.315	
		0.314	0.282	I <sub>F</sub> =5mA
А	4	0.294	0.286	$I_{\rm F}$ –JIIA
		0.294	0.319	
		0.314	0.347	
		0.314	0.315	
	5	0.314	0.282	
		0.314	0.315	
		0.334	0.343	
		0.334	0.311	
	6	0.314	0.315	
		0.314	0.347	
		0.334	0.376	
		0.334	0.343	


#### Notes:

1.The C.I.E. 1931 chromaticity diagram ( Tolerance ±0.01).

2. The products are sensitive to static electricity and care must be fully taken when handling products.



# **CIE Chromaticity Diagram**

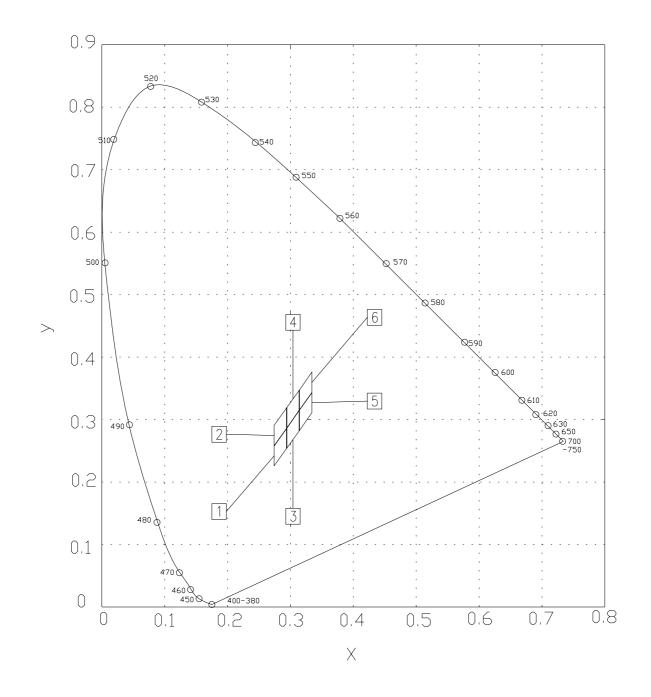


EVERLIGHT ELECTRONICS CO., LTD.

## 17-21/W1D-ANPHY/3T


## **Typical Electro-Optical Characteristics Curves**

**ÆRLIGHT** 

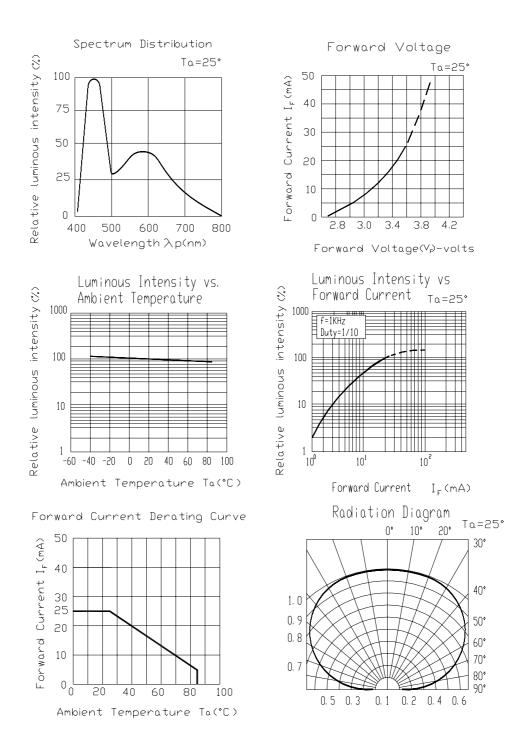


### Label explanation

CAT: Luminous Intensity Rank HUE: Chromaticity Coordinates REF: Forward Voltage Rank

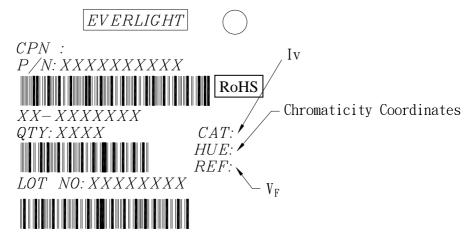

MADE IN TAIWAN

#### **Reel Dimensions**

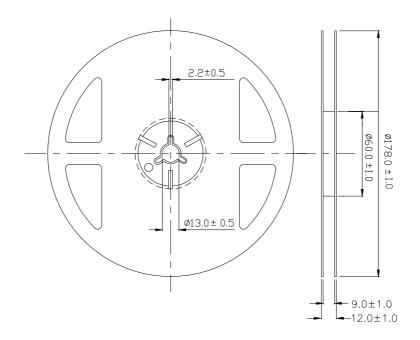


**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

http://www.everlight.com Prepared date: 22-Aug-2005

# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


# 17-21/W1D-ANPHY/3T

## **Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel**

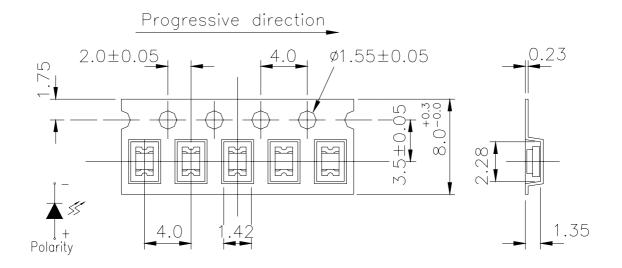

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### **Moisture Resistant Packaging**

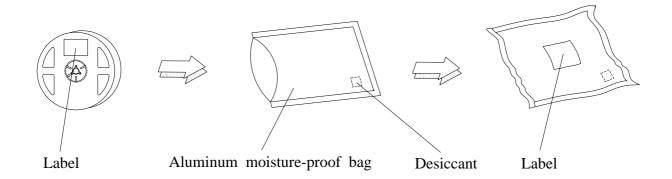

**EVERLIGHT** EVERLIGHT ELECTRONICS CO.,LTD.

# 17-21/W1D-ANPHY/3T

### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min $\int$ 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	<b>Temp.</b> : 100℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 5 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90% RH or less.
  - 2.3 The LEDs should be used within a year.
  - 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 60%RH or less.
  - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
  - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

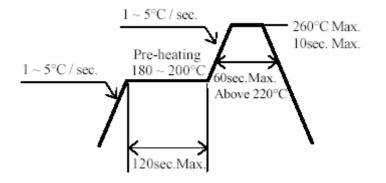


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

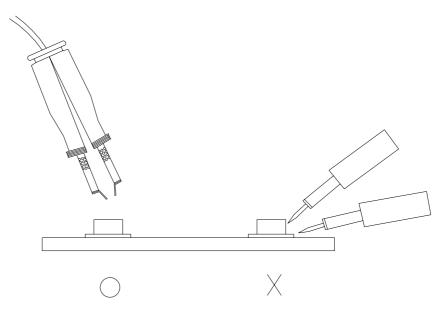

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

http://www.everlight.com Prepared date: 22-Aug-2005