MZ9313 / MZ9313C



Triple-Balanced Mixer

Rev. V3

Features

- LO 2 TO 18 GHz
- RF 2 TO 18 GHz
- IF 0.03 TO 5 GHz
- LO DRIVE: +13 dBm (NOMINAL)
- MINIATURE PACKAGE
- WIDE BANDWIDTH
- AVAILABLE WITH FIELD REPLACEABLE **CONNECTORS**


Description

The MZ9313 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult

Ordering Information

Part Number	Package
MZ9313	Versapac
MZ9313C	SMA Connectorized

Product Image

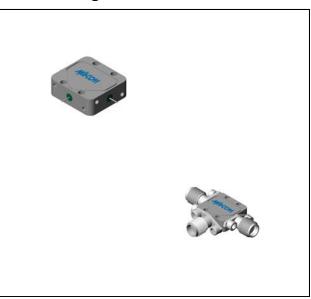

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +13 dBm (Downconverter application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
raiailletei	raiametei Test Conditions			+25°C	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 4 to 18 GHz, fL = 2 to 18 GHz, fI = 0.03 to 3 GHz fR = 2 to 18 GHz, fL = 2 to 18 GHz, fI = 0.03 to 5 GHz	dB dB	6.5 7.5	9.0 10.5	9.5 11.0
Isolation, L to R (min)	fL = 2 to 4 GHz fL = 4 to 18 GHz	dB dB	17 30	12 15	10 13
Isolation, L to I (min)	fL = 2 to 18 GHz	dB	30	17	15
1 dB Conversion Comp.	fL = +13 dBm	dBm	+8		
Input IP3	fR1 = 3 GHz at -10 dBm, fR2 = 3.01 GHz at -10 dBm, fL = 5 GHz at +13 dBm fR1 = 17.99 GHz at -10 dBm, fR2 = 18 GHz at -10 dBm, fL = 14 GHz at +13 dBm	dBm dBm	+19 +15		

Commitment to produce in volume is not guaranteed.

[•] North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

[•] India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.




Triple-Balanced Mixer


Rev. V3

Typical Performance Curves


Conversion vs. LO Power

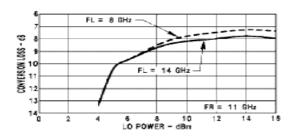



Conversion vs. Frequency

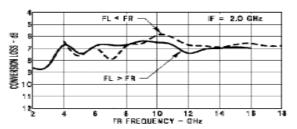


Conversion vs. Frequency

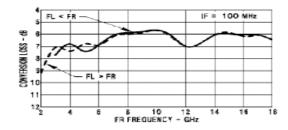

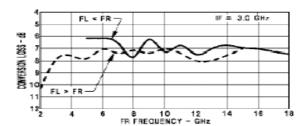


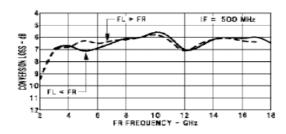

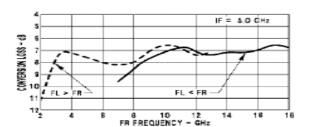

IF = 1.0 GHz CONVERSION LOSS - dB

L-Port VSWR vs. Frequency

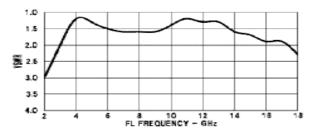

Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588

MZ9313 / MZ9313C





Triple-Balanced Mixer

Rev. V3


Absolute Maximum Ratings

Parameter	Absolute Maximum		
Operating Temperature	-54°C to +100°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+26 dBm max @ +25°C +23 dBm max @ +100°C		
Peak Input Current	mA DC		

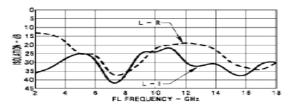

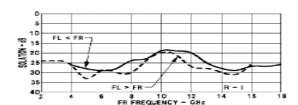


R-Port VSWR vs. Frequency

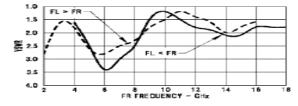


I-Port VSWR vs. Frequency

Commitment to produce in volume is not guaranteed.

3

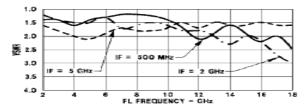


Outline Drawing: Versapac

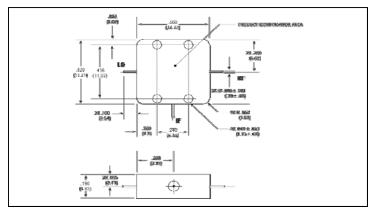

Weight: 4 grams (0.14 oz.) max

Outline Drawing: SMA Connectorized *

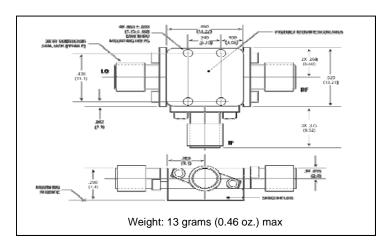

Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588