EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

1206 Package Chip LED (1.1 mm Height)

15-21/S2C-AQ2R2B/2T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.

Descriptions

- The 15-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.




Device Selection Guide


PART No.		Chip	I Cala	
	Material	Emitted Color	Lens Color	
15-21/S2C-AQ2R2B/2T	AlGaInP	Brilliant Orange	Water Clear	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 1 of 10


Package Outline Dimensions








For reflow soldering (propose)





Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No: SZDSE-151-S05

http://www.everlight.com

Prepared date: 13-Apr-2005

Rev 1

Page: 2 of 10

Prepared by: Xiao wei Wu



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	IF	25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!$	
Electrostatic Discharge	ESD	2000	V	
Power Dissipation	Pd	60	mW	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

process operation		(1			
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	I_V	90.0		180	mcd		
Viewing Angle	2 0 1/2		140		deg		
Peak Wavelength	λр		611		nm		
Dominant Wavelength	λd	600.5		612.5	nm	I _F =20mA	
Spectrum Radiation Bandwidth	Δλ		17		nm		
Forward Voltage	V_{F}	1.75		2.35	V		
XC Reverse Current	I_R			10	μΑ	V _R =5V	

Notes:

- 1. Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 10



Bin Range Of Dom. Wavelength

	Group	Bin	Min	Max	Unit	Condition
	A	D8	600.5	603.5		I _F =20mA
		D9	603.5	606.5		
		D10	606.5	609.5	nm	
		D11	609.5	612.5		

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
Q2	90.0	112		
R1	112	140	mcd	I _F =20mA
R2	140	180		

Bin Range Of Luminous Voltage

Group	Bin	Min	Max	Unit	Condition
	0	1.75	1.95		
В	1	1.95	2.15	V	$I_F = 20 \text{mA}$
	2	2.15	2.35		

Notes:


1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 4 of 10

Electro-Optical Characteristics (Ta=25°C)

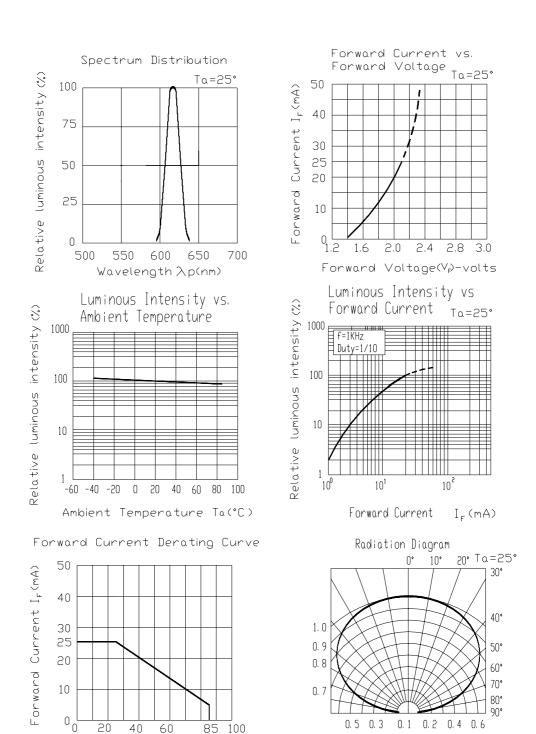

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 5 of 10

Device No: SZDSE-151-S05 Prepared date: 13-Apr-2005 Prepared by: Xiao wei Wu

Ambient Temperature Ta(°C)

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank




Reel Dimensions

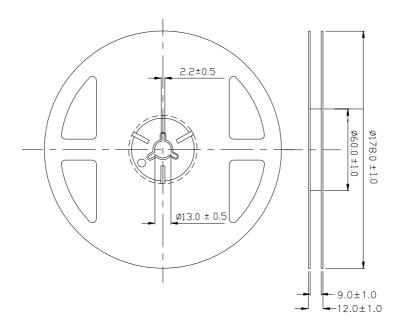

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 6 of 10

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

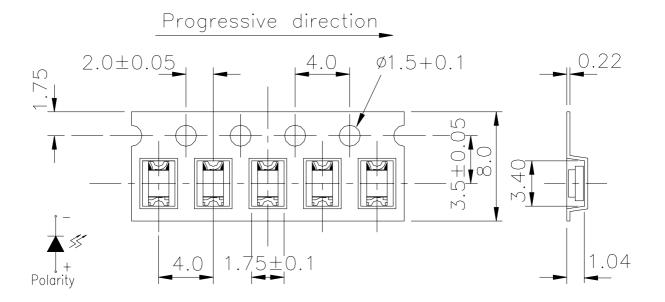

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

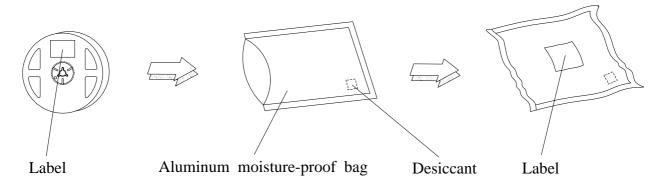

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 7 of 10



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min.5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 8 of 10

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less(Floor life). However,it's recommended that The LEDs should be used within 168 hours (7 days) after opening the package. If unused LED remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

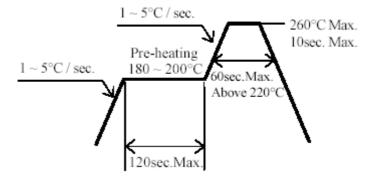

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 9 of 10




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

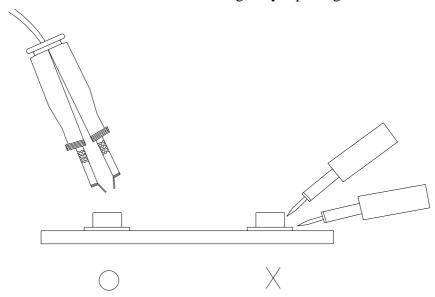

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 10 of 10