

Monolithic crystal filter

MQF10.7-0600/07



Application

- 6 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

Limiting values

		Unit	Value
Center frequency	f_0	MHz	10.7
Insertion loss		dB	≤ 5.0
Pass band at 3.0 dB		kHz	± 3.0
Ripple in pass band	$f_0 \pm 1.8$ kHz	dB	≤ 1.0
Stop band attenuation	$f_0 \pm 10$ kHz	dB	≥ 60
	$f_0 \pm 17$ kHz	dB	> 90
Alternate attenuation	$f_0 \pm 17 \dots 500$ kHz	dB	> 90 except spurious


Terminating impedance Z

R1 C1	Ohm/pF	910 25
R2 C2	Ohm/pF	910 25


Operating temp. range	$^{\circ}\text{C}$	-20... +70
-----------------------	--------------------	------------

Characteristics MQF10.7-0600/07


Pass band

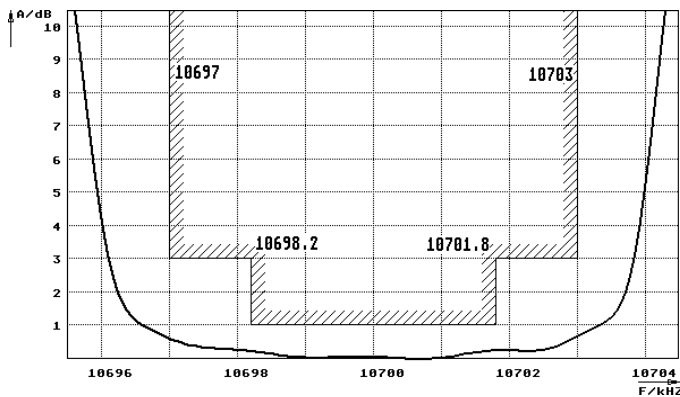

Stop band

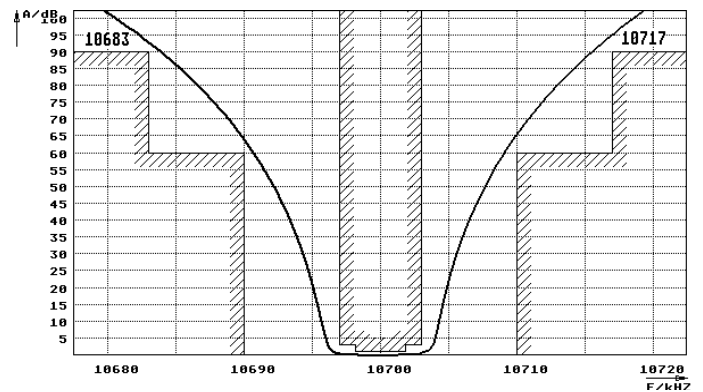

Pin connections: 1 Input
2 Input-E
3 Output
4 Output-E

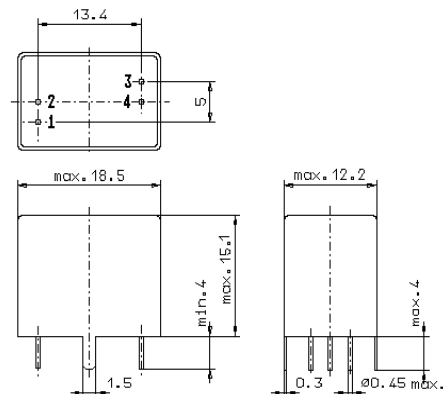

GV5.1