

Product Bulletin



The JDS Uniphase 2500 Series 980 nm pump module is currently deployed in many of today's DWDM systems and CATV distribution systems. This module has proven reliability with Telcordia GR-468-CORE qualification and more than 100 million field deployed hours of operation.

The 2500 Series pump module uses fiber Bragg grating stabilization to “lock” the emission wavelength and provides a noise-free narrow band spectrum even under changes in temperature, drive current and optical feedback.

2500 Series Pumps Up to 170 mW fiber Bragg grating stabilized 980 nm pump modules

Key Features

- High kink-free powers to 170 mW
- Fiber Bragg grating stabilized
- Wavelength selection available
- Superior tracking error and tracking ratio
- Integrated TEC and thermistor

Applications

- DWDM EDFAs
- High bit rate, high channel count EDFAs
- CATV distribution

Compliance

- Telcordia™ GR-468-CORE

Absolute Maximum Ratings

Parameter	Condition	Min	Max	Units
Laser Diode				
Forward Current			500	mA
Forward Current Transient	1μs max		1	A
Reverse Voltage			4.5	V
Reverse Current			20	μA
Monitor Photodiode				
Reverse Current			5E-9	A
Reverse Voltage			20	V
MPD Forward Current			5	mA
Thermistor				
Voltage			5	V
Current			2	mA
Thermoelectric Cooler				
Voltage			4	V
Current			2.5	A
Package				
Storage Temperature		-40	+75	°C
Operating Temperature		-20	+70	°C
Fiber Pigtail				
Fiber Temperature		-40	+85	°C
Tensile Stress			5	N
Bend Radius			12.5	mm

Operating Powers

Product Number	Operating Power	Maximum Operating Current	Maximum Kink-Free Power
	P _{op} (mW)	I _{op} (mA)	P _{max} (mW)
SDLO-2564-80	70	230	80
SDLO-2564-90	80	230	90
SDLO-2564-100	90	230	100
SDLO-2564-110	100	240	110
SDLO-2564-125	115	250	125
SDLO-2564-130	120	270	130
SDLO-2564-135	120	270	135
SDLO-2564-140	125	280	140
SDLO-2564-145	130	290	145
SDLO-2564-150	135	300	150
SDLO-2564-155	140	310	155
SDLO-2564-160	145	320	160
SDLO-2564-165	150	330	165
SDLO-2564-170	150	330	170

Electro-Optical Performance


Parameter	Symbol	Test Condition	Min.	Max.	Units
Spectrum					
Peak Wavelength	λ _c	(see Note 1)	974	986	nm
Power in Band	P _{band}	P _{op} < P _f < P _{max}	90		%
Spectral Shift w/temperature	Δλ/ΔT		-	0.02	nm/°C
Spectrum Stability	Δλ/Δt	25°C, I _{max} , t = 60 seconds		0.1	nm
Optical Power Stability	ΔP _{opt} /Δt	25°C, I _{max} , t = 60 seconds	-	0.5	%
Laser Diode					
Threshold Current	I _{th}	-	-	25	mA
Slope Deviation	ΔL/ΔI	50 mA < I < I _{max}	no negative slope		
Laser diode forward voltage	V _{fwdLD}	I _{max}	-	2.5	volts
Monitor Photodiode					
Current	I _{mpd}		50	-	μA
Thermoelectric Cooler Operation					
TEC voltage	V _{TEC}	ΔT=45°C, I _{max}	-	2.5	volts
TEC current	I _{TEC}	ΔT=45°C, I _{max}	-	1.5	amps
Thermistor resistance	R _{therm}		9.5	10.5	KΩ

Parameter	Specification	Units
Fiber Pigtail Specifications		
Type	SM	-
Mode-field Diameter	6.5 ±1	μm
Cladding Diameter	125 ±2	μm
Jacket Diameter	250	μm

1. Wavelength selection available
2. All specifications are at BOL for an operating temperature range For T_{case} = 0 to 70 °C and back reflection < -50 dB.


Package Dimensions

Dimensions in millimeters except where indicated

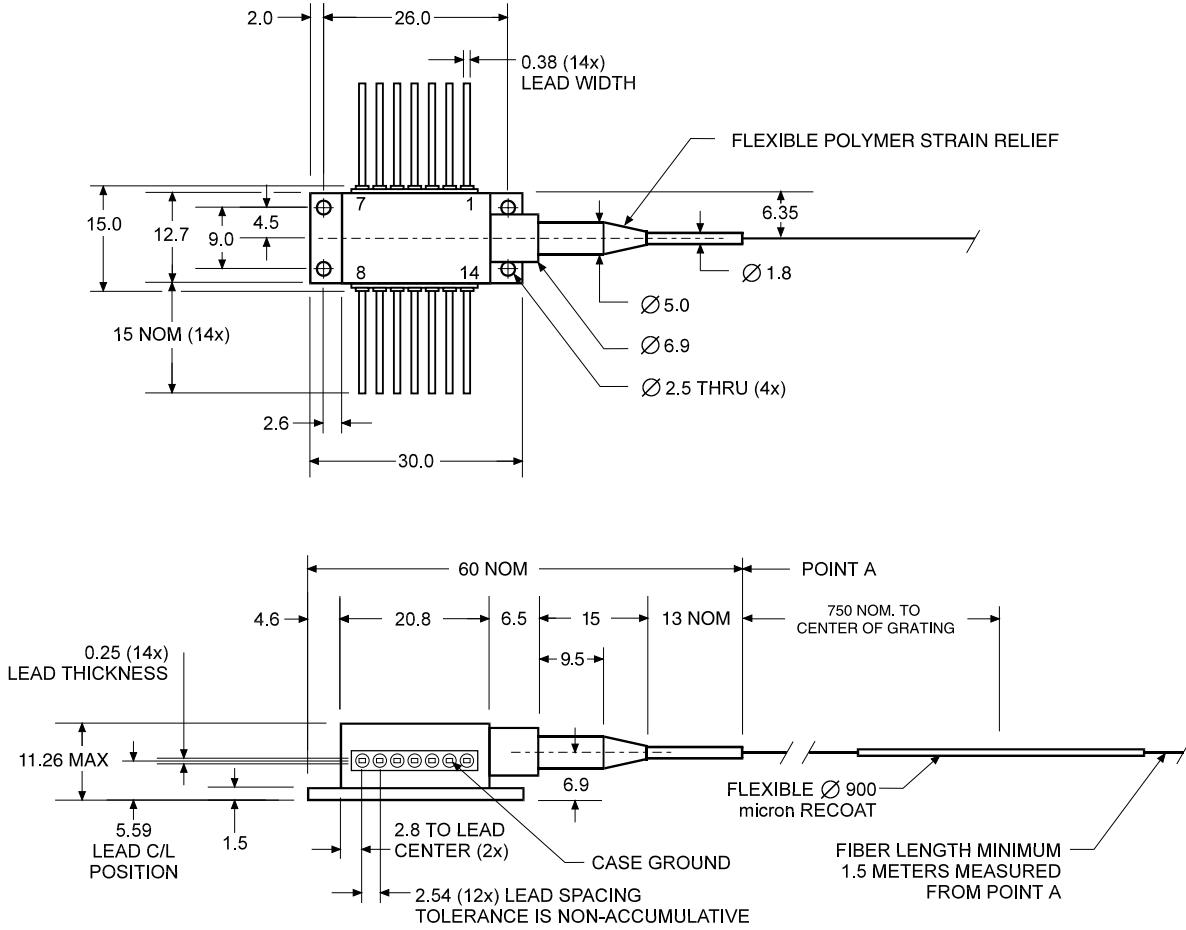

Lead Connection

Electrical Schematic
(Package Viewed From Top)

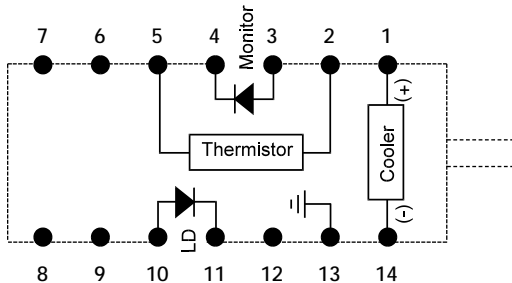

Lead Connections

- 1 Cooler (+)
- 2 Thermistor
- 3 Monitor PD Anode
- 4 Monitor PD Cathode
- 5 Thermistor
- 6 N/C
- 7 N/C
- 8 N/C
- 9 N/C
- 10 Laser Anode
- 11 Laser Cathode
- 12 N/C
- 13 Case Ground
- 14 Cooler (-)

User Safety

Safety and Operating Considerations

The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the fiber when the device is in operation.

CAUTION: THE USE OF OPTICAL INSTRUMENTS WITH THIS PRODUCT WILL INCREASE EYE HAZARD.

Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum peak optical power cannot be exceeded.

CW laser diodes may be damaged by excessive drive current or switching transients. When using power supplies, the laser diode should be connected with the main power on and the output voltage at zero. The current should be increased slowly while monitoring the laser diode output power and the drive current.

Careful attention to heatsinking and proper mounting of this device is required to insure specified performance over its operating life. To maximize thermal transfer to the heatsink, the heatsink mounting surface must be flat to within .001" and the mounting screws must be torqued down to 1.5 in.-lb.

ESD PROTECTION — Electro-static discharge is the primary cause of unexpected laser diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces, and rigorous anti-static techniques when handling laser diodes.

Ordering information

For more information on this or other products and their availability, please contact your local JDS Uniphase sales representative or JDS Uniphase directly at 408 943-4200, or by fax 408 943-4252, or via email at sales.ca@us.jdsuniphase.com. Visit our Web site at www.jdsuniphase.com.


21 CFR 1040.10 Compliance

Because of the small size of these devices, each of the labels shown is attached to the individual shipping container. They are illustrated here to comply with 21 CFR 1040.10 as applicable under the radiations control for health and safety act of 1968.

SERIAL NUMBER IDENTIFICATION LABEL



OUTPUT POWER AND LASER EMISSION INDICATOR LABEL

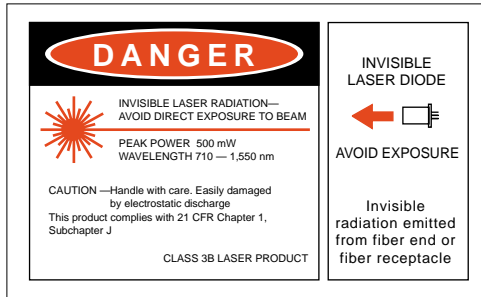

JDS Uniphase Corporation
 80 Rose Orchard Way
 San Jose, California
 95134 USA

Tel 408 943-4200
 Fax 408 954-4252
sales.ca@us.jdsuniphase.com
www.jdsuniphase.com

All information contained herein is believed to be accurate and is subject to change without notice. No responsibility is assumed for its use. JDS Uniphase Corporation, its subsidiaries and affiliates, or manufacturer, reserve the right to make changes, without notice, to product design, product components, and product manufacturing methods. Some specific combinations of options may not be available. Please contact JDS Uniphase for more information. ©JDS Uniphase Corporation. All rights reserved.